

**SUMMARY REPORT
858 WEST LAUREL BAY BOULEVARD (FORMERLY 141 WEST LAUREL
BAY BOULEVARD)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC**

**Revision: 0
Prepared for:**

**Department of the Navy
Naval Facilities Engineering Command, Mid-Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095**

and



**Naval Facilities Engineering Command Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095**

JUNE 2021

SUMMARY REPORT
858 WEST LAUREL BAY BOULEVARD (FORMERLY 141 WEST LAUREL BAY
BOULEVARD)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid- Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic

9324 Virginia Avenue
Norfolk, Virginia 23511-3095

Prepared by:



Multimedia Joint Venture
CDM - AECOM Multimedia Joint Venture
10560 Arrowhead Drive, Suite 500
Fairfax, Virginia 22030

Contract Number: N62470-14-D-9016
CTO WE52
JUNE 2021

Table of Contents

1.0	INTRODUCTION	1
1.1	BACKGROUND INFORMATION.....	1
1.2	UST REMOVAL AND ASSESSMENT PROCESS.....	2
2.0	SAMPLING ACTIVITIES AND RESULTS	3
2.1	UST REMOVAL AND SOIL SAMPLING	3
2.2	SOIL ANALYTICAL RESULTS.....	4
2.3	GROUNDWATER SAMPLING.....	4
2.4	GROUNDWATER ANALYTICAL RESULTS	5
3.0	PROPERTY STATUS	5
4.0	REFERENCES	5

Tables

Table 1	Laboratory Analytical Results - Soil
Table 2	Laboratory Analytical Results - Groundwater

Appendices

Appendix A	Multi-Media Selection Process for LBMH
Appendix B	UST Assessment Report
Appendix C	Laboratory Analytical Report - Groundwater
Appendix D	Regulatory Correspondence

List of Acronyms

bgs	below ground surface
BTEX	benzene, toluene, ethylbenzene, and xylenes
CTO	Contract Task Order
COPC	constituents of potential concern
ft	feet
IDIQ	Indefinite Delivery, Indefinite Quantity
IGWA	Initial Groundwater Assessment
JV	Joint Venture
LBMH	Laurel Bay Military Housing
MCAS	Marine Corps Air Station
NAVFAC Mid-Lant	Naval Facilities Engineering Command Mid-Atlantic
NFA	No Further Action
PAH	polynuclear aromatic hydrocarbon
QAPP	Quality Assurance Program Plan
RBSL	risk-based screening level
SCDHEC	South Carolina Department of Health and Environmental Control
Site	LBMH area at MCAS Beaufort, South Carolina
UST	underground storage tank
VISL	vapor intrusion screening level

1.0 INTRODUCTION

The CDM - AECOM Multimedia Joint Venture (JV) was contracted by the Naval Facilities Engineering Command, Mid-Atlantic (NAVFAC Mid-Lant) to provide reporting services for the heating oil underground storage tanks (USTs) located in Laurel Bay Military Housing (LBMH) area at the Marine Corps Air Station (MCAS) Beaufort, South Carolina (Site). This work has been awarded under Contract Task Order (CTO) WE52 of the Indefinite Delivery, Indefinite Quantity (IDIQ) Multimedia Environmental Compliance Contract (Contract No. N62470-14-D-9016).

As of January 2014, the LBMH addresses were re-numbered to comply with the E-911 emergency response addressing system; however, in order to remain consistent with historical sampling and reporting for LBMH area, the residences will continue to be referenced with their original address numbers in sample nomenclature and reporting documents.

This report summarizes the results the environmental investigation activities associated with the storage of home heating oil and the potential release of petroleum constituents at the referenced property. Based on the results of the investigation, a No Further Action (NFA) determination has been made by the South Carolina Department of Health and Environmental Control (SCDHEC) for 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard). This NFA determination indicates that there are no unacceptable risks to human health or the environment for the petroleum constituents associated with the home heating oil USTs. The following information is included in this report:

- Background information;
- Sampling activities and results; and
- A determination of the property status.

1.1 Background Information

The LBMH area is located approximately 3.5 miles west of MCAS Beaufort. The area is approximately 970 acres in size and serves as an enlisted and officer family housing area. The area is configured with single family and duplex residential structures, and includes recreation, open space, and community facilities. The community includes approximately 1,300 housing units, including legacy Capehart style homes and newer duplex style homes. The housing area

is bordered on the west by salt marshes and the Broad River, and to the north, east and south by uplands. Forested areas lie along the northern and northeastern borders.

Capehart style homes within the LBMH area were formerly heated using heating oil stored in USTs at each residence. There were 1,100 Capehart style housing units in the LBMH area. The newer duplex homes within the LBMH area never utilized heating oil tanks. Heating oil has not been used at Laurel Bay since the mid-1980s. As was the accepted practice at the time, USTs were drained, filled with dirt, capped, and left in place when they were removed from service. Residential USTs are not regulated in the State of South Carolina (i.e., there are no federal or state laws governing installation, management, or removal).

In 2007, MCAS Beaufort began a voluntary program to remove the unregulated, residential USTs and conduct sampling activities to determine if, and to what extent, petroleum constituents may have impacted the surrounding environment. MCAS Beaufort coordinated with SCDHEC to develop removal procedures that were consistent with procedural requirements for regulated USTs. All tank removal activities and follow-on actions are conducted in coordination with SCDHEC. To date, all known USTs have been removed from all residential properties within the LBMH area.

1.2 UST Removal and Assessment Process

During the UST removal process, a soil sample was collected from beneath the UST excavations (approximately 4 to 6 feet [ft] below ground surface [bgs]) and analyzed for a predetermined list of constituents of potential concern (COPCs) associated with the petroleum compounds found in home heating oil. These COPCs, derived from the *Quality Assurance Program Plan (QAPP) for the Underground Storage Tank Management Division, Revision 3.1* (SCDHEC, February 2016) and the *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, (SCDHEC, 2018), are as follows:

- benzene, toluene, ethylbenzene, and xylenes (BTEX),
- naphthalene, and
- five select polynuclear aromatic hydrocarbon (PAHs): benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene and dibenz(a,h)anthracene.

Soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form. In accordance with SCDHEC's *QAPP for the UST Management*

Division (SCDHEC, 2016), the soil screening levels consists of SCDHEC risk-based screening levels (RBSLs). It should be noted that the RBSLs for select PAHs were revised in Revision 2.0 of the QAPP (SCDHEC, 2013) and were revised again in Revision 3.0 (SCDHEC, 2015). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC.

The results of the soil sampling at each former UST location were used to determine if a potential for groundwater contamination exists (i.e., soil results greater than RBSLs) and subsequently to select properties for follow-up initial groundwater assessment (IGWA) sampling. The results of the IGWA sampling (if necessary) are used to determine the presence or absence of the aforementioned COPCs in groundwater and identify whether former UST locations will require additional delineation of COPCs in groundwater. In order to delineate the extent of impact to groundwater, permanent wells are installed and a sampling program is established for those former UST locations where IGWA sampling has indicated the presence of COPCs in excess of the SCDHEC RBSLs for groundwater. Groundwater analytical results are also compared to the site specific groundwater vapor intrusion screening levels (VISLs) to evaluate the potential for vapor intrusion and the necessity for an investigation associated with this media. A multi-media investigation selection process tree, applicable to the LBMH UST investigations, is presented as Appendix A.

2.0 SAMPLING ACTIVITIES AND RESULTS

The following section presents the sampling activities and associated results for 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard). Details regarding the soil investigation at this site are provided in the *SCDHEC UST Assessment Report – 141 Laurel Bay Boulevard* (MCAS Beaufort, 2011). The UST Assessment Report is provided in Appendix B. Details regarding the IGWA sampling activities at this site are provided in the *Initial Groundwater Investigation Report – November and December 2015* (Resolution Consultants, 2016). The laboratory report that includes the pertinent IGWA analytical results for this site is presented in Appendix C.

2.1 UST Removal and Soil Sampling

On September 8 2011, a single 280 gallon heating oil UST was removed from the front landscaped bed area adjacent to the front concrete porch at 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard). The former UST location is indicated on Figures 2

and 3 of the UST Assessment Report (Appendix B). The UST was removed, cleaned, and shipped offsite for recycling. There was no visual evidence (i.e., staining or sheen) of petroleum impact at the time of the UST removal. According to the UST Assessment Report (Appendix B), the depth to the base of the UST was 6'0" bgs and a single soil sample was collected from that depth. The sample was collected from the fill port side of the former UST to represent a worst case scenario.

Following UST removal, a soil sample was collected from the base of the excavation and shipped to an offsite laboratory for analysis of the petroleum COPCs. Sampling was performed in accordance with applicable South Carolina regulation R.61-92, Part 280 (SCDHEC, 2017) and assessment guidelines.

2.2 Soil Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 1. A copy of the laboratory analytical data report is included in the UST Assessment Report presented in Appendix B. The laboratory analytical data report includes the soil results for the additional PAHs that were analyzed, but do not have associated RBSLs.

The soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form (Appendix B). The results of the soil sampling at the former UST location were used by MCAS Beaufort, in consultation with SCDHEC, to determine a path forward (i.e., additional sampling or NFA) for the property. The soil results collected from 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard) were greater than the SCDHEC RBSLs, which indicated further investigation was required. In a letter dated July 1, 2015, SCDHEC requested an IGWA for 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard) to determine if the groundwater was impacted by petroleum COPCs. SCDHEC's request letter is provided in Appendix D.

2.3 Groundwater Sampling

On November 4, 2015, a temporary monitoring well was installed at 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard), in accordance with the South Carolina Well Standards and Regulations (R.61-71.H-I, updated June 24, 2016). In order to provide data that can be used to determine whether COPCs are migrating to underlying groundwater, the monitoring well was placed in the same general location as the former heating oil UST. The former UST location is indicated on Figures 2 and 3 of the UST

Assessment Report (Appendix B). Further details are provided in the *Initial Groundwater Investigation Report – November and December 2015* (Resolution Consultants, 2016).

The sampling strategy for this phase of the investigation required a one-time sampling event of the temporarily installed monitoring well. Following well installation and development, groundwater samples were collected using low-flow methods and shipped to an offsite laboratory for analysis of the petroleum COPCs. Upon completion of groundwater sampling, the temporary well was abandoned in accordance with the South Carolina Well Standards and Regulations R.61-71 (SCDHEC, 2016). Field forms are provided in the *Initial Groundwater Investigation Report – November and December 2015* (Resolution Consultants, 2016).

2.4 Groundwater Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 2. A copy of the laboratory analytical data report is included in Appendix C.

The groundwater results collected from 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard) were less than the SCDHEC RBSLs and the site specific groundwater VISLs (Table 2), which indicated that the groundwater was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.

3.0 PROPERTY STATUS

Based on the analytical results for groundwater, SCDHEC made the determination that NFA was required for 858 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard). This NFA determination was obtained in a letter dated June 8, 2016. SCDHEC's NFA letter is provided in Appendix D.

4.0 REFERENCES

Marine Corps Air Station Beaufort, 2011. *South Carolina Department of Health and Environmental Control (SCDHEC) Underground Storage Tank Assessment Report – 141 Laurel Bay Boulevard, Laurel Bay Military Housing Area*, December 2011.

Resolution Consultants, 2016. *Initial Groundwater Investigation Report – November and December 2015 for Laurel Bay Military Housing Area, Multiple Properties, Laurel Bay*

Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina, April 2016.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2013. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 2.0*, April 2013.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2015. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.0*, May 2015.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2016. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1*, February 2016.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2017. *R.61-92, Part 280, Underground Storage Tank Control Regulations*, March 2017.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2018. *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, March 2018.

South Carolina Department of Health and Environmental Control Bureau of Water, 2016. *R.61-71, Well Standards*, June 2016.

Tables

Table 1
Laboratory Analytical Results - Soil
838 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard)
Laurel Bay Military Housing Area
Marine Corps Air Station Beaufort
Beaufort, South Carolina

Constituent	SCDHEC RBSLs ⁽¹⁾	Results Sample Collected 09/22/11
Volatile Organic Compounds Analyzed by EPA Method 8260B (mg/kg)		
Benzene	0.003	ND
Ethylbenzene	1.15	0.0293
Naphthalene	0.036	1.94
Toluene	0.627	ND
Xylenes, Total	13.01	0.0391
Semivolatile Organic Compounds Analyzed by EPA Method 8270D (mg/kg)		
Benzo(a)anthracene	0.66	0.455
Benzo(b)fluoranthene	0.66	0.262
Benzo(k)fluoranthene	0.66	0.218
Chrysene	0.66	0.366
Dibenz(a,h)anthracene	0.66	ND

Notes:

⁽¹⁾ South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.0 and 3.1 (SCDHEC, May 2015 and SCDHEC, February 2016) and the Underground Storage Tank Assessment Guidelines (SCDHEC, February 2006).

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL.

EPA - United States Environmental Protection Agency

mg/kg - milligrams per kilogram

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The soil laboratory report is provided in Appendix B.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

Table 2
Laboratory Analytical Results - Groundwater
838 West Laurel Bay Boulevard (Formerly 141 West Laurel Bay Boulevard)
Laurel Bay Military Housing Area
Marine Corps Air Station Beaufort
Beaufort, South Carolina

Constituent	SCDHEC RBSLs ⁽¹⁾	Site-Specific Groundwater VISLs (µg/L) ⁽²⁾	Results Sample Collected 11/05/15
Volatile Organic Compounds Analyzed by EPA Method 8260B (µg/L)			
Benzene	5	16.24	ND
Ethylbenzene	700	45.95	0.2
Naphthalene	25	29.33	2.2
Toluene	1000	105,445	ND
Xylenes, Total	10,000	2,133	ND
Semivolatile Organic Compounds Analyzed by EPA Method 8270D (µg/L)			
Benzo(a)anthracene	10	NA	ND
Benzo(b)fluoranthene	10	NA	ND
Benzo(k)fluoranthene	10	NA	ND
Chrysene	10	NA	ND
Dibenz(a,h)anthracene	10	NA	ND

Notes:

(1) South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1 (SCDHEC, February 2016).

(2) Site-specific groundwater VISLs were calculated using the EPA JE Model Spreadsheets (Version 3.1, February 2004) and conservative modeling inputs representative of a small single-story house with an 8 foot ceiling. Site-specific groundwater VISLs were developed based on a target risk level of 1×10^{-6} , a target hazard quotient of 1 (per target organ), and a default residential exposure scenario, assuming exposure for 24 hours/day, 350 days/year, for 26 years. Modeling was performed for a range of depths to groundwater for application as appropriate in different areas of the Laurel Bay Military Housing Area. The most conservative levels are presented for comparison. Refer to Appendix H of the Uniform Federal Policy Sampling Analysis and Sampling Plan for Vapor Media, Revision 4 (Resolution Consultants, April 2017) for additional information.

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL and/or the Site-Specific Groundwater VISL.

EPA - United States Environmental Protection Agency

JE - Johnson & Ettinger

NA - Not Applicable

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The groundwater laboratory report is provided in Appendix C.


RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

µg/L - micrograms per liter

VISL - Vapor Intrusion Screening Level

Appendix A
Multi-Media Selection Process for LBMH

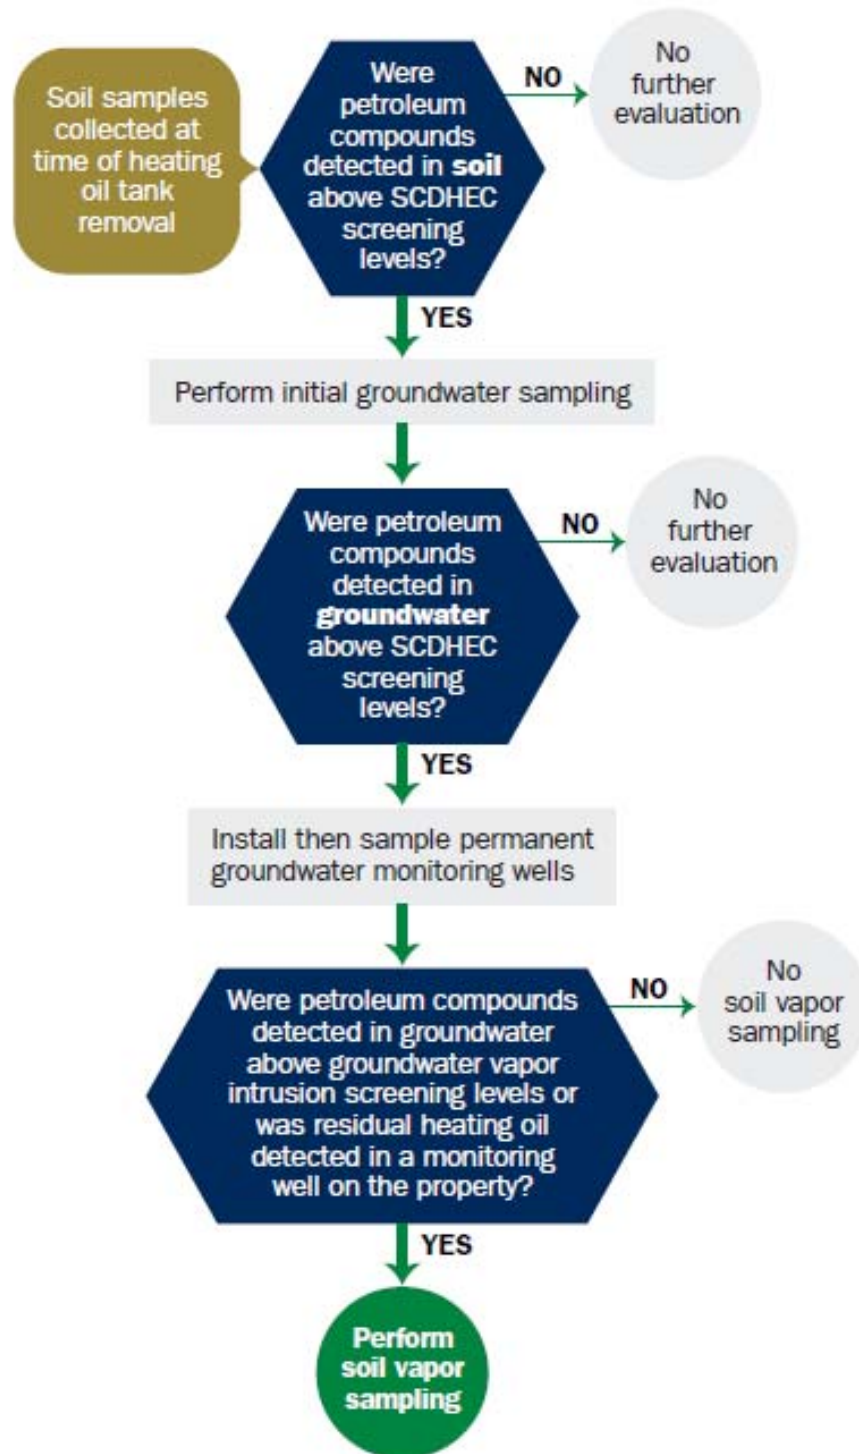

Appendix A - Multi-Media Selection Process for LBMH

Appendix B
UST Assessment Report

South Carolina Department of Health and Environmental Control (SCDHEC)
Underground Storage Tank (UST) Assessment Report

Date Received
State Use Only

Submit Completed Form To:
 UST Program
 SCDHEC
 2600 Bull Street
 Columbia, South Carolina 29201
 Telephone (803) 896-7957

RECEIVED

DEC 08 2011

SC DHEC - Bureau of
 Land & Waste Management

I. OWNERSHIP OF UST (S)

MCAS Beaufort, Commanding Officer Attn: NREAO (Craig Ehde)		
Owner Name (Corporation, Individual, Public Agency, Other)		
P.O. Box 55001		
Mailing Address		
Beaufort,	South Carolina	29904-5001
City	State	Zip Code
843	228-7317	Craig Ehde
Area Code	Telephone Number	Contact Person

II. SITE IDENTIFICATION AND LOCATION

Permit I.D. #	
Laurel Bay Military Housing Area, Marine Corps Air Station, Beaufort, SC	
Facility Name or Company Site Identifier	
141 Laurel Bay Boulevard, Laurel Bay Military Housing Area	
Street Address or State Road (as applicable)	
Beaufort,	Beaufort
City	County

III. INSURANCE INFORMATION

Insurance Statement

The petroleum release reported to DHEC on _____ at Permit ID Number _____ may qualify to receive state monies to pay for appropriate site rehabilitation activities. Before participation is allowed in the State Clean-up fund, written confirmation of the existence or non-existence of an environmental insurance policy is required. **This section must be completed.**

Is there now, or has there ever been an insurance policy or other financial mechanism that covers this UST release? **YES**____ **NO**____ (check one)

If you answered **YES** to the above question, please complete the following information:

My policy provider is: _____

The policy deductible is: _____

The policy limit is: _____

If you have this type of insurance, please include a copy of the policy with this report.

IV. REQUEST FOR SUPERB FUNDING

I **DO** / **DO NOT** wish to participate in the SUPERB Program. (Circle one.)

V. CERTIFICATION (To be signed by the UST owner)

I certify that I have personally examined and am familiar with the information submitted in this and all attached documents; and that based on my inquiry of those individuals responsible for obtaining this information, I believe that the submitted information is true, accurate, and complete.

Name (Type or print.)

Signature

To be completed by Notary Public:

Sworn before me this _____ day of _____, 20____

(Name)

Notary Public for the state of _____
Please affix State seal if you are commissioned outside South Carolina

VI. UST INFORMATION

- A. Product...(ex. Gas, Kerosene).....
- B. Capacity..(ex. 1k, 2k).....
- C. Age.....
- D. Construction Material..(ex. Steel, FRP).....
- E. Month/Year of Last Use.....
- F. Depth (ft.) To Base of Tank.....
- G. Spill Prevention Equipment Y/N.....
- H. Overfill Prevention Equipment Y/N.....
- I. Method of Closure Removed/Filled.....
- J. Date Tanks Removed/Filled.....
- K. Visible Corrosion or Pitting Y/N.....
- L. Visible Holes Y/N.....

141LaurelBB		
Heating oil		
280 gal		
Late 1950s		
Steel		
Mid 80s		
6'		
No		
No		
Removed		
9/8/2011		
Yes		
Yes		

- M. Method of disposal for any USTs removed from the ground (attach disposal manifests)
UST 141LaurelBB was removed from the ground, and disposed at a
Subtitle "D" landfill. See Attachment "A".
- N. Method of disposal for any liquid petroleum, sludges, or wastewaters removed from the USTs (attach disposal manifests)
UST 141LaurelBB had been previously filled with sand by others.
- O. If any corrosion, pitting, or holes were observed, describe the location and extent for each UST
Corrosion, pitting and holes were present throughout the tank.

VII. PIPING INFORMATION

- A. Construction Material..(ex. Steel, FRP).....
- B. Distance from UST to Dispenser.....
- C. Number of Dispensers.....
- D. Type of System Pressure or Suction.....
- E. Was Piping Removed from the Ground? Y/N
- F. Visible Corrosion or Pitting Y/N.....
- G. Visible Holes Y/N.....
- H. Age.....

141LaurelBB		
Steel & Copper		
N/A		
N/A		
Suction		
No		
Yes		
No		
Late 1950s		

- I. If any corrosion, pitting, or holes were observed, describe the location and extent for each piping run.

Steel vent piping for was corroded and pitted. All copper
supply and return piping were sound.

VIII. BRIEF SITE DESCRIPTION AND HISTORY

The USTs at the residences are constructed of single wall steel and formerly contained fuel oil for heating. These USTs were installed in the late 1950s and last used in the mid 1980s.

IX. SITE CONDITIONS

	Yes	No	Unk
A. Were any petroleum-stained or contaminated soils found in the UST excavation, soil borings, trenches, or monitoring wells? If yes, indicate depth and location on the site map.		X	
B. Were any petroleum odors detected in the excavation, soil borings, trenches, or monitoring wells? If yes, indicate location on site map and describe the odor (strong, mild, etc.)		X	
C. Was water present in the UST excavation, soil borings, or trenches? If yes, how far below land surface (indicate location and depth)?		X	
D. Did contaminated soils remain stockpiled on site after closure? If yes, indicate the stockpile location on the site map. Name of DHEC representative authorizing soil removal:		X	
E. Was a petroleum sheen or free product detected on any excavation or boring waters? If yes, indicate location and thickness.		X	

X. SAMPLE INFORMATION

A. SCDHEC Lab Certification Number 84009

B.

Sample #	Location	Sample Type (Soil/Water)	Soil Type (Sand/Clay)	Depth*	Date/Time of Collection	Collected by	OVA #
141Laurel Bay-a	Excav at fill end	Soil	Sandy	6'	*9/22/11 0915 hrs	P. Shaw	
	*UST 141Laurel BB's excavation was resampled at this later date. Due to shipping difficulties, temperature of the initial samples were unsatisfactory when they reached the testing facility.						
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

* = Depth Below the Surrounding Land Surface

XI. SAMPLING METHODOLOGY

Provide a detailed description of the methods used to collect and store the samples. Also include the preservative used for each sample. Please use the space provided below.

Sampling was performed in accordance with SC DHEC R.61-92 Part 280 and SC DHEC Assessment Guidelines. Sample containers were prepared by the testing laboratory. The grab method was utilized to fill the sample containers leaving as little head space as possible and immediately capped. Soil samples were extracted from area below tank. The samples were marked, logged, and immediately placed in a sample cooler packed with ice to maintain an approximate temperature of 4 degrees Centigrade. Tools were thoroughly cleaned and decontaminated with the seven step decon process after each use. The samples remained in custody of SBG-EEG, Inc. until they were transferred to Test America Incorporated for analysis as documented in the Chain of Custody Record.


XII. RECEPTORS

	Yes	No
A. Are there any lakes, ponds, streams, or wetlands located within 1000 feet of the UST system? *X *Approx 980' to Broad River If yes, indicate type of receptor, distance, and direction on site map.	*X	
B. Are there any public, private, or irrigation water supply wells within 1000 feet of the UST system? If yes, indicate type of well, distance, and direction on site map.		X
C. Are there any underground structures (e.g., basements) Located within 100 feet of the UST system? If yes, indicate type of structure, distance, and direction on site map.		X
D. Are there any underground utilities (e.g., telephone, electricity, gas, water, sewer, storm drain) located within 100 feet of the UST system that could potentially come in contact with the contamination? *X *Sewer, water, electricity, cable & fiber optic If yes, indicate the type of utility, distance, and direction on the site map.	*X	
E. Has contaminated soil been identified at a depth less than 3 feet below land surface in an area that is not capped by asphalt or concrete? If yes, indicate the area of contaminated soil on the site map.		X


XIII. SITE MAP

You must supply a scaled site map. It should include all buildings, road names, utilities, tank and dispenser island locations, labeled sample locations, extent of excavation, and any other pertinent information.

(Attach Site Map Here)

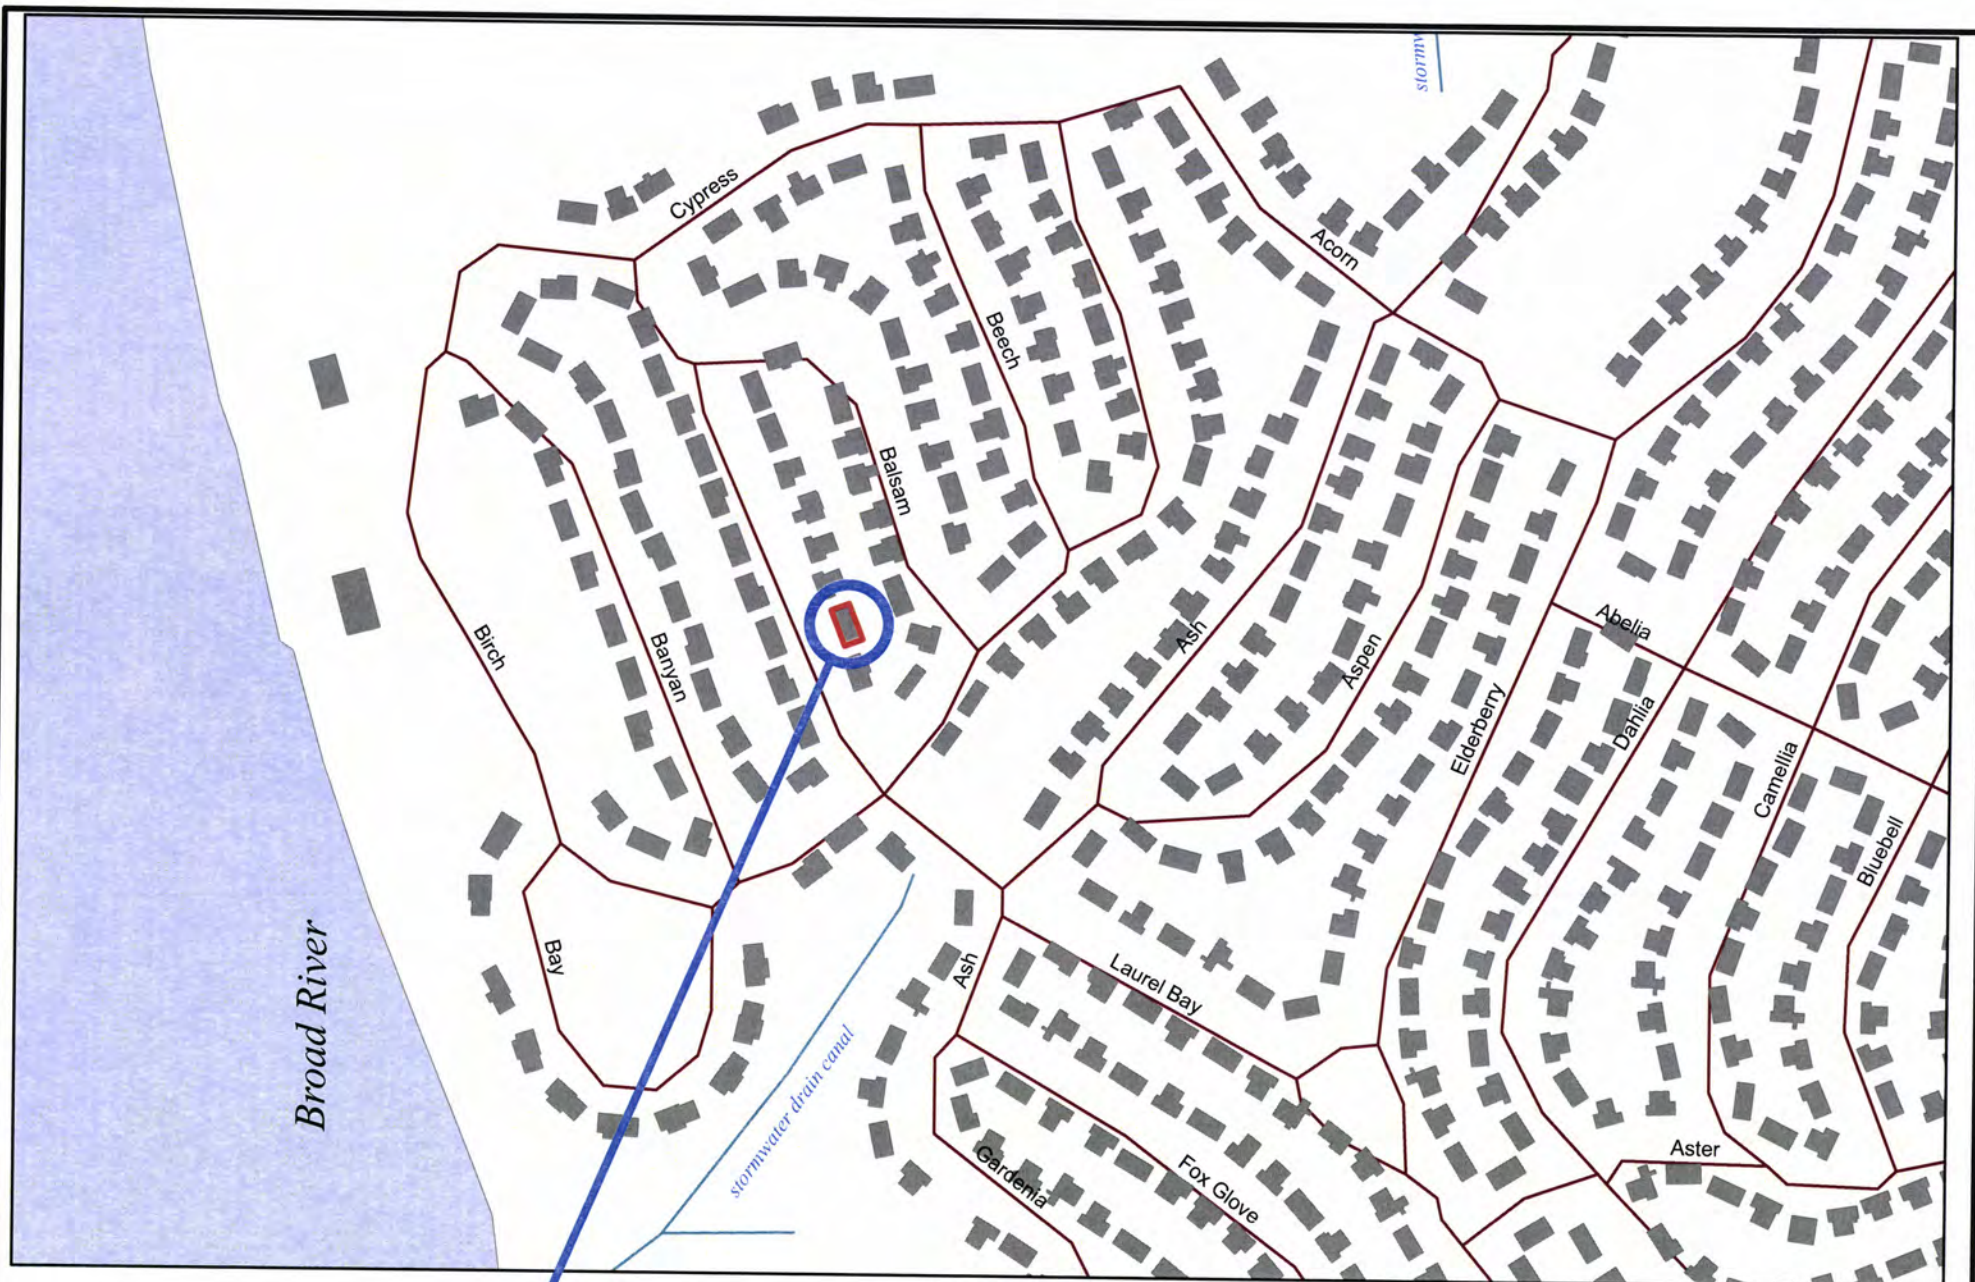

141 LAUREL BAY BLVD.



SBG-EEG, Inc.

398 E. 5th North Street, Suite C
Summerville SC 29483-6954

Ph. (843) 875-1930

Drawn By: L. DiAsio

Dwg Date: OCT 2011

FIGURE 1: LOCATION MAP
141 LAUREL BAY BLVD.
LAUREL BAY, BEAUFORT SC



BROAD RIVER $\approx$ 980'

141 LAUREL BAY BLVD.
LAUREL BAY MILITARY HOUSING
MCAS BEAUFORT, SC

CONCRETE PORCH

CONCRETE WALK

ASPHALT
DRIVEWAY

UST 141LAURELBB,
280 GAL.

GRAPHIC SCALE

0 5' 10' 20'

SBG-EEG

398 E. 5 NORTH ST., SUITE C
SUMMERVILLE, SC
29483-6954

FIGURE 2 SITE MAP
141 LAUREL BAY BLVD., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE OCT 2011

141 LAUREL BAY BLVD.

EXCAVATION


FILL END

UST 141LAURELBB

SOIL SAMPLE
141 LAUREL BAY-a

BROAD RIVER ≈ 980'

GRAPHIC SCALE



TANK WAS 36" BELOW GRADE

SBG-EEG

398 E. 5 NORTH ST, SUITE C
SUMMERVILLE, SC
29483-6954

FIGURE 3 UST SAMPLE LOCATIONS
141 LAUREL BAY BLVD., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE OCT 2011



Picture 1: UST 141LaurelBB location.



Picture 2: UST 141LaurelBB excavation in progress.

XIV. SUMMARY OF ANALYSIS RESULTS

Enter the soil analytical data for each soil boring for all COC in the table below and on the following page.

CoC	UST	141LaurelBB					
Benzene		ND					
Toluene		ND					
Ethylbenzene		0.0293 mg/kg					
Xylenes		0.0391 mg/kg					
Naphthalene		1.94 mg/kg					
Benzo (a) anthracene		0.455 mg/kg					
Benzo (b) fluoranthene		0.262 mg/kg					
Benzo (k) fluoranthene		0.218 mg/kg					
Chrysene		0.366 mg/kg					
Dibenz (a, h) anthracene		ND					
TPH (EPA 3550)							

CoC							
Benzene							
Toluene							
Ethylbenzene							
Xylenes							
Naphthalene							
Benzo (a) anthracene							
Benzo (b) fluoranthene							
Benzo (k) fluoranthene							
Chrysene							
Dibenz (a, h) anthracene							
TPH (EPA 3550)							

SUMMARY OF ANALYSIS RESULTS (cont'd)

Enter the ground water analytical data for each sample for all CoC in the table below. If free product is present, indicate the measured thickness to the nearest 0.01 feet.

CoC	RBSL (µg/l)	W-1	W-2	W -3	W -4
Free Product Thickness	None				
Benzene	5				
Toluene	1,000				
Ethylbenzene	700				
Xylenes	10,000				
Total BTEX	N/A				
MTBE	40				
Naphthalene	25				
Benzo (a) anthracene	10				
Benzo (b) flouranthene	10				
Benzo (k) flouranthene	10				
Chrysene	10				
Dibenz (a, h) anthracene	10				
EDB	.05				
1,2-DCA	5				
Lead	Site specific				

XV. ANALYTICAL RESULTS

You must submit the laboratory report and chain-of-custody form for the samples. These samples must be analyzed by a South Carolina certified laboratory.

(Attach Certified Analytical Results and Chain-of-Custody Here)
(Please see Form #4)

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

ANALYTICAL REPORT

TestAmerica Laboratories, Inc.

TestAmerica Nashville
2960 Foster Creighton Road
Nashville, TN 37204
Tel: 800-765-0980

TestAmerica Job ID: NUI3262


Client Project/Site: [none]

Client Project Description: Laurel Bay Housing Project

For:

EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456

Attn: Tom McElwee



Authorized for release by:
10/10/2011 12:53:58 PM

Ken A. Hayes
Senior Project Manager
ken.hayes@testamericainc.com

LINKS

Review your project
results through

TotalAccess

Have a Question?



Visit us at:

www.testamericainc.com

This report has been electronically signed and authorized by the signatory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

Table of Contents

Cover Page	1
Table of Contents	2
Sample Summary	3
Definitions	4
Client Sample Results	5
QC Sample Results	11
QC Association	17
Chronicle	19
Method Summary	21
Certification Summary	22
Chain of Custody	23

Sample Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Lab Sample ID	Client Sample ID	Matrix	Collected	Received
NUI3262-01	159 Cypress-1	Soil	09/19/11 13:00	09/24/11 09:00
NUI3262-02	159 Cypress-2	Soil	09/20/11 11:15	09/24/11 09:00
NUI3262-03	400 Elderberry	Soil	09/21/11 13:45	09/24/11 09:00
NUI3262-04	141 Laurel Bay-a	Soil	09/22/11 09:15	09/24/11 09:00
NUI3262-05	153 Laurel Bay-a	Soil	09/22/11 09:45	09/24/11 09:00
NUI3262-06	155 Laurel Bay-a	Soil	09/22/11 10:45	09/24/11 09:00

Definitions/Glossary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Qualifiers

GCMS Volatiles

Qualifier	Qualifier Description
ZX	Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.
M1	The MS and/or MSD were above the acceptance limits due to sample matrix interference. See Blank Spike (LCS).
RL1	Reporting limit raised due to sample matrix effects.

GCMS Semivolatiles

Qualifier	Qualifier Description
J	Result is less than the RL but greater than or equal to the MDL and the concentration is an approximate value.

Glossary

Abbreviation	These commonly used abbreviations may or may not be present in this report.
☆	Listed under the "D" column to designate that the result is reported on a dry weight basis
%R	Percent Recovery
CNF	Contains no Free Liquid
DL, RA, RE, IN	Indicates a Dilution, Reanalysis, Re-extraction, or additional Initial metals/anion analysis of the sample
EDL	Estimated Detection Limit
EPA	United States Environmental Protection Agency
MDL	Method Detection Limit
ML	Minimum Level (Dioxin)
ND	Not detected at the reporting limit (or MDL or EDL if shown)
PQL	Practical Quantitation Limit
RL	Reporting Limit
RPD	Relative Percent Difference, a measure of the relative difference between two points
TEF	Toxicity Equivalent Factor (Dioxin)
TEQ	Toxicity Equivalent Quotient (Dioxin)

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Client Sample ID: 159 Cypress-1

Lab Sample ID: NUI3262-01

Date Collected: 09/19/11 13:00

Matrix: Soil

Date Received: 09/24/11 09:00

Percent Solids: 83.5

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00188	0.00103	mg/kg dry	✱	09/19/11 13:00	09/28/11 14:02	1.00
Ethylbenzene	ND		0.00188	0.00103	mg/kg dry	✱	09/19/11 13:00	09/28/11 14:02	1.00
Naphthalene	ND		0.00470	0.00235	mg/kg dry	✱	09/19/11 13:00	09/28/11 14:02	1.00
Toluene	ND		0.00188	0.00103	mg/kg dry	✱	09/19/11 13:00	09/28/11 14:02	1.00
Xylenes, total	ND		0.00470	0.00235	mg/kg dry	✱	09/19/11 13:00	09/28/11 14:02	1.00

Surrogate	% Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	98		70 - 130	09/19/11 13:00	09/28/11 14:02	1.00
Dibromofluoromethane	95		70 - 130	09/19/11 13:00	09/28/11 14:02	1.00
Toluene-d8	100		70 - 130	09/19/11 13:00	09/28/11 14:02	1.00
4-Bromofluorobenzene	97		70 - 130	09/19/11 13:00	09/28/11 14:02	1.00

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Acenaphthylene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Anthracene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Benzo (a) anthracene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Benzo (a) pyrene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Benzo (b) fluoranthene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Benzo (g,h,i) perylene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Benzo (k) fluoranthene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Chrysene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Dibenz (a,h) anthracene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Fluoranthene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Fluorene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Naphthalene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Phenanthrene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
Pyrene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
1-Methylnaphthalene	0.0433	J	0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00
2-Methylnaphthalene	ND		0.0798	0.0405	mg/kg dry	✱	09/27/11 07:57	09/28/11 04:06	1.00

Surrogate	% Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
Terphenyl-d14	71		18 - 120	09/27/11 07:57	09/28/11 04:06	1.00
2-Fluorobiphenyl	59		14 - 120	09/27/11 07:57	09/28/11 04:06	1.00
Nitrobenzene-d5	56		17 - 120	09/27/11 07:57	09/28/11 04:06	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	83.5		0.500	0.500	%		09/28/11 10:28	09/29/11 11:06	1.00

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Client Sample ID: 159 Cypress-2

Date Collected: 09/20/11 11:15

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-02

Matrix: Soil
Percent Solids: 95.9

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B - RE1

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00223	0.00123	mg/kg dry	☼	09/20/11 11:15	09/30/11 14:18	1.00
Ethylbenzene	ND		0.00223	0.00123	mg/kg dry	☼	09/20/11 11:15	09/30/11 14:18	1.00
Toluene	ND		0.00223	0.00123	mg/kg dry	☼	09/20/11 11:15	09/30/11 14:18	1.00
Xylenes, total	ND		0.00557	0.00279	mg/kg dry	☼	09/20/11 11:15	09/30/11 14:18	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	106		70 - 130				09/20/11 11:15	09/30/11 14:18	1.00
Dibromofluoromethane	100		70 - 130				09/20/11 11:15	09/30/11 14:18	1.00
Toluene-d8	111		70 - 130				09/20/11 11:15	09/30/11 14:18	1.00
4-Bromofluorobenzene	147	ZX	70 - 130				09/20/11 11:15	09/30/11 14:18	1.00

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B - RE2

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Naphthalene	ND	RL1	0.323	0.161	mg/kg dry	☼	09/20/11 11:15	09/30/11 14:49	50.0
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	99		70 - 130				09/20/11 11:15	09/30/11 14:49	50.0
Dibromofluoromethane	91		70 - 130				09/20/11 11:15	09/30/11 14:49	50.0
Toluene-d8	97		70 - 130				09/20/11 11:15	09/30/11 14:49	50.0
4-Bromofluorobenzene	98		70 - 130				09/20/11 11:15	09/30/11 14:49	50.0

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Acenaphthylene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Anthracene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Benzo (a) anthracene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Benzo (a) pyrene	0.0783		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Benzo (b) fluoranthene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Benzo (g,h,i) perylene	0.0695		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Benzo (k) fluoranthene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Chrysene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Dibenz (a,h) anthracene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Fluoranthene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Fluorene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Naphthalene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Phenanthrene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Pyrene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
1-Methylnaphthalene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
2-Methylnaphthalene	ND		0.0685	0.0347	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:27	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
Terphenyl-d14	66		18 - 120				09/27/11 07:57	09/28/11 04:27	1.00
2-Fluorobiphenyl	51		14 - 120				09/27/11 07:57	09/28/11 04:27	1.00
Nitrobenzene-d5	51		17 - 120				09/27/11 07:57	09/28/11 04:27	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	95.9		0.500	0.500	%		09/28/11 10:28	09/29/11 11:06	1.00

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Client Sample ID: 400 Elderberry

Date Collected: 09/21/11 13:45

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-03

Matrix: Soil
Percent Solids: 82.7

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00245	0.00135	mg/kg dry	☼	09/21/11 13:45	09/28/11 15:04	1.00
Ethylbenzene	ND		0.00245	0.00135	mg/kg dry	☼	09/21/11 13:45	09/28/11 15:04	1.00
Naphthalene	ND		0.00613	0.00306	mg/kg dry	☼	09/21/11 13:45	09/28/11 15:04	1.00
Toluene	ND		0.00245	0.00135	mg/kg dry	☼	09/21/11 13:45	09/28/11 15:04	1.00
Xylenes, total	ND		0.00613	0.00306	mg/kg dry	☼	09/21/11 13:45	09/28/11 15:04	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	99		70 - 130				09/21/11 13:45	09/28/11 15:04	1.00
Dibromofluoromethane	98		70 - 130				09/21/11 13:45	09/28/11 15:04	1.00
Toluene-d8	105		70 - 130				09/21/11 13:45	09/28/11 15:04	1.00
4-Bromofluorobenzene	117		70 - 130				09/21/11 13:45	09/28/11 15:04	1.00

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Acenaphthylene	ND		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Anthracene	0.322		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Benzo (a) anthracene	2.04		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Benzo (a) pyrene	0.940		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Benzo (b) fluoranthene	1.53		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Benzo (g,h,i) perylene	0.387		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Benzo (k) fluoranthene	0.959		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Chrysene	2.42		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Dibenz (a,h) anthracene	0.186		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Fluoranthene	4.09		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Fluorene	ND		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Indeno (1,2,3-cd) pyrene	0.407		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Naphthalene	ND		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Phenanthrene	1.18		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Pyrene	3.44		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
1-Methylnaphthalene	ND		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
2-Methylnaphthalene	ND		0.0788	0.0400	mg/kg dry	☼	09/27/11 07:57	09/28/11 04:47	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
Terphenyl-d14	72		18 - 120				09/27/11 07:57	09/28/11 04:47	1.00
2-Fluorobiphenyl	62		14 - 120				09/27/11 07:57	09/28/11 04:47	1.00
Nitrobenzene-d5	61		17 - 120				09/27/11 07:57	09/28/11 04:47	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	82.7		0.500	0.500	%		09/28/11 10:28	09/29/11 11:06	1.00

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Client Sample ID: 141 Laurel Bay-a

Date Collected: 09/22/11 09:15

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-04

Matrix: Soil
Percent Solids: 77.6

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00195	0.00107	mg/kg dry	☼	09/22/11 09:15	09/28/11 15:36	1.00
Ethylbenzene	0.0293		0.00195	0.00107	mg/kg dry	☼	09/22/11 09:15	09/28/11 15:36	1.00
Toluene	ND		0.00195	0.00107	mg/kg dry	☼	09/22/11 09:15	09/28/11 15:36	1.00
Xylenes, total	0.0391		0.00487	0.00243	mg/kg dry	☼	09/22/11 09:15	09/28/11 15:36	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	97		70 - 130				09/22/11 09:15	09/28/11 15:36	1.00
Dibromofluoromethane	97		70 - 130				09/22/11 09:15	09/28/11 15:36	1.00
Toluene-d8	108		70 - 130				09/22/11 09:15	09/28/11 15:36	1.00
4-Bromofluorobenzene	141	ZX	70 - 130				09/22/11 09:15	09/28/11 15:36	1.00

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B - RE1

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Naphthalene	1.94		0.246	0.123	mg/kg dry	☼	09/22/11 09:15	09/30/11 17:56	50.0
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	101		70 - 130				09/22/11 09:15	09/30/11 17:56	50.0
Dibromofluoromethane	87		70 - 130				09/22/11 09:15	09/30/11 17:56	50.0
Toluene-d8	99		70 - 130				09/22/11 09:15	09/30/11 17:56	50.0
4-Bromofluorobenzene	95		70 - 130				09/22/11 09:15	09/30/11 17:56	50.0

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	0.137		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Acenaphthylene	ND		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Anthracene	0.185		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Benzo (a) anthracene	0.455		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Benzo (a) pyrene	0.220		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Benzo (b) fluoranthene	0.262		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Benzo (g,h,i) perylene	0.0634	J	0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Benzo (k) fluoranthene	0.218		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Chrysene	0.366		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Dibenz (a,h) anthracene	ND		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Fluoranthene	1.14		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Fluorene	0.289		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Indeno (1,2,3-cd) pyrene	0.0702	J	0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Naphthalene	0.197		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Phenanthrene	1.04		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Pyrene	1.03		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
1-Methylnaphthalene	0.743		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
2-Methylnaphthalene	1.27		0.0855	0.0434	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:08	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
Terphenyl-d14	78		18 - 120				09/27/11 07:57	09/28/11 05:08	1.00
2-Fluorobiphenyl	60		14 - 120				09/27/11 07:57	09/28/11 05:08	1.00
Nitrobenzene-d5	57		17 - 120				09/27/11 07:57	09/28/11 05:08	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	77.6		0.500	0.500	%		09/28/11 10:28	09/29/11 11:06	1.00

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Client Sample ID: 153 Laurel Bay-a

Lab Sample ID: NUI3262-05

Date Collected: 09/22/11 09:45

Matrix: Soil

Date Received: 09/24/11 09:00

Percent Solids: 77.9

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00222	0.00122	mg/kg dry	☼	09/22/11 09:45	09/28/11 16:07	1.00
Ethylbenzene	ND		0.00222	0.00122	mg/kg dry	☼	09/22/11 09:45	09/28/11 16:07	1.00
Naphthalene	ND		0.00556	0.00278	mg/kg dry	☼	09/22/11 09:45	09/28/11 16:07	1.00
Toluene	ND		0.00222	0.00122	mg/kg dry	☼	09/22/11 09:45	09/28/11 16:07	1.00
Xylenes, total	ND		0.00556	0.00278	mg/kg dry	☼	09/22/11 09:45	09/28/11 16:07	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	87		70 - 130				09/22/11 09:45	09/28/11 16:07	1.00
Dibromofluoromethane	91		70 - 130				09/22/11 09:45	09/28/11 16:07	1.00
Toluene-d8	104		70 - 130				09/22/11 09:45	09/28/11 16:07	1.00
4-Bromofluorobenzene	100		70 - 130				09/22/11 09:45	09/28/11 16:07	1.00

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Acenaphthylene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Anthracene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Benzo (a) anthracene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Benzo (a) pyrene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Benzo (b) fluoranthene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Benzo (g,h,i) perylene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Benzo (k) fluoranthene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Chrysene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Dibenz (a,h) anthracene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Fluoranthene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Fluorene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Naphthalene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Phenanthrene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Pyrene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
1-Methylnaphthalene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
2-Methylnaphthalene	ND		0.0847	0.0430	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:30	1.00
Surrogate	% Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
Terphenyl-d14	68		18 - 120				09/27/11 07:57	09/28/11 05:30	1.00
2-Fluorobiphenyl	52		14 - 120				09/27/11 07:57	09/28/11 05:30	1.00
Nitrobenzene-d5	52		17 - 120				09/27/11 07:57	09/28/11 05:30	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	77.9		0.500	0.500	%		09/28/11 10:28	09/29/11 11:06	1.00

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)

TestAmerica Job ID: NUI3262

Project/Site: [none]

Client Sample ID: 155 Laurel Bay-a

Lab Sample ID: NUI3262-06

Date Collected: 09/22/11 10:45

Matrix: Soil

Date Received: 09/24/11 09:00

Percent Solids: 88.1

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00265	0.00146	mg/kg dry	☼	09/22/11 10:45	09/28/11 16:38	1.00
Ethylbenzene	ND		0.00265	0.00146	mg/kg dry	☼	09/22/11 10:45	09/28/11 16:38	1.00
Naphthalene	ND		0.00663	0.00332	mg/kg dry	☼	09/22/11 10:45	09/28/11 16:38	1.00
Toluene	ND		0.00265	0.00146	mg/kg dry	☼	09/22/11 10:45	09/28/11 16:38	1.00
Xylenes, total	ND		0.00663	0.00332	mg/kg dry	☼	09/22/11 10:45	09/28/11 16:38	1.00

Surrogate	% Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	101		70 - 130	09/22/11 10:45	09/28/11 16:38	1.00
Dibromofluoromethane	97		70 - 130	09/22/11 10:45	09/28/11 16:38	1.00
Toluene-d8	100		70 - 130	09/22/11 10:45	09/28/11 16:38	1.00
4-Bromofluorobenzene	97		70 - 130	09/22/11 10:45	09/28/11 16:38	1.00

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Acenaphthylene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Anthracene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Benzo (a) anthracene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Benzo (a) pyrene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Benzo (b) fluoranthene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Benzo (g,h,i) perylene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Benzo (k) fluoranthene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Chrysene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Dibenz (a,h) anthracene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Fluoranthene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Fluorene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Naphthalene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Phenanthrene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
Pyrene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
1-Methylnaphthalene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00
2-Methylnaphthalene	ND		0.0751	0.0381	mg/kg dry	☼	09/27/11 07:57	09/28/11 05:50	1.00

Surrogate	% Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
Terphenyl-d14	77		18 - 120	09/27/11 07:57	09/28/11 05:50	1.00
2-Fluorobiphenyl	62		14 - 120	09/27/11 07:57	09/28/11 05:50	1.00
Nitrobenzene-d5	63		17 - 120	09/27/11 07:57	09/28/11 05:50	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	88.1		0.500	0.500	%		09/28/11 10:28	09/29/11 11:06	1.00

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Lab Sample ID: 11I5281-BLK1

Matrix: Soil

Analysis Batch: U017358

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 11I5281_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00200	0.00110	mg/kg wet		09/28/11 09:51	09/28/11 11:56	1.00
Ethylbenzene	ND		0.00200	0.00110	mg/kg wet		09/28/11 09:51	09/28/11 11:56	1.00
Naphthalene	ND		0.00500	0.00250	mg/kg wet		09/28/11 09:51	09/28/11 11:56	1.00
Toluene	ND		0.00200	0.00110	mg/kg wet		09/28/11 09:51	09/28/11 11:56	1.00
Xylenes, total	ND		0.00500	0.00250	mg/kg wet		09/28/11 09:51	09/28/11 11:56	1.00
Surrogate	Blank % Recovery	Blank Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	99		70 - 130				09/28/11 09:51	09/28/11 11:56	1.00
Dibromofluoromethane	98		70 - 130				09/28/11 09:51	09/28/11 11:56	1.00
Toluene-d8	101		70 - 130				09/28/11 09:51	09/28/11 11:56	1.00
4-Bromofluorobenzene	97		70 - 130				09/28/11 09:51	09/28/11 11:56	1.00

Lab Sample ID: 11I5281-BLK2

Matrix: Soil

Analysis Batch: U017358

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 11I5281_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.100	0.0550	mg/kg wet		09/28/11 09:51	09/28/11 12:27	50.0
Ethylbenzene	ND		0.100	0.0550	mg/kg wet		09/28/11 09:51	09/28/11 12:27	50.0
Naphthalene	ND		0.250	0.125	mg/kg wet		09/28/11 09:51	09/28/11 12:27	50.0
Toluene	ND		0.100	0.0550	mg/kg wet		09/28/11 09:51	09/28/11 12:27	50.0
Xylenes, total	ND		0.250	0.125	mg/kg wet		09/28/11 09:51	09/28/11 12:27	50.0
Surrogate	Blank % Recovery	Blank Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	99		70 - 130				09/28/11 09:51	09/28/11 12:27	50.0
Dibromofluoromethane	97		70 - 130				09/28/11 09:51	09/28/11 12:27	50.0
Toluene-d8	100		70 - 130				09/28/11 09:51	09/28/11 12:27	50.0
4-Bromofluorobenzene	97		70 - 130				09/28/11 09:51	09/28/11 12:27	50.0

Lab Sample ID: 11I5281-BS1

Matrix: Soil

Analysis Batch: U017358

Client Sample ID: Lab Control Sample

Prep Type: Total

Prep Batch: 11I5281_P

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	% Rec	% Rec. Limits
Benzene	50.0	54.4		ug/kg		109	75 - 127
Ethylbenzene	50.0	57.4		ug/kg		115	80 - 134
Naphthalene	50.0	57.3		ug/kg		115	69 - 150
Toluene	50.0	56.8		ug/kg		114	80 - 132
Xylenes, total	150	174		ug/kg		116	80 - 137
Surrogate	LCS % Recovery	LCS Qualifier	Limits				
1,2-Dichloroethane-d4	98		70 - 130				
Dibromofluoromethane	99		70 - 130				
Toluene-d8	101		70 - 130				
4-Bromofluorobenzene	96		70 - 130				

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B (Continued)

Lab Sample ID: 11I5281-MS1

Matrix: Soil

Analysis Batch: U017358

Client Sample ID: Matrix Spike

Prep Type: Total

Prep Batch: 11I5281_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Result	Matrix Spike Qualifier	Unit	D	% Rec	Limits
Benzene	1.94		2.18	4.98		mg/kg wet		139	31 - 143
Ethylbenzene	10.7		2.18	14.3	M1	mg/kg wet		165	23 - 161
Naphthalene	6.46		2.18	10.6	M1	mg/kg wet		191	10 - 176
Toluene	0.118		2.18	2.84		mg/kg wet		125	30 - 155
Xylenes, total	1.20		6.54	9.57		mg/kg wet		128	25 - 162

Surrogate	Matrix Spike % Recovery	Matrix Spike Qualifier	Limits
1,2-Dichloroethane-d4	107		70 - 130
Dibromofluoromethane	96		70 - 130
Toluene-d8	177	ZX	70 - 130
4-Bromofluorobenzene	131	ZX	70 - 130

Lab Sample ID: 11I5281-MSD1

Matrix: Soil

Analysis Batch: U017358

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total

Prep Batch: 11I5281_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Dup Result	Matrix Spike Dup Qualifier	Unit	D	% Rec	Limits	RPD	Limit
Benzene	1.94		2.18	4.77		mg/kg wet		130	31 - 143	4	50
Ethylbenzene	10.7		2.18	13.9		mg/kg wet		146	23 - 161	3	50
Naphthalene	6.46		2.18	10.7	M1	mg/kg wet		195	10 - 176	0.7	50
Toluene	0.118		2.18	2.66		mg/kg wet		116	30 - 155	7	50
Xylenes, total	1.20		6.54	9.25		mg/kg wet		123	25 - 162	3	50

Surrogate	Matrix Spike Dup % Recovery	Matrix Spike Dup Qualifier	Limits
1,2-Dichloroethane-d4	111		70 - 130
Dibromofluoromethane	99		70 - 130
Toluene-d8	171	ZX	70 - 130
4-Bromofluorobenzene	136	ZX	70 - 130

Lab Sample ID: 11I6327-BLK1

Matrix: Soil

Analysis Batch: U017446

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 11I6327_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00200	0.00110	mg/kg wet		09/30/11 10:09	09/30/11 12:14	1.00
Ethylbenzene	ND		0.00200	0.00110	mg/kg wet		09/30/11 10:09	09/30/11 12:14	1.00
Naphthalene	ND		0.00500	0.00250	mg/kg wet		09/30/11 10:09	09/30/11 12:14	1.00
Toluene	ND		0.00200	0.00110	mg/kg wet		09/30/11 10:09	09/30/11 12:14	1.00
Xylenes, total	ND		0.00500	0.00250	mg/kg wet		09/30/11 10:09	09/30/11 12:14	1.00

Surrogate	Blank % Recovery	Blank Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	96		70 - 130	09/30/11 10:09	09/30/11 12:14	1.00
Dibromofluoromethane	97		70 - 130	09/30/11 10:09	09/30/11 12:14	1.00
Toluene-d8	101		70 - 130	09/30/11 10:09	09/30/11 12:14	1.00
4-Bromofluorobenzene	97		70 - 130	09/30/11 10:09	09/30/11 12:14	1.00

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B (Continued)

Lab Sample ID: 11I6327-BLK2

Matrix: Soil

Analysis Batch: U017446

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 11I6327_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.100	0.0550	mg/kg wet		09/30/11 10:09	09/30/11 12:45	50.0
Ethylbenzene	ND		0.100	0.0550	mg/kg wet		09/30/11 10:09	09/30/11 12:45	50.0
Naphthalene	ND		0.250	0.125	mg/kg wet		09/30/11 10:09	09/30/11 12:45	50.0
Toluene	ND		0.100	0.0550	mg/kg wet		09/30/11 10:09	09/30/11 12:45	50.0
Xylenes, total	ND		0.250	0.125	mg/kg wet		09/30/11 10:09	09/30/11 12:45	50.0

Surrogate	Blank % Recovery	Blank Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	98		70 - 130	09/30/11 10:09	09/30/11 12:45	50.0
Dibromofluoromethane	98		70 - 130	09/30/11 10:09	09/30/11 12:45	50.0
Toluene-d8	100		70 - 130	09/30/11 10:09	09/30/11 12:45	50.0
4-Bromofluorobenzene	97		70 - 130	09/30/11 10:09	09/30/11 12:45	50.0

Lab Sample ID: 11I6327-BS1

Matrix: Soil

Analysis Batch: U017446

Client Sample ID: Lab Control Sample

Prep Type: Total

Prep Batch: 11I6327_P

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	% Rec	% Rec. Limits
Benzene	50.0	56.1		ug/kg		112	75 - 127
Ethylbenzene	50.0	59.0		ug/kg		118	80 - 134
Naphthalene	50.0	64.8		ug/kg		130	69 - 150
Toluene	50.0	58.0		ug/kg		116	80 - 132
Xylenes, total	150	178		ug/kg		119	80 - 137

Surrogate	LCS % Recovery	LCS Qualifier	Limits
1,2-Dichloroethane-d4	101		70 - 130
Dibromofluoromethane	98		70 - 130
Toluene-d8	100		70 - 130
4-Bromofluorobenzene	97		70 - 130

Lab Sample ID: 11I6327-MS1

Matrix: Soil

Analysis Batch: U017446

Client Sample ID: Matrix Spike

Prep Type: Total

Prep Batch: 11I6327_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Result	Matrix Spike Qualifier	Unit	D	% Rec	% Rec. Limits
Benzene	ND		52.1	76.1	M1	mg/kg wet		146	31 - 143
Ethylbenzene	ND		52.1	70.9		mg/kg wet		136	23 - 161
Naphthalene	ND		52.1	95.0	M1	mg/kg wet		182	10 - 176
Toluene	ND		52.1	72.6		mg/kg wet		139	30 - 155
Xylenes, total	ND		156	216		mg/kg wet		138	25 - 162

Surrogate	Matrix Spike % Recovery	Matrix Spike Qualifier	Limits
1,2-Dichloroethane-d4	100		70 - 130
Dibromofluoromethane	101		70 - 130
Toluene-d8	100		70 - 130
4-Bromofluorobenzene	84		70 - 130

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B (Continued)

Lab Sample ID: 11I6327-MSD1

Matrix: Soil

Analysis Batch: U017446

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total

Prep Batch: 11I6327_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Dup Result	Matrix Spike Dup Qualifier	Matrix Spike Dup Unit	D	% Rec	% Rec. Limits	RPD	RPD Limit
Benzene	ND		52.1	92.6	M1	mg/kg wet		178	31 - 143	20	50
Ethylbenzene	ND		52.1	86.6	M1	mg/kg wet		166	23 - 161	20	50
Naphthalene	ND		52.1	105	M1	mg/kg wet		201	10 - 176	10	50
Toluene	ND		52.1	88.3	M1	mg/kg wet		170	30 - 155	20	50
Xylenes, total	ND		156	262	M1	mg/kg wet		168	25 - 162	19	50

Surrogate	Matrix Spike Dup % Recovery	Matrix Spike Dup Qualifier	Matrix Spike Dup Limits
1,2-Dichloroethane-d4	97		70 - 130
Dibromofluoromethane	101		70 - 130
Toluene-d8	100		70 - 130
4-Bromofluorobenzene	86		70 - 130

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Lab Sample ID: 11I5238-BLK1

Matrix: Soil

Analysis Batch: 11I5238

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 11I5238_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Acenaphthylene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Anthracene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Benzo (a) anthracene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Benzo (a) pyrene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Benzo (b) fluoranthene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Benzo (g,h,i) perylene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Benzo (k) fluoranthene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Chrysene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Dibenz (a,h) anthracene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Fluoranthene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Fluorene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Naphthalene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Phenanthrene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
Pyrene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
1-Methylnaphthalene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00
2-Methylnaphthalene	ND		0.0670	0.0340	mg/kg wet		09/27/11 07:57	09/28/11 01:19	1.00

Surrogate	Blank % Recovery	Blank Qualifier	Blank Limits	Prepared	Analyzed	Dil Fac
Terphenyl-d14	61		18 - 120	09/27/11 07:57	09/28/11 01:19	1.00
2-Fluorobiphenyl	48		14 - 120	09/27/11 07:57	09/28/11 01:19	1.00
Nitrobenzene-d5	49		17 - 120	09/27/11 07:57	09/28/11 01:19	1.00

Lab Sample ID: 11I5238-BS1

Matrix: Soil

Analysis Batch: 11I5238

Client Sample ID: Lab Control Sample

Prep Type: Total

Prep Batch: 11I5238_P

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	% Rec	% Rec. Limits
Acenaphthene	1.67	1.11		mg/kg wet		66	36 - 120

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D (Continued)

Lab Sample ID: 11I5238-BS1

Matrix: Soil

Analysis Batch: 11I5238

Client Sample ID: Lab Control Sample

Prep Type: Total

Prep Batch: 11I5238_P

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	% Rec	% Rec. Limits
Acenaphthylene	1.67	1.04		mg/kg wet		62	38 - 120
Anthracene	1.67	1.17		mg/kg wet		70	46 - 124
Benzo (a) anthracene	1.67	1.12		mg/kg wet		67	45 - 120
Benzo (a) pyrene	1.67	1.23		mg/kg wet		74	45 - 120
Benzo (b) fluoranthene	1.67	1.10		mg/kg wet		66	42 - 120
Benzo (g,h,i) perylene	1.67	1.12		mg/kg wet		67	38 - 120
Benzo (k) fluoranthene	1.67	1.27		mg/kg wet		76	42 - 120
Chrysene	1.67	1.08		mg/kg wet		65	43 - 120
Dibenz (a,h) anthracene	1.67	1.13		mg/kg wet		68	32 - 128
Fluoranthene	1.67	1.18		mg/kg wet		71	46 - 120
Fluorene	1.67	1.14		mg/kg wet		69	42 - 120
Indeno (1,2,3-cd) pyrene	1.67	1.14		mg/kg wet		68	41 - 121
Naphthalene	1.67	1.11		mg/kg wet		67	32 - 120
Phenanthrene	1.67	1.16		mg/kg wet		69	45 - 120
Pyrene	1.67	1.11		mg/kg wet		67	43 - 120
1-Methylnaphthalene	1.67	0.842		mg/kg wet		51	32 - 120
2-Methylnaphthalene	1.67	0.987		mg/kg wet		59	28 - 120

Surrogate	LCS % Recovery	LCS Qualifier	Limits
Terphenyl-d14	69		18 - 120
2-Fluorobiphenyl	57		14 - 120
Nitrobenzene-d5	52		17 - 120

Lab Sample ID: 11I5238-MS1

Matrix: Soil

Analysis Batch: 11I5238

Client Sample ID: Matrix Spike

Prep Type: Total

Prep Batch: 11I5238_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Result	Matrix Spike Qualifier	Unit	D	% Rec	% Rec. Limits
Acenaphthene	0.0756		1.94	1.25		mg/kg dry	☼	60	19 - 120
Acenaphthylene	0.0853		1.94	1.17		mg/kg dry	☼	56	25 - 120
Anthracene	0.180		1.94	1.33		mg/kg dry	☼	59	28 - 125
Benzo (a) anthracene	0.611		1.94	1.63		mg/kg dry	☼	52	23 - 120
Benzo (a) pyrene	0.691		1.94	1.91		mg/kg dry	☼	63	15 - 128
Benzo (b) fluoranthene	0.637		1.94	1.76		mg/kg dry	☼	58	12 - 133
Benzo (g,h,i) perylene	0.558		1.94	1.55		mg/kg dry	☼	51	22 - 120
Benzo (k) fluoranthene	0.604		1.94	1.91		mg/kg dry	☼	67	28 - 120
Chrysene	0.626		1.94	1.71		mg/kg dry	☼	56	20 - 120
Dibenz (a,h) anthracene	0.162		1.94	1.30		mg/kg dry	☼	59	12 - 128
Fluoranthene	1.32		1.94	2.69		mg/kg dry	☼	70	10 - 143
Fluorene	0.0787		1.94	1.27		mg/kg dry	☼	61	20 - 120
Indeno (1,2,3-cd) pyrene	0.434		1.94	1.49		mg/kg dry	☼	54	22 - 121
Naphthalene	0.145		1.94	1.34		mg/kg dry	☼	61	10 - 120
Phenanthrene	0.897		1.94	2.26		mg/kg dry	☼	70	21 - 122
Pyrene	1.14		1.94	2.29		mg/kg dry	☼	59	20 - 123
1-Methylnaphthalene	ND		1.94	0.972		mg/kg dry	☼	50	10 - 120
2-Methylnaphthalene	0.0522		1.94	1.14		mg/kg dry	☼	56	13 - 120

Surrogate	Matrix Spike % Recovery	Matrix Spike Qualifier	Limits
Terphenyl-d14	59		18 - 120

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D (Continued)

Lab Sample ID: 11I5238-MS1

Matrix: Soil

Analysis Batch: 11I5238

Client Sample ID: Matrix Spike

Prep Type: Total

Prep Batch: 11I5238_P

Surrogate	Matrix Spike % Recovery	Matrix Spike Qualifier	Limits
2-Fluorobiphenyl	49		14 - 120
Nitrobenzene-d5	48		17 - 120

Lab Sample ID: 11I5238-MSD1

Matrix: Soil

Analysis Batch: 11I5238

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total

Prep Batch: 11I5238_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Dup Result	Matrix Spike Dup Qualifier	Unit	D	% Rec	% Rec. Limits	RPD	RPD Limit
Acenaphthene	0.0756		1.94	1.28		mg/kg dry	☼	62	19 - 120	3	50
Acenaphthylene	0.0853		1.94	1.15		mg/kg dry	☼	55	25 - 120	1	50
Anthracene	0.180		1.94	1.39		mg/kg dry	☼	62	28 - 125	4	49
Benzo (a) anthracene	0.611		1.94	1.99		mg/kg dry	☼	71	23 - 120	20	50
Benzo (a) pyrene	0.691		1.94	2.31		mg/kg dry	☼	83	15 - 128	19	50
Benzo (b) fluoranthene	0.637		1.94	2.15		mg/kg dry	☼	78	12 - 133	20	50
Benzo (g,h,i) perylene	0.558		1.94	1.82		mg/kg dry	☼	65	22 - 120	16	50
Benzo (k) fluoranthene	0.604		1.94	2.21		mg/kg dry	☼	83	28 - 120	15	45
Chrysene	0.626		1.94	2.08		mg/kg dry	☼	75	20 - 120	20	49
Dibenz (a,h) anthracene	0.162		1.94	1.38		mg/kg dry	☼	63	12 - 128	6	50
Fluoranthene	1.32		1.94	3.45		mg/kg dry	☼	109	10 - 143	25	50
Fluorene	0.0787		1.94	1.31		mg/kg dry	☼	63	20 - 120	3	50
Indeno (1,2,3-cd) pyrene	0.434		1.94	1.72		mg/kg dry	☼	66	22 - 121	14	50
Naphthalene	0.145		1.94	1.42		mg/kg dry	☼	66	10 - 120	6	50
Phenanthrene	0.897		1.94	2.87		mg/kg dry	☼	102	21 - 122	24	50
Pyrene	1.14		1.94	2.98		mg/kg dry	☼	95	20 - 123	26	50
1-Methylnaphthalene	ND		1.94	0.928		mg/kg dry	☼	48	10 - 120	5	50
2-Methylnaphthalene	0.0522		1.94	1.12		mg/kg dry	☼	55	13 - 120	1	50

Surrogate	Matrix Spike Dup % Recovery	Matrix Spike Dup Qualifier	Limits
Terphenyl-d14	59		18 - 120
2-Fluorobiphenyl	49		14 - 120
Nitrobenzene-d5	47		17 - 120

Method: SW-846 - General Chemistry Parameters

Lab Sample ID: 11I5650-DUP1

Matrix: Soil

Analysis Batch: 11I5650

Client Sample ID: Duplicate

Prep Type: Total

Prep Batch: 11I5650_P

Analyte	Sample Result	Sample Qualifier	Duplicate Result	Duplicate Qualifier	Unit	D	RPD	RPD Limit
% Dry Solids	81.7		81.9		%		0.2	20

QC Association Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

GCMS Volatiles

Analysis Batch: U017358

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I5281-BLK1	Method Blank	Total	Soil	SW846 8260B	11I5281_P
11I5281-BLK2	Method Blank	Total	Soil	SW846 8260B	11I5281_P
11I5281-BS1	Lab Control Sample	Total	Soil	SW846 8260B	11I5281_P
11I5281-MS1	Matrix Spike	Total	Soil	SW846 8260B	11I5281_P
11I5281-MSD1	Matrix Spike Duplicate	Total	Soil	SW846 8260B	11I5281_P
NUI3262-01	159 Cypress-1	Total	Soil	SW846 8260B	11I5281_P
NUI3262-03	400 Elderberry	Total	Soil	SW846 8260B	11I5281_P
NUI3262-04	141 Laurel Bay-a	Total	Soil	SW846 8260B	11I5281_P
NUI3262-05	153 Laurel Bay-a	Total	Soil	SW846 8260B	11I5281_P
NUI3262-06	155 Laurel Bay-a	Total	Soil	SW846 8260B	11I5281_P

Analysis Batch: U017446

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I6327-BLK1	Method Blank	Total	Soil	SW846 8260B	11I6327_P
11I6327-BLK2	Method Blank	Total	Soil	SW846 8260B	11I6327_P
11I6327-BS1	Lab Control Sample	Total	Soil	SW846 8260B	11I6327_P
11I6327-MS1	Matrix Spike	Total	Soil	SW846 8260B	11I6327_P
11I6327-MSD1	Matrix Spike Duplicate	Total	Soil	SW846 8260B	11I6327_P
NUI3262-02 - RE1	159 Cypress-2	Total	Soil	SW846 8260B	11I6327_P
NUI3262-02 - RE2	159 Cypress-2	Total	Soil	SW846 8260B	11I6327_P
NUI3262-04 - RE1	141 Laurel Bay-a	Total	Soil	SW846 8260B	11I6327_P

Prep Batch: 11I5281_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I5281-BLK1	Method Blank	Total	Soil	EPA 5035	
11I5281-BLK2	Method Blank	Total	Soil	EPA 5035	
11I5281-BS1	Lab Control Sample	Total	Soil	EPA 5035	
11I5281-MS1	Matrix Spike	Total	Soil	EPA 5035	
11I5281-MSD1	Matrix Spike Duplicate	Total	Soil	EPA 5035	
NUI3262-01	159 Cypress-1	Total	Soil	EPA 5035	
NUI3262-03	400 Elderberry	Total	Soil	EPA 5035	
NUI3262-04	141 Laurel Bay-a	Total	Soil	EPA 5035	
NUI3262-05	153 Laurel Bay-a	Total	Soil	EPA 5035	
NUI3262-06	155 Laurel Bay-a	Total	Soil	EPA 5035	

Prep Batch: 11I6327_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I6327-BLK1	Method Blank	Total	Soil	EPA 5035	
11I6327-BLK2	Method Blank	Total	Soil	EPA 5035	
11I6327-BS1	Lab Control Sample	Total	Soil	EPA 5035	
11I6327-MS1	Matrix Spike	Total	Soil	EPA 5035	
11I6327-MSD1	Matrix Spike Duplicate	Total	Soil	EPA 5035	
NUI3262-02 - RE1	159 Cypress-2	Total	Soil	EPA 5035	
NUI3262-02 - RE2	159 Cypress-2	Total	Soil	EPA 5035	
NUI3262-04 - RE1	141 Laurel Bay-a	Total	Soil	EPA 5035	

GCMS Semivolatiles

Analysis Batch: 11I5238

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I5238-BLK1	Method Blank	Total	Soil	SW846 8270D	11I5238_P
11I5238-BS1	Lab Control Sample	Total	Soil	SW846 8270D	11I5238_P

QC Association Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

GCMS Semivolatiles (Continued)

Analysis Batch: 11I5238 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I5238-MS1	Matrix Spike	Total	Soil	SW846 8270D	11I5238_P
11I5238-MSD1	Matrix Spike Duplicate	Total	Soil	SW846 8270D	11I5238_P
NUI3262-01	159 Cypress-1	Total	Soil	SW846 8270D	11I5238_P
NUI3262-02	159 Cypress-2	Total	Soil	SW846 8270D	11I5238_P
NUI3262-03	400 Elderberry	Total	Soil	SW846 8270D	11I5238_P
NUI3262-04	141 Laurel Bay-a	Total	Soil	SW846 8270D	11I5238_P
NUI3262-05	153 Laurel Bay-a	Total	Soil	SW846 8270D	11I5238_P
NUI3262-06	155 Laurel Bay-a	Total	Soil	SW846 8270D	11I5238_P

Prep Batch: 11I5238_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I5238-BLK1	Method Blank	Total	Soil	EPA 3550B	
11I5238-BS1	Lab Control Sample	Total	Soil	EPA 3550B	
11I5238-MS1	Matrix Spike	Total	Soil	EPA 3550B	
11I5238-MSD1	Matrix Spike Duplicate	Total	Soil	EPA 3550B	
NUI3262-01	159 Cypress-1	Total	Soil	EPA 3550B	
NUI3262-02	159 Cypress-2	Total	Soil	EPA 3550B	
NUI3262-03	400 Elderberry	Total	Soil	EPA 3550B	
NUI3262-04	141 Laurel Bay-a	Total	Soil	EPA 3550B	
NUI3262-05	153 Laurel Bay-a	Total	Soil	EPA 3550B	
NUI3262-06	155 Laurel Bay-a	Total	Soil	EPA 3550B	

Extractions

Analysis Batch: 11I5650

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I5650-DUP1	Duplicate	Total	Soil	SW-846	11I5650_P
NUI3262-01	159 Cypress-1	Total	Soil	SW-846	11I5650_P
NUI3262-02	159 Cypress-2	Total	Soil	SW-846	11I5650_P
NUI3262-03	400 Elderberry	Total	Soil	SW-846	11I5650_P
NUI3262-04	141 Laurel Bay-a	Total	Soil	SW-846	11I5650_P
NUI3262-05	153 Laurel Bay-a	Total	Soil	SW-846	11I5650_P
NUI3262-06	155 Laurel Bay-a	Total	Soil	SW-846	11I5650_P

Prep Batch: 11I5650_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
11I5650-DUP1	Duplicate	Total	Soil	% Solids	
NUI3262-01	159 Cypress-1	Total	Soil	% Solids	
NUI3262-02	159 Cypress-2	Total	Soil	% Solids	
NUI3262-03	400 Elderberry	Total	Soil	% Solids	
NUI3262-04	141 Laurel Bay-a	Total	Soil	% Solids	
NUI3262-05	153 Laurel Bay-a	Total	Soil	% Solids	
NUI3262-06	155 Laurel Bay-a	Total	Soil	% Solids	

Lab Chronicle

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Client Sample ID: 159 Cypress-1

Date Collected: 09/19/11 13:00

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-01

Matrix: Soil

Percent Solids: 83.5

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared Or Analyzed	Analyst	Lab
Total	Prep	EPA 5035		0.785	11I5281_P	09/19/11 13:00	TSP	TAL NSH
Total	Analysis	SW846 8260B		1.00	U017358	09/28/11 14:02	KKK H	TAL NSH
Total	Prep	EPA 3550B		0.994	11I5238_P	09/27/11 07:57	JJR	TAL NSH
Total	Analysis	SW846 8270D		1.00	11I5238	09/28/11 04:06	KJP	TAL NSH
Total	Prep	% Solids		1.00	11I5650_P	09/28/11 10:28	RRS	TAL NSH
Total	Analysis	SW-846		1.00	11I5650	09/29/11 11:06	RRS	TAL NSH

Client Sample ID: 159 Cypress-2

Date Collected: 09/20/11 11:15

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-02

Matrix: Soil

Percent Solids: 95.9

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared Or Analyzed	Analyst	Lab
Total	Prep	EPA 5035	RE1	1.07	11I6327_P	09/20/11 11:15	TSP	TAL NSH
Total	Analysis	SW846 8260B	RE1	1.00	U017446	09/30/11 14:18	KKK H	TAL NSH
Total	Prep	EPA 5035	RE2	1.24	11I6327_P	09/20/11 11:15	TSP	TAL NSH
Total	Analysis	SW846 8260B	RE2	50.0	U017446	09/30/11 14:49	KKK H	TAL NSH
Total	Prep	EPA 3550B		0.980	11I5238_P	09/27/11 07:57	JJR	TAL NSH
Total	Analysis	SW846 8270D		1.00	11I5238	09/28/11 04:27	KJP	TAL NSH
Total	Prep	% Solids		1.00	11I5650_P	09/28/11 10:28	RRS	TAL NSH
Total	Analysis	SW-846		1.00	11I5650	09/29/11 11:06	RRS	TAL NSH

Client Sample ID: 400 Elderberry

Date Collected: 09/21/11 13:45

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-03

Matrix: Soil

Percent Solids: 82.7

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared Or Analyzed	Analyst	Lab
Total	Prep	EPA 5035		1.01	11I5281_P	09/21/11 13:45	TSP	TAL NSH
Total	Analysis	SW846 8260B		1.00	U017358	09/28/11 15:04	KKK H	TAL NSH
Total	Prep	EPA 3550B		0.972	11I5238_P	09/27/11 07:57	JJR	TAL NSH
Total	Analysis	SW846 8270D		1.00	11I5238	09/28/11 04:47	KJP	TAL NSH
Total	Prep	% Solids		1.00	11I5650_P	09/28/11 10:28	RRS	TAL NSH
Total	Analysis	SW-846		1.00	11I5650	09/29/11 11:06	RRS	TAL NSH

Client Sample ID: 141 Laurel Bay-a

Date Collected: 09/22/11 09:15

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-04

Matrix: Soil

Percent Solids: 77.6

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared Or Analyzed	Analyst	Lab
Total	Prep	EPA 5035		0.755	11I5281_P	09/22/11 09:15	TSP	TAL NSH
Total	Analysis	SW846 8260B		1.00	U017358	09/28/11 15:36	KKK H	TAL NSH
Total	Prep	EPA 5035	RE1	0.762	11I6327_P	09/22/11 09:15	TSP	TAL NSH
Total	Analysis	SW846 8260B	RE1	50.0	U017446	09/30/11 17:56	KKK H	TAL NSH
Total	Prep	EPA 3550B		0.991	11I5238_P	09/27/11 07:57	JJR	TAL NSH
Total	Analysis	SW846 8270D		1.00	11I5238	09/28/11 05:08	KJP	TAL NSH

Lab Chronicle

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Client Sample ID: 141 Laurel Bay-a

Date Collected: 09/22/11 09:15

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-04

Matrix: Soil

Percent Solids: 77.6

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared Or Analyzed	Analyst	Lab
Total	Prep	% Solids		1.00	11I5650_P	09/28/11 10:28	RRS	TAL NSH
Total	Analysis	SW-846		1.00	11I5650	09/29/11 11:06	RRS	TAL NSH

Client Sample ID: 153 Laurel Bay-a

Date Collected: 09/22/11 09:45

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-05

Matrix: Soil

Percent Solids: 77.9

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared Or Analyzed	Analyst	Lab
Total	Prep	EPA 5035		0.867	11I5281_P	09/22/11 09:45	TSP	TAL NSH
Total	Analysis	SW846 8260B		1.00	U017358	09/28/11 16:07	KKK H	TAL NSH
Total	Prep	EPA 3550B		0.985	11I5238_P	09/27/11 07:57	JJR	TAL NSH
Total	Analysis	SW846 8270D		1.00	11I5238	09/28/11 05:30	KJP	TAL NSH
Total	Prep	% Solids		1.00	11I5650_P	09/28/11 10:28	RRS	TAL NSH
Total	Analysis	SW-846		1.00	11I5650	09/29/11 11:06	RRS	TAL NSH

Client Sample ID: 155 Laurel Bay-a

Date Collected: 09/22/11 10:45

Date Received: 09/24/11 09:00

Lab Sample ID: NUI3262-06

Matrix: Soil

Percent Solids: 88.1

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared Or Analyzed	Analyst	Lab
Total	Prep	EPA 5035		1.17	11I5281_P	09/22/11 10:45	TSP	TAL NSH
Total	Analysis	SW846 8260B		1.00	U017358	09/28/11 16:38	KKK H	TAL NSH
Total	Prep	EPA 3550B		0.987	11I5238_P	09/27/11 07:57	JJR	TAL NSH
Total	Analysis	SW846 8270D		1.00	11I5238	09/28/11 05:50	KJP	TAL NSH
Total	Prep	% Solids		1.00	11I5650_P	09/28/11 10:28	RRS	TAL NSH
Total	Analysis	SW-846		1.00	11I5650	09/29/11 11:06	RRS	TAL NSH

Laboratory References:

TAL NSH = TestAmerica Nashville, 2960 Foster Creighton Road, Nashville, TN 37204, TEL 800-765-0980

Method Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Method	Method Description	Protocol	Laboratory
SW-846	General Chemistry Parameters		TAL NSH
SW846 8260B	Volatile Organic Compounds by EPA Method 8260B		TAL NSH
SW846 8270D	Polyaromatic Hydrocarbons by EPA 8270D		TAL NSH

Protocol References:

Laboratory References:

TAL NSH = TestAmerica Nashville, 2960 Foster Creighton Road, Nashville, TN 37204, TEL 800-765-0980

Certification Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NUI3262

Laboratory	Authority	Program	EPA Region	Certification ID
TestAmerica Nashville	A2LA	ISO/IEC 17025		0453.07
TestAmerica Nashville	A2LA	WY UST		453.07
TestAmerica Nashville	AIHA	IHLAP		100790
TestAmerica Nashville	Alabama	State Program	4	41150
TestAmerica Nashville	Alaska	Alaska UST	10	UST-087
TestAmerica Nashville	Arizona	State Program	9	AZ0473
TestAmerica Nashville	Arkansas	State Program	6	88-0737
TestAmerica Nashville	CALA	CALA		3744
TestAmerica Nashville	California	NELAC	9	1168CA
TestAmerica Nashville	Colorado	State Program	8	N/A
TestAmerica Nashville	Connecticut	State Program	1	PH-0220
TestAmerica Nashville	Florida	NELAC	4	E87358
TestAmerica Nashville	Illinois	NELAC	5	200010
TestAmerica Nashville	Iowa	State Program	7	131
TestAmerica Nashville	Kansas	NELAC	7	E-10229
TestAmerica Nashville	Kentucky	Kentucky UST	4	19
TestAmerica Nashville	Kentucky	State Program	4	90038
TestAmerica Nashville	Louisiana	NELAC	6	LA100011
TestAmerica Nashville	Louisiana	NELAC	6	30613
TestAmerica Nashville	Maryland	State Program	3	316
TestAmerica Nashville	Massachusetts	State Program	1	M-TN032
TestAmerica Nashville	Minnesota	NELAC	5	047-999-345
TestAmerica Nashville	Mississippi	State Program	4	N/A
TestAmerica Nashville	Montana	MT DEQ UST	8	NA
TestAmerica Nashville	New Jersey	NELAC	2	TN965
TestAmerica Nashville	New York	NELAC	2	11342
TestAmerica Nashville	North Carolina	North Carolina DENR	4	387
TestAmerica Nashville	North Dakota	State Program	8	R-146
TestAmerica Nashville	Ohio	OVAP	5	CL0033
TestAmerica Nashville	Oklahoma	State Program	6	9412
TestAmerica Nashville	Oregon	NELAC	10	TN200001
TestAmerica Nashville	Pennsylvania	NELAC	3	68-00585
TestAmerica Nashville	Rhode Island	State Program	1	LAO00268
TestAmerica Nashville	South Carolina	State Program	4	84009
TestAmerica Nashville	South Carolina	State Program	4	84009
TestAmerica Nashville	Tennessee	State Program	4	2008
TestAmerica Nashville	Texas	NELAC	6	T104704077-09-TX
TestAmerica Nashville	USDA	USDA		S-48469
TestAmerica Nashville	Utah	NELAC	8	TAN
TestAmerica Nashville	Virginia	NELAC Secondary AB	3	460152
TestAmerica Nashville	Virginia	State Program	3	00323
TestAmerica Nashville	Washington	State Program	10	C789
TestAmerica Nashville	West Virginia	West Virginia DEP	3	219

Accreditation may not be offered or required for all methods and analytes reported in this package. Please contact your project manager for the laboratory's current list of certified methods and analytes.

TestAmerica

Nashville Division
2960 Foster Creighton
Nashville, TN 37204

Client Name/Account #: EEG - SBG # 2449

Address: 10179 Highway 78

City/State/Zip: Ladson, SC 29456

Project Manager: Tom McElwee email: tom@testamerica.com

Telephone Number: 843.412.2097

Sampler Name: (Print)

Sampler Signature:

Phone 843.215.0170
Toll Free 800.333.3333
Fax 843.215.0066

Fax No: 343-879-0401

1027

NUI3262

10/10/11 23:59

Methanol

Sample ID: Description

1	159 Cypress - 1	9/19/11	1300	5	X
2	159 Cypress - 2	9/20/11	1115	5	X
3	400 Elderberry	9/21/11	1345	5	X
4	141 Laurel Bay - a	9/22/11	0915	5	X
5	153 Laurel Bay - a	9/22/11	0945	5	X
6	155 Laurel Bay - a	9/22/11	1045	5	X

2	1	X	X	X	X
2	1	X	X	X	X
2	1	X	X	X	X
2	1	X	X	X	X
2	1	X	X	X	X
2	1	X	X	X	X

Serial Instructions:

Returned by	Date	Time	Method of Shipment
<i>[Signature]</i>	9/23/11	1000	Fedex
Received by	Date	Time	Received by
			<i>[Signature]</i>

9/24/11 0900

ATTACHMENT A



NON-HAZARDOUS MANIFEST

NON-HAZARDOUS MANIFEST		1. Generator's US EPA ID No.		Manifest Doc No.		2. Page 1 of 1	
3. Generator's Mailing Address: MCAS, BEAUFORT LAUREL BAY HOUSING BEAUFORT, SC 29907		4. Generator's Phone 843-228-6461		Generator's Site Address (if different than mailing):		A. Manifest Number WMNA 00316817	
5. Transporter 1 Company Name EEG, INC.		6. US EPA ID Number		C. State Transporter's ID		D. Transporter's Phone 843-879-0411	
7. Transporter 2 Company Name		8. US EPA ID Number		E. State Transporter's ID		F. Transporter's Phone	
9. Designated Facility Name and Site Address HICKORY HILL LANDFILL 2621 LOW COUNTRY ROAD RIDGELAND, SC 29936		10. US EPA ID Number		G. State Facility ID		H. State Facility Phone 843-987-4643	
11. Description of Waste Materials		12. Containers		13. Total Quantity	14. Unit Wt./Vol.	I. Misc. Comments	
		No.	Type				
		a. HEATING OIL TANKS FILLED WITH SAND WM Profile # 102655SC					
		b. WM Profile #					
		c. WM Profile #					
d. WM Profile #							
J. Additional Descriptions for Materials Listed Above		K. Disposal Location					
		Cell		Level			
		Grid					
15. Special Handling Instructions and Additional Information 1) 134 BANYAN 2) 154 Laurel Bay 3) 153 Laurel Bay 4) 155 Laurel Bay 5) 141 Laurel Bay 6) 151 Laurel Bay 7) 159 Cypress-2							
Purchase Order #				EMERGENCY CONTACT / PHONE NO.:			
16. GENERATOR'S CERTIFICATE: I hereby certify that the above-described materials are not hazardous wastes as defined by CFR Part 261 or any applicable state law, have been fully and accurately described, classified and packaged and are in proper condition for transportation according to applicable regulations.							
Printed Name W.C. Duke, Jr.		Signature "On behalf of"				Month Day Year 09 21 11	
17. Transporter 1 Acknowledgement of Receipt of Materials		Printed Name James BALDWIN				Signature James Baldwin	
						Month Day Year 09 22 11	
18. Transporter 2 Acknowledgement of Receipt of Materials		Printed Name				Signature	
						Month Day Year	
19. Certificate of Final Treatment/Disposal I certify, on behalf of the above listed treatment facility, that to the best of my knowledge, the above-described waste was managed in compliance with all applicable laws, regulations, permits and licenses on the dates listed above.							
20. Facility Owner or Operator: Certification of receipt of non-hazardous materials covered by this manifest.							
Printed Name Tom Cofield		Signature Tom Cofield				Month Day Year 9 22 11	

White- TREATMENT, STORAGE, DISPOSAL FACILITY COPY

Blue- GENERATOR #2 COPY

Yellow- GENERATOR #1 COPY

Pink- FACILITY USE ONLY

Gold- TRANSPORTER #1 COPY

Appendix C
Laboratory Analytical Report - Groundwater

Volatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants				Laboratory ID: QK05015-010			
Description: BEALB141TW01WG20151105				Matrix: Aqueous			
Date Sampled: 11/05/2015 1425							
Date Received: 11/06/2015							

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	5030B	8260B	1	11/11/2015 1419	ALL		89321

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	LOD	DL	Units	Run
Benzene	71-43-2	8260B	0.45	U	5.0	0.45	0.21	ug/L	1
Ethylbenzene	100-41-4	8260B	0.22	J	5.0	0.51	0.21	ug/L	1
Naphthalene	91-20-3	8260B	2.2	J	5.0	0.96	0.14	ug/L	1
Toluene	108-88-3	8260B	0.48	U	5.0	0.48	0.24	ug/L	1
Xylenes (total)	1330-20-7	8260B	0.57	U	5.0	0.57	0.32	ug/L	1

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
Bromofluorobenzene		92	75-120
1,2-Dichloroethane-d4		96	70-120
Toluene-d8		95	85-120
Dibromofluoromethane		98	85-115

PQL = Practical quantitation limit B = Detected in the method blank E = Quantitation of compound exceeded the calibration range H = Out of holding time Q = Surrogate failure
 ND = Not detected at or above the MDL J = Estimated result < PQL and ≥ MDL P = The RPD between two GC columns exceeds 40% N = Recovery is out of criteria L = LCS/LCSD failure
 Where applicable, all soil sample analysis are reported on a dry weight basis unless flagged with a "W" S = MS/MSD failure

Shealy Environmental Services, Inc.
 106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.shealylab.com

Semivolatile Organic Compounds by GC/MS (SIM)

Client: AECOM - Resolution Consultants	Laboratory ID: QK05015-010
Description: BEALB141TW01WG20151105	Matrix: Aqueous
Date Sampled: 11/05/2015 1425	
Date Received: 11/06/2015	

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	3520C	8270D (SIM)	1	11/17/2015 1931	RBH	11/10/2015 1444	89221

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	LOD	DL	Units	Run
Benzo(a)anthracene	56-55-3	8270D (SIM)	0.040	U	0.20	0.040	0.019	ug/L	1
Benzo(b)fluoranthene	205-99-2	8270D (SIM)	0.040	U	0.20	0.040	0.019	ug/L	1
Benzo(k)fluoranthene	207-08-9	8270D (SIM)	0.040	U	0.20	0.040	0.024	ug/L	1
Chrysene	218-01-9	8270D (SIM)	0.040	U	0.20	0.040	0.021	ug/L	1
Dibenzo(a,h)anthracene	53-70-3	8270D (SIM)	0.080	U	0.20	0.080	0.040	ug/L	1

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
2-Methylnaphthalene-d10		67	15-139
Fluoranthene-d10		80	23-154

PQL = Practical quantitation limit B = Detected in the method blank E = Quantitation of compound exceeded the calibration range H = Out of holding time Q = Surrogate failure
 ND = Not detected at or above the MDL J = Estimated result < PQL and ≥ MDL P = The RPD between two GC columns exceeds 40% N = Recovery is out of criteria L = LCS/LCSD failure
 Where applicable, all soil sample analysis are reported on a dry weight basis unless flagged with a "W" S = MS/MSD failure

Shealy Environmental Services, Inc.
 106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.shealylab.com

Appendix D

Regulatory Correspondence



Catherine E. Heigel, Director

Promoting and protecting the health of the public and the environment

July 1, 2015

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United State Marine Corps Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: IGWA
Laurel Bay Underground Storage Tank Assessment Reports for:
See attached sheet

Dear Mr. Drawdy,

The South Carolina Department of Health and Environmental Control (the Department) received the referenced Underground Storage Tank Assessment Reports for the addresses listed above. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

The Department has reviewed the referenced assessment reports. The submitted analytical results indicate that petroleum constituents are above established Risk-Based Screening Levels and additional investigation is warranted. Specifically, the Department requests that a groundwater sampling proposal be generated to determine if there has been an impact to groundwater at this site.

Please note that the Department's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary.

If you have any questions, please contact me at kriegkm@dhec.sc.gov or 803-898-0255.

Sincerely,

Kent Krieg
Department of Defense Corrective Action Section
Bureau of Land and Waste Management
South Carolina Department of Health and Environmental Control

Cc: Russell Berry (via email)
Craig Ehde (via email)
Bryan Beck (via email)



Catherine E. Heigel, Director

Promoting and protecting the health of the public and the environment

Attachment to: Krieg to Drawdy
Subject: IGWA
Dated 7/1/2015

Laurel Bay Underground Storage Tank Assessment Reports for: (97 addresses/110 tanks)

118 Banyan	343 Ash Tank 2
126 Banyan	344 Ash Tank 2
127 Banyan	347 Ash Tank 2
130 Banyan Tank 1	378 Aspen Tank 2
141 Laurel Bay	379 Aspen
151 Laurel Bay	382 Aspen Tank 1
224 Cypress	382 Aspen Tank 2
227 Cypress	394 Acorn Tank 2
256 Beech Tank 2	400 Elderberry
257 Beech Tank 1	432 Elderberry
257 Beech Tank 2	436 Elderberry
264 Beech	473 Dogwood Tank 2
265 Beech Tank 2	482 Laurel Bay
265 Beech Tank 3	517 Laurel Bay
275 Birch	586 Aster
277 Birch Tank 1	632 Dahlia
285 Birch	639 Dahlia Tank 2
292 Birch Tank 3	643 Dahlia Tank 1
297 Birch	644 Dahlia Tank 1
301 Ash	644 Dahlia Tank 2
306 Ash	646 Dahlia Tank 1
310 Ash Tank 1	646 Dahlia Tank 2
313 Ash	665 Camellia
315 Ash Tank 2	699 Abelia
316 Ash	744 Blue Bell
319 Ash	745 Blue Bell Tank 1
320 Ash	747 Blue Bell Tank 1
321 Ash	747 Blue Bell Tank 2
329 Ash	747 Blue Bell Tank 3
330 Ash Tank 2	749 Blue Bell Tank 1
331 Ash	749 Blue Bell Tank 2
332 Ash	751 Blue Bell
333 Ash	762 Althea
335 Ash Tank 1	765 Althea Tank 2
335 Ash Tank 2	766 Althea Tank 4
341 Ash	767 Althea Tank 1
342 Ash Tank 1	768 Althea Tank 2
342 Ash Tank 2	768 Althea Tank 3

Laurel Bay Underground Storage Tank Assessment Reports for: (98 addresses/110 tanks) cont.

768 Althea Tank 4	1067 Gardenia
769 Althea Tank 1	1077 Heather
769 Althea Tank 2	1081 Heather
775 Althea	1101 Iris Tank 2
819 Azalea	1104 Iris
840 Azalea	1105 Iris Tank 2
878 Cobia	1124 Iris Tank 2
891 Cobia	1142 Iris Tank 2
913 Barracuda	1146 Iris Tank 2
916 Barracuda	1218 Cardinal
923 Albacore	1240 Dove
1004 Bobwhite	1266 Dove
1022 Foxglove	1292 Eagle
1031 Foxglove	1299 Eagle Tank 1
1034 Foxglove Tank 2	1302 Eagle
1061 Gardenia Tank 3	1336 Albatross
1064 Gardenia	1351 Cardinal



Catherine E. Heigel, Director

Promoting and protecting the health of the public and the environment

Division of Waste Management
Bureau of Land and Waste Management

June 8, 2016

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United State Marine Corps Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: Approval and Concurrence with Draft Final Initial Groundwater Investigation Report-November and December 2015
Laurel Bay Military Housing Area Multiple Properties
Dated April 2015

Dear Mr. Drawdy,

The South Carolina Department of Health and Environmental Control (the Department) received groundwater data in the above referenced Groundwater Investigation Report for the attached addresses on May 2, 2016. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

Per the Department's request, groundwater samples were collected from the attached referenced addresses. The Department reviewed the groundwater data and previous investigations and it agrees with the conclusions and recommendations included in the document. To further assess the impact to groundwater, permanent wells should be installed at the 15 stated addresses. For the remaining 80 addresses, there is no indication of contamination on the property and therefore no further investigation is required at this time.

Please note that the Department's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary.

If you have any questions, please contact me at petruslb@dhec.sc.gov or 803-898-0294.

Sincerely,

Laurel Petrus
RCRA Federal Facilities Section

Attachment: Specific Property Recommendations

Cc: Russell Berry, EQC Region 8 (via email)
Shawn Dolan, Resolution Consultants (via email)
Bryan Beck, NAVFAC MIDATLANTIC (via email)
Craig Ehde (via email)

Attachment to: Petrus to Drawdy

Subject: Draft Final Initial Groundwater Investigation Report-November and December 2015

Specific Property Recommendations

Dated June 8, 2016

Draft Final Initial Groundwater Investigation Report for (95 addresses)

Permanent Monitoring Well Investigation recommendation (15 addresses)

130 Banyan Drive	473 Dogwood Drive
256 Beech Street	747 Blue Bell Lane
285 Birch Drive	749 Blue Bell Lane
292 Birch Drive	775 Althea Street
330 Ash Street	1034 Foxglove Street
331 Ash Street	1104 Iris Lane
335 Ash Street	1124 Iris Lane
342 Ash Street	

No Further Action recommendation (80 addresses)

118 Banyan Drive	644 Dahlia Drive
126 Banyan Drive	646 Dahlia Drive
127 Banyan Drive	665 Camellia Drive
141 Laurel Bay Blvd	699 Abelia Street
151 Laurel Bay Blvd	744 Blue Bell Lane
224 Cypress Street	745 Blue Bell Lane
227 Cypress Street	751 Blue Bell Lane
257 Beech Street	762 Althea Street
264 Beech Street	765 Althea Street
265 Beech Street	766 Althea Street
275 Birch Drive	767 Althea Street
277 Birch Drive	768 Althea Street
297 Birch Drive	769 Althea Street
301 Ash Street	819 Azalea Drive
306 Ash Street	840 Azalea Drive
310 Ash Street	878 Cobia Drive
313 Ash Street	891 Cobia Drive
315 Ash Street	913 Barracuda Drive
316 Ash Street	916 Barracuda Drive
319 Ash Street	923 Wren Lane
320 Ash Street	1004 Bobwhite Drive
321 Ash Street	1022 Foxglove Street
329 Ash Street	1031 Foxglove Street
332 Ash Street	1061 Gardenia Drive
333 Ash Street	1064 Gardenia Drive
341 Ash Street	1067 Gardenia Drive
347 Ash Street	1077 Heather Street
378 Aspen Street	1081 Heather Street
379 Aspen Street	1101 Iris Lane
382 Aspen Street	1105 Iris Lane
394 Acorn Street	1142 Iris Lane
400 Elderberry Drive	1146 Iris Lane
432 Elderberry Drive	1218 Cardinal Lane
436 Elderberry Drive	1240 Dove Lane
482 Laurel Bay Blvd	1266 Dove Lane
517 Laurel Bay Blvd	1292 Eagle Lane
586 Aster Street	1299 Eagle Lane
632 Dahlia Drive	1302 Eagle Lane
639 Dahlia Drive	1336 Albatross Drive
643 Dahlia Drive	1351 Cardinal Lane