SUMMARY REPORT
48 WEST DOVE LANE (FORMERLY 1229 WEST DOVE LANE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0 Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid-Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic 9324 Virginia Avenue Norfolk, Virginia 23511-3095 SUMMARY REPORT
48 WEST DOVE LANE (FORMERLY 1229 WEST DOVE LANE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0 Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid- Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



**Naval Facilities Engineering Command Atlantic** 

9324 Virginia Avenue Norfolk, Virginia 23511-3095

**Prepared by:** 



CDM - AECOM Multimedia Joint Venture 10560 Arrowhead Drive, Suite 500 Fairfax, Virginia 22030

Contract Number: N62470-14-D-9016

CTO WE52

**JUNE 2021** 



## **Table of Contents**

| 1.0        | INTRODUC | TION  | 1 |
|------------|----------|---|---|
| 1.1<br>1.2 |          | ND INFORMATIONSSMENT PROCESS                |   |
|            |          |   |   |
| 2.0        |          | ACTIVITIES AND RESULTS                      |   |
| 2.1<br>2.2 |          | SAMPLING                                    |   |
| 2.3        |          | LING  |   |
| 2.4        |          | YTICAL RESULTS                              | _ |
| 2.5<br>2.6 |          | ATER SAMPLING                               | - |
| <b>3.0</b> |          | STATUS                                      |   |
|            | _        |   |   |
| 4.0        | KEFEKENC | ES  | , |
|            |          |   |   |
|            |          | Tables                                      |   |
| <b>-</b>   |          |   |   |
| Table      |          | Laboratory Analytical Results - Vapor       |   |
| Table      |          | Laboratory Analytical Results - Soil        |   |
| Table      | 3        | Laboratory Analytical Results - Groundwater |   |
|            |          |   |   |
|            |          | Appendices                                  |   |
| Appen      | ndix A   | Multi-Media Selection Process for LBMH      |   |
| Appen      |          | Laboratory Analytical Report - Vapor        |   |
| Appen      |          | Laboratory Analytical Report - Soil         |   |
| Appen      |          | Laboratory Analytical Reports - Groundwater |   |
| Appen      |          | Regulatory Correspondence                   |   |
| p o        |          |   |   |



#### **List of Acronyms**

bgs below ground surface

BTEX benzene, toluene, ethylbenzene, and xylenes

CTO Contract Task Order

COPC constituents of potential concern

ft feet

GPR ground penetrating radar

IDIQ Indefinite Delivery, Indefinite Quantity

IGWA Initial Groundwater Assessment

JV Joint Venture

LBMH Laurel Bay Military Housing MCAS Marine Corps Air Station

NAVFAC Mid-Lant Naval Facilities Engineering Command Mid-Atlantic

NFA No Further Action

PAH polynuclear aromatic hydrocarbon QAPP Quality Assurance Program Plan

RBSL risk-based screening level

SCDHEC South Carolina Department of Health and Environmental Control

Site LBMH area at MCAS Beaufort, South Carolina

UFP SAP Uniform Federal Policy Sampling and Analysis Plan USEPA United States Environmental Protection Agency

UST underground storage tank

VI vapor intrusion

VISL vapor intrusion screening level



#### 1.0 INTRODUCTION

The CDM - AECOM Multimedia Joint Venture (JV) was contracted by the Naval Facilities Engineering Command, Mid-Atlantic (NAVFAC Mid-Lant) to provide reporting services for the heating oil underground storage tanks (USTs) located in Laurel Bay Military Housing (LBMH) area at the Marine Corps Air Station (MCAS) Beaufort, South Carolina (Site). This work has been awarded under Contract Task Order (CTO) WE52 of the Indefinite Delivery, Indefinite Quantity (IDIQ) Multimedia Environmental Compliance Contract (Contract No. N62470-14-D-9016).

As of January 2014, the LBMH addresses were re-numbered to comply with the E-911 emergency response addressing system; however, in order to remain consistent with historical sampling and reporting for LBMH area, the residences will continue to be referenced with their original address numbers in sample nomenclature and reporting documents.

This report summarizes the results the environmental investigation activities associated with the storage of home heating oil and the potential release of petroleum constituents at the referenced property. Based on the results of the investigation, a No Further Action (NFA) determination has been made by the South Carolina Department of Health and Environmental Control (SCDHEC) for 48 West Dove Lane (Formerly 1229 West Dove Lane). This NFA determination indicates that there are no unacceptable risks to human health or the environment for the petroleum constituents associated with the home heating oil USTs. The following information is included in this report:

- Background information;
- Sampling activities and results; and
- A determination of the property status.

## 1.1 Background Information

The LBMH area is located approximately 3.5 miles west of MCAS Beaufort. The area is approximately 970 acres in size and serves as an enlisted and officer family housing area. The area is configured with single family and duplex residential structures, and includes recreation, open space, and community facilities. The community includes approximately 1,300 housing units, including legacy Capehart style homes and newer duplex style homes. The housing area



is bordered on the west by salt marshes and the Broad River, and to the north, east and south by uplands. Forested areas lie along the northern and northeastern borders.


Capehart style homes within the LBMH area were formerly heated using heating oil stored in USTs at each residence. There were 1,100 Capehart style housing units in the LBMH area. The newer duplex homes within the LBMH area never utilized heating oil tanks. Heating oil has not been used at Laurel Bay since the mid-1980s. As was the accepted practice at the time, USTs were drained, filled with dirt, capped, and left in place when they were removed from service. Residential USTs are not regulated in the State of South Carolina (i.e., there are no federal or state laws governing installation, management, or removal).

In 2007, MCAS Beaufort began a voluntary program to remove the unregulated, residential USTs and conduct sampling activities to determine if, and to what extent, petroleum constituents may have impacted the surrounding environment. MCAS Beaufort coordinated with SCDHEC to develop removal procedures that were consistent with procedural requirements for regulated USTs. All tank removal activities and follow-on actions are conducted in coordination with SCDHEC. To date, all known USTs have been removed from all residential properties within the LBMH area.

MCAS Beaufort does not have documentation of the UST removal activities at 34 properties where it was discovered that a structure (i.e., home addition, garage, porch, or shed) had been historically constructed on top of the suspected former UST locations. The results of a historical document review and ground penetrating radar (GPR) survey at the 34 properties indicated there was no evidence that any of the former USTs remained in place beneath the structures and it was likely that the USTs were removed prior to 2007. The LBMH UST removal and assessment process is described below in Section 1.2. The LBMH multi-media investigation selection process tree, used to evaluate the environmental impact of USTs for most sites at LBMH, is presented in Appendix A. It should be noted that because soil and groundwater were not sampled following the UST removal and analytical results were not available for evaluation, the subject property of this report did not follow the typical multi-media investigation selection process presented in Appendix A.

#### 1.2 UST Assessment Process

As stated above, the assessment process at this property did not follow the typical process presented in Appendix A. Instead the process consisted first of a vapor intrusion (VI) assessment





to evaluate the potential risk to residents at the property. Soil gas samples for the VI assessment were collected from beneath the structure in the vicinity of the suspected location of the former UST. The VI assessment was later followed by an assessment of soil and groundwater outside the footprint of the house and in the vicinity of the suspected location of the former UST to evaluate the impact, if any, to these media.

During the VI investigation, soil gas samples were analyzed for a predetermined list of constituents of potential concern (COPCs) associated with the petroleum compounds found in home heating oil. These COPCs are as follows:

- benzene, toluene, ethylbenzene, and xylenes (BTEX), and
- naphthalene.

In accordance with the SCDHEC approved *Uniform Federal Policy Sampling and Analysis Plan* (*UFP SAP*) for Vapor Media, Revision 3 (Resolution Consultants, 2016), soil gas analytical results were compared to the United States Environmental Protection Agency (USEPA) vapor intrusion screening levels (VISLs) for soil gas (USEPA, 2016). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC. The soil gas results were used to determine whether petroleum vapors existed due to former USTs and to assess the associated risk to human health.

Following the VI investigations, soil and initial groundwater assessment (IGWA) investigations were conducted adjacent to the former UST locations at the 34 properties as an additional precautionary measure. Soil and groundwater samples collected were analyzed for a predetermined list of COPCs associated with the petroleum compounds found in home heating oil. These COPCs, derived from the *Quality Assurance Program Plan (QAPP)* for the *Underground Storage Tank Management Division, Revision 3.1* (SCDHEC, 2016) and the *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service,* (SCDHEC, 2018), are as follows:

- BTEX,
- naphthalene, and
- five select polynuclear aromatic hydrocarbon (PAHs): benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene and dibenz(a,h)anthracene.





In accordance with SCDHEC's *QAPP for the UST Management Division* (SCDHEC, 2016), the soil screening levels consists of SCDHEC risk-based screening levels (RBSLs). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC.

The results of the IGWA sampling were used to determine the presence or absence of the aforementioned COPCs in groundwater and identify whether former UST locations required additional delineation of COPCs in groundwater. Groundwater analytical results were compared to SCDHEC RBSLs for groundwater. The groundwater analytical results were also compared to the site specific groundwater VISLs as another line of evidence that VI is not a concern.

#### 2.0 SAMPLING ACTIVITIES AND RESULTS

The following section presents the sampling activities and associated results for 48 West Dove Lane (Formerly 1229 West Dove Lane). The sampling activities at 48 West Dove Lane (Formerly 1229 West Dove Lane) comprised a VI investigation, a soil investigation and IGWA sampling. Details regarding the VI investigation at this site are provided in the *Letter Report Petroleum Vapor Intrusion Investigations – June 2016 and January 2017, Revision 1* (Resolution Consultants, 2017). The laboratory report that includes the pertinent soil gas analytical results for this site is presented in Appendix B. Details regarding the soil and IGWA sampling activities at this site are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018). The laboratory reports that include the pertinent soil and IGWA analytical results for this site are presented in Appendices C and D, respectively.

### 2.1 Soil Gas Sampling

On June 23, 2016, a temporary near-slab vapor pin was installed and sampled at 48 West Dove Lane (Formerly 1229 West Dove Lane) in accordance with the SCDHEC approved *UFP SAP for Vapor Media, Revision 3* (Resolution Consultants, 2016). Soil gas sampling was conducted at this property to assess the potential risk for vapor intrusion associated with the suspected location of a former UST. The near-slab vapor pin was placed in the same general location as the suspected former heating oil UST, as determined by review of historical documents and GPR analysis. Further details are provided in the *Letter Report Petroleum Vapor Intrusion Investigations – June 2016 and January 2017, Revision 1* (Resolution Consultants, 2017).



The sampling strategy for this phase of the investigation required a one-time sampling event of the near-slab vapor pin. The near-slab vapor pin at 48 West Dove Lane (Formerly 1229 West Dove Lane) was sampled on June 23, 2016. A soil gas sample was collected and shipped to an offsite laboratory for analysis of the petroleum COPCs. Upon completion of soil gas sampling, the vapor pin was abandoned in accordance with the *UFP SAP for Vapor Media, Revision 3* (Resolution Consultants, 2016). Field forms are provided in the *Letter Report Petroleum Vapor Intrusion Investigations – June 2016 and January 2017, Revision 1* (Resolution Consultants, 2017).

## 2.2 Soil Gas Analytical Results

A summary of the laboratory analytical results and USEPA VISLs is presented in Table 1. A copy of the laboratory analytical data report is included in Appendix B.

The soil gas results collected from 48 West Dove Lane (Formerly 1229 West Dove Lane) were below USEPA VISLs, which indicated that the subsurface soil gas was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.

#### 2.3 Soil Sampling

On September 18, 2017, a single soil boring was advanced near the suspected former UST location at 48 West Dove Lane (Formerly 1229 West Dove Lane). The soil boring location is indicated on Figure 38 of the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018) and was collocated with the temporary monitoring well discussed in Section 2.5. A single soil sample was collected at a depth of approximately 8 feet (ft) below ground surface (bgs). The soil sample was shipped to an offsite laboratory for analysis of the petroleum COPCs. Soil sampling was performed in accordance with the *UFP SAP for Soil and Groundwater Media* (CDM-AECOM Multimedia JV, 2017) and the applicable South Carolina regulation R.61-92, Part 280 (SCDHEC, 2017) and assessment guidelines. Field forms are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018).

#### 2.4 Soil Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 2. A copy of the laboratory analytical data report is included as Appendix C.



The soil results collected from 48 West Dove Lane (Formerly 1229 West Dove Lane) were less than the SCDHEC RBSLs (Table 2), which indicated that the soil was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.

#### 2.5 Groundwater Sampling

On September 18, 2017, the soil boring was converted into a temporary monitoring well and then sampled at 48 West Dove Lane (Formerly 1229 West Dove Lane), in accordance with the South Carolina Well Standards and Regulations (R.61-71.H-I, updated June 24, 2016). In order to provide data that can be used to determine whether COPCs are migrating to underlying groundwater, the monitoring well was placed near the suspected location of the former heating oil UST. On September 18, 2017, one additional temporary monitoring well was also installed and then sampled at 48 West Dove Lane (Formerly 1229 West Dove Lane). Further details are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018).

The sampling strategy for this phase of the investigation required a one-time sampling event of the temporarily installed monitoring wells. Following well installation and development, groundwater samples were collected using low-flow methods and shipped to an offsite laboratory for analysis of the petroleum COPCs. Upon completion of groundwater sampling, the temporary wells were abandoned in accordance with the South Carolina Well Standards and Regulations R.61-71 (SCDHEC, 2016). Field forms are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018).

#### 2.6 Groundwater Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 3. A copy of the laboratory analytical data report is included in Appendix D.

The groundwater results collected from 48 West Dove Lane (Formerly 1229 West Dove Lane) were less than the SCDHEC RBSLs and the site-specific groundwater VISLs (Table 3), which indicated that the groundwater was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.



#### 3.0 PROPERTY STATUS

Based on the analytical results for soil and groundwater, SCDHEC made the determination that NFA was required for 48 West Dove Lane (Formerly 1229 West Dove Lane). The NFA determination for soil and groundwater was obtained in a letter dated March 29, 2018. Based on the analytical results for soil gas, it was determined that there was not a VI concern at this property and a recommendation was made for no additional VI assessment activities. SCDHEC approved the no further VI investigation recommendation for 48 West Dove Lane (Formerly 1229 West Dove Lane) in a letter dated June 20, 2017. SCDHEC's letters are provided in Appendix E.

#### 4.0 REFERENCES

- CDM-AECOM Multimedia JV, 2017. *Uniform Federal Policy Sampling and Analysis Plan for Soil and Groundwater Media for Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina*, July 2017.
- CDM-AECOM Multimedia JV, 2018. *Soil and Initial Groundwater Investigation Report September and October 2017 for Laurel Bay Military Housing Area, Revision 1, Multiple Properties, Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina*, February 2018.
- Resolution Consultants, 2016. *Uniform Federal Policy Sampling and Analysis Plan for Vapor Media* for Laurel Bay Military Housing Area, Revision 3, Multiple Properties, Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina, May 2016.
- Resolution Consultants, 2017. Letter Report Petroleum Vapor Intrusion Investigations June 2016 and January 2017 for Laurel Bay Military Housing Area, Revision 1, Multiple Properties, Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina, June 2017.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2013. *Quality Assurance Program Plan for the Underground Storage Tank Management* Division, *Revision 2.0*, April 2013.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2015. *Quality Assurance Program Plan for the Underground Storage Tank Management* Division, *Revision 3.0*, May 2015.



- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2016. *Quality Assurance Program Plan for the Underground Storage Tank Management* Division, *Revision 3.1*, February 2016.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2017. *R.61-92, Part 280, Underground Storage Tank Control Regulations*, March 2017.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2018. *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, March 2018.
- South Carolina Department of Health and Environmental Control Bureau of Water, 2016. *R.61-71, Well Standards*, June 2016.
- United States Environmental Protection Agency, 2016. *USEPA OSWER Vapor Intrusion Assessment, Vapor Intrusion Screening Level Calculator, Version 3.5.1,* May 2016.

## **Tables**



#### Table 1

## Laboratory Analytical Results - Vapor 48 West Dove Lane (Formerly 1229 West Dove Lane) Laurel Bay Military Housing Area

Marine Corps Air Station Beaufort
Beaufort, South Carolina

| Constituent                              | USEPA VISL (1)           | Results<br>Sample Collected 06/23/16 |
|--|--------------------------|--------------------------------------|
| <b>Volatile Organic Compounds Analyz</b> | ed by USEPA Method TO-15 | (μg/m³)                              |
| Benzene                                  | 12                       | 1.1                                  |
| Toluene                                  | 17000                    | 87                                   |
| Ethylbenzene                             | 37                       | 1.5                                  |
| m,p-Xylenes                              | 350                      | 4.8                                  |
| o-Xylene                                 | 350                      | 2.3                                  |
| Naphthalene                              | 2.8                      | ND                                   |

#### **Notes:**

VISLs are based on a residual exposure scenario and a target risk level of  $1x10^{-6}$  and a hazard quotient of 0.1. Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the residential VISL.

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The vapor laboratory report is provided in Appendix B.

USEPA - United States Environmental Protection Agency

µg/m<sup>3</sup> - micrograms per cubic meter

VISL - Vapor Intrusion Screening Level

<sup>&</sup>lt;sup>(1)</sup> United States Environmental Protection Agency Exterior Soil Gas Vapor Intrusion Screening Level (VISL) from VISL Calculator (Version 3.5.1, May 2016).

#### Table 2

# Laboratory Analytical Results - Soil 48 West Dove Lane (Formerly 1229 West Dove Lane) Laurel Bay Military Housing Area Marine Corps Air Station Beaufort

Beaufort, South Carolina

| Constituent   | SCDHEC RBSLs (1)                   | Results<br>Sample Collected 09/18/17 |  |  |  |  |  |  |  |
|---|------------------------------------|--------------------------------------|--|--|--|--|--|--|--|
| Volatile Organic Compounds Analyzed by EPA Method 8260B (mg/kg) |                                    |                                      |  |  |  |  |  |  |  |
| Benzene   | 0.007                              | ND                                   |  |  |  |  |  |  |  |
| Ethylbenzene  | 1.15                               | ND                                   |  |  |  |  |  |  |  |
| Naphthalene   | 0.036                              | ND                                   |  |  |  |  |  |  |  |
| Toluene   | 1.45                               | ND                                   |  |  |  |  |  |  |  |
| Xylenes, Total  | 14.5                               | ND                                   |  |  |  |  |  |  |  |
| Semivolatile Organic Compounds An                               | alyzed by EPA Method 8270D (mg/kg) |                                      |  |  |  |  |  |  |  |
| Benzo(a)anthracene  | 0.066                              | ND                                   |  |  |  |  |  |  |  |
| Benzo(b)fluoranthene  | 0.066                              | ND                                   |  |  |  |  |  |  |  |
| Benzo(k)fluoranthene  | 0.066                              | ND                                   |  |  |  |  |  |  |  |
| Chrysene  | 0.066                              | ND                                   |  |  |  |  |  |  |  |
| Dibenz(a,h)anthracene   | 0.066                              | ND                                   |  |  |  |  |  |  |  |

#### Notes:

(1) South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1 (SCDHEC, February 2016).

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL.

EPA - United States Environmental Protection Agency

mg/kg - milligrams per kilogram

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The soil laboratory report is provided in Appendix C.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

#### Table 3

# Laboratory Analytical Results - Groundwater 48 West Dove Lane (Formerly 1229 West Dove Lane) Laurel Bay Military Housing Area Marine Corps Air Station Beaufort

Beaufort, South Carolina

| Constituent  | SCDHEC RBSLs (1)              | Site-Specific<br>Groundwater VISLs | Results<br>Samples Collected 09/18/17 |      |  |  |  |  |  |  |
|--|-------------------------------|------------------------------------|---------------------------------------|------|--|--|--|--|--|--|
|  |                               | (µg/L) <sup>(2)</sup>              | TW01                                  | TW02 |  |  |  |  |  |  |
| Volatile Organic Compounds Analyzed by EPA Method 8260B (µg/L) |                               |                                    |                                       |      |  |  |  |  |  |  |
| Benzene  | 5                             | 16.24                              | ND                                    | ND   |  |  |  |  |  |  |
| Ethylbenzene   | 700                           | 45.95                              | ND                                    | ND   |  |  |  |  |  |  |
| Naphthalene  | 25                            | 29.33                              | ND                                    | ND   |  |  |  |  |  |  |
| Toluene  | 1000                          | 105,445                            | ND                                    | ND   |  |  |  |  |  |  |
| Xylenes, Total   | 10,000                        | 2,133                              | ND                                    | ND   |  |  |  |  |  |  |
| Semivolatile Organic Compound                                  | ls Analyzed by EPA Method 827 | '0D (μg/L)                         |                                       |      |  |  |  |  |  |  |
| Benzo(a)anthracene   | 10                            | NA                                 | ND                                    | ND   |  |  |  |  |  |  |
| Benzo(b)fluoranthene   | 10                            | NA                                 | ND                                    | ND   |  |  |  |  |  |  |
| Benzo(k)fluoranthene   | 10                            | NA                                 | ND                                    | ND   |  |  |  |  |  |  |
| Chrysene   | 10                            | NA                                 | ND                                    | ND   |  |  |  |  |  |  |
| Dibenz(a,h)anthracene  | 10                            | NA                                 | ND                                    | ND   |  |  |  |  |  |  |

#### Notes:

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL and/or the Site-Specific Groundwater VISL.

EPA - United States Environmental Protection Agency

JE - Johnson & Ettinger

NA - not applicable

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The groundwater laboratory report is provided in Appendix D.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

µg/L - micrograms per liter


VISL - Vapor Intrusion Screening Level

<sup>(1)</sup> South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1 (SCDHEC, February 2016).

<sup>(2)</sup> Site-specific groundwater VISLs were calculated using the EPA JE Model Spreadsheets (Version 3.1, February 2004) and conservative modeling inputs representative of a small single-story house with an 8 foot ceiling. Site-specific groundwater VISLs were developed based on a target risk level of 1x10<sup>-6</sup>, a target hazard quotient of 1 (per target organ), and a default residential exposure scenario, assuming exposure for 24 hours/day, 350 days/year, for 26 years. Modeling was performed for a range of depths to groundwater for application as appropriate in different areas of the Laurel Bay Military Housing Area. The most conservative levels are presented for comparison. Refer to Appendix H of the Uniform Federal Policy Sampling Analysis and Sampling Plan for Vapor Media, Revision 4 (Resolution Consultants, April 2017) for additional information.

## Appendix A Multi-Media Selection Process for LBMH



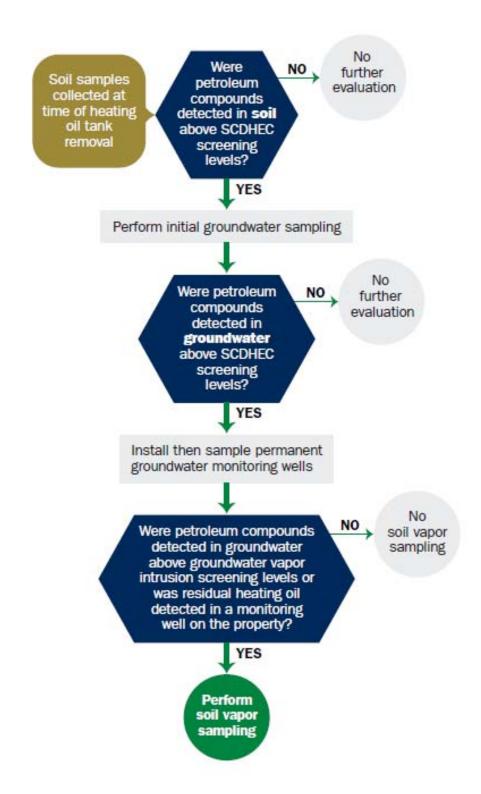

**Appendix A - Multi-Media Selection Process for LBMH** 

## Appendix B Laboratory Analytical Report - Vapor



#### ALS ENVIRONMENTAL

#### RESULTS OF ANALYSIS

Page 1 of 1

Client: AECOM

 Client Sample ID:
 BEALB1229SS01GS20160623
 ALS Project ID: P1603282

 Client Project ID:
 WE75 - 48 Dove Lane / 60492362.FI.WI
 ALS Sample ID: P1603282-001

Test Code: EPA TO-15 Date Collected: 6/23/16
Instrument ID: Tekmar AUTOCAN/Agilent 5975Binert/6890N/MS13 Date Received: 6/30/16
Analyst: Evelyn Alvarez Date Analyzed: 6/30/16

Sampling Media: 1.0 L Summa Canister Volume(s) Analyzed: 0.40 Liter(s)

Test Notes:

Container ID: 1SC00401

Initial Pressure (psig): 0.44 Final Pressure (psig): 5.25

Canister Dilution Factor: 1.32

| CAS#        | Compound     | Result<br>µg/m³ | LOQ<br>μg/m³ | LOD<br>μg/m³ | MDL<br>μg/m³ | Data<br>Qualifier |
|-------------|--------------|-----------------|--------------|--------------|--------------|-------------------|
| 71-43-2     | Benzene      | 1.1             | 1.7          | 1.5          | 0.53         | J                 |
| 108-88-3    | Toluene      | 87              | 1.7          | 1.4          | 0.56         |                   |
| 100-41-4    | Ethylbenzene | 1.5             | 1.7          | 1.4          | 0.53         | J                 |
| 179601-23-1 | m,p-Xylenes  | 4.8             | 3.3          | 2.7          | 0.99         |                   |
| 95-47-6     | o-Xylene     | 2.3             | 1.7          | 1.4          | 0.50         |                   |
| 91-20-3     | Naphthalene  | 1.3             | 1.7          | 1.3          | 0.59         | U                 |

U = Undetected at the limit of detection: The associated data value is the limit of detection, adjusted by any dilution factor used in the analysis. LOQ = Limit of Quantitation - The minimum quantity of a target analyte that can be confidently determined by the referenced method. J = The result is an estimated concentration that is less than the LOQ but greater than or equal to the MDL.

## Appendix C Laboratory Analytical Report - Soil



## Volatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB1229SB0108SO20170918

Laboratory ID: SI21025-001

Matrix: Solid

% Solids: 76.2 09/21/2017 2237

Date Sampled:09/18/2017 1025 Date Received: 09/21/2017

| Run | Prep Method | Analytical Method | Dilution | Analysis Date Analyst | Prep Date | Batch |
|-----|-------------|-------------------|----------|-----------------------|-----------|-------|
| 1   | 5035        | 8260B             | 1        | 09/27/2017 1548 TML   |           | 52617 |

| _               | CAS       | Analytical |        |   |     |     |     |           |
|-----------------|-----------|------------|--------|---|-----|-----|-----|-----------|
| Parameter       | Number    | Method     | Result | Q | LOQ | LOD | DL  | Units Run |
| Benzene         | 71-43-2   | 8260B      | 5.7    | U | 7.1 | 5.7 | 2.8 | ug/kg 1   |
| Ethylbenzene    | 100-41-4  | 8260B      | 5.7    | U | 7.1 | 5.7 | 2.8 | ug/kg 1   |
| Naphthalene     | 91-20-3   | 8260B      | 5.7    | U | 7.1 | 5.7 | 2.8 | ug/kg 1   |
| Toluene         | 108-88-3  | 8260B      | 5.7    | U | 7.1 | 5.7 | 2.8 | ug/kg 1   |
| Xylenes (total) | 1330-20-7 | 8260B      | 11     | U | 14  | 11  | 5.7 | ug/kg 1   |

| Q | Run 1 A<br>% Recovery | cceptance<br>Limits             |
|---|-----------------------|---------------------------------|
|   | 101                   | 79-119                          |
|   | 98                    | 78-119                          |
|   | 94                    | 71-136                          |
|   | 98                    | 85-116                          |
|   | Q                     | Q % Recovery<br>101<br>98<br>94 |

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria

E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40%

DL = Detection Limit

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

W = Reported on wet weight basis LOD = Limit of Detection

 $\mbox{ J = Estimated result < LOQ and } \geq \mbox{ DL}$ 

Shealy Environmental Services, Inc.

## Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB1229SB0108SO20170918 Date Sampled:09/18/2017 1025

Laboratory ID: SI21025-001 Matrix: Solid

% Solids: 76.2 09/21/2017 2237

Date Received: 09/21/2017

2-Methylnaphthalene-d10

| Run Prep Method<br>1 3550C | Analytical Method<br>8270D (SIM) |                            | lysis Date Analys<br>2/2017 0939 JCG |        |   | Batch<br>154 52123 |     |      |           |
|----------------------------|----------------------------------|----------------------------|--------------------------------------|--------|---|--------------------|-----|------|-----------|
| Parameter                  |                                  | CAS<br>Number              | Analytical<br>Method                 | Result | Q | LOQ                | LOD | DL   | Units Run |
| Benzo(a)anthracene         |                                  | 56-55-3                    | 8270D (SIM)                          |        | U | 4.3                | 2.6 | 0.76 | ug/kg 1   |
| Benzo(b)fluoranthene       |                                  | 205-99-2                   | 8270D (SIM)                          | 1.3    | U | 4.3                | 1.3 | 0.65 | ug/kg 1   |
| Benzo(k)fluoranthene       |                                  | 207-08-9                   | 8270D (SIM)                          | 1.3    | U | 4.3                | 1.3 | 0.62 | ug/kg 1   |
| Chrysene                   |                                  | 218-01-9                   | 8270D (SIM)                          | 1.3    | U | 4.3                | 1.3 | 0.58 | ug/kg 1   |
| Dibenzo(a,h)anthracene     |                                  | 53-70-3                    | 8270D (SIM)                          | 2.6    | U | 4.3                | 2.6 | 0.66 | ug/kg 1   |
| Surrogate                  |                                  | Run 1 Accep<br>Recovery Li | tance<br>mits                        |        |   |                    |     |      |           |
| Fluoranthene-d10           |                                  | 66 37-                     | 135                                  |        |   |                    |     |      | ,         |

17-119

61

LOQ = Limit of Quantitation B = Detected in the method blank E = Quantitation of compound exceeded the calibration range DL = Detection Limit Q = Surrogate failure U = Not detected at or above the LOQ N = Recovery is out of criteria P = The RPD between two GC columns exceeds 40%  $\mbox{ J = Estimated result < LOQ and } \geq \mbox{ DL}$ L = LCS/LCSD failure S = MS/MSD failure H = Out of holding time W = Reported on wet weight basis LOD = Limit of Detection

## Appendix D Laboratory Analytical Reports - Groundwater



## **Volatile Organic Compounds by GC/MS**

Client: AECOM - Resolution Consultants

Description: BEALB1229TW01WG20170918

Laboratory ID: SI20018-001

Matrix: Aqueous

Date Sampled:09/18/2017 1430
Date Received: 09/20/2017

5030B

Run Prep Method

1

Analytical Method Dilution Analysis Date Analyst Prep Date Batch 8260B 1 09/22/2017 0530 ECP 52152

| _               | CAS       | Analytical |        | _ |     |      |      |         |     |
|-----------------|-----------|------------|--------|---|-----|------|------|---------|-----|
| Parameter       | Number    | Method     | Result | Q | LOQ | LOD  | DL   | Units R | lun |
| Benzene         | 71-43-2   | 8260B      | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L    | 1   |
| Ethylbenzene    | 100-41-4  | 8260B      | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L    | 1   |
| Naphthalene     | 91-20-3   | 8260B      | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L    | 1   |
| Toluene         | 108-88-3  | 8260B      | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L    | 1   |
| Xylenes (total) | 1330-20-7 | 8260B      | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L    | 1   |

| Surrogate             | Q | Run 1 A<br>% Recovery | Acceptance<br>Limits |  |
|-----------------------|---|-----------------------|----------------------|--|
| Bromofluorobenzene    |   | 96                    | 85-114               |  |
| Dibromofluoromethane  |   | 89                    | 80-119               |  |
| 1,2-Dichloroethane-d4 |   | 97                    | 81-118               |  |
| Toluene-d8            |   | 92                    | 89-112               |  |

LOQ = Limit of Quantitation
U = Not detected at or above the LOQ
H = Out of holding time

B = Detected in the method blank
N = Recovery is out of criteria
W = Reported on wet weight basis

 $\label{eq:energy} E = \mbox{Quantitation of compound exceeded the calibration range} \\ P = \mbox{The RPD between two GC columns exceeds } 40\% \\ \mbox{LOD} = \mbox{Limit of Detection}$ 

DL = Detection Limit $J = Estimated result < LOQ and <math>\geq DL$  Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

## Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB1229TW01WG20170918

Laboratory ID: SI20018-001

Matrix: Aqueous

Date Sampled:09/18/2017 1430
Date Received: 09/20/2017

 Run
 Prep Method
 Analytical Method
 Dilution
 Analysis Date
 Analyst
 Prep Date
 Batch

 1
 3520C
 8270D
 1
 09/26/2017 1128
 CMP2
 09/24/2017 1331
 52281

| Parameter              | CAS<br>Number | Analytical      | Result Q | LOQ  | LOD  | DL    | Units Run |
|------------------------|---------------|-----------------|----------|------|------|-------|-----------|
| Benzo(a)anthracene     | 56-55-3       | Method<br>8270D | 0.10 U   | 0.20 | 0.10 | 0.040 | ug/L 1    |
| Delizo(a)alitilacelle  | 30-33-3       | 02700           | 0.10     | 0.20 | 0.10 | 0.040 | ug/L i    |
| Benzo(b)fluoranthene   | 205-99-2      | 8270D           | 0.10 U   | 0.20 | 0.10 | 0.040 | ug/L 1    |
| Benzo(k)fluoranthene   | 207-08-9      | 8270D           | 0.10 U   | 0.20 | 0.10 | 0.040 | ug/L 1    |
| Chrysene               | 218-01-9      | 8270D           | 0.10 U   | 0.20 | 0.10 | 0.040 | ug/L 1    |
| Dibenzo(a,h)anthracene | 53-70-3       | 8270D           | 0.10 U   | 0.20 | 0.10 | 0.040 | ug/L 1    |

| Surrogate        | Q | Run 1<br>% Recovery | Limits |
|------------------|---|---------------------|--------|
| Nitrobenzene-d5  |   | 56                  | 44-120 |
| 2-Fluorobiphenyl |   | 59                  | 44-119 |
| Terphenyl-d14    |   | 77                  | 50-134 |

LOQ = Limit of Quantitation
U = Not detected at or above the LOQ
H = Out of holding time

B = Detected in the method blank
N = Recovery is out of criteria
W = Reported on wet weight basis

E = Quantitation of compound exceeded the calibration range
P = The RPD between two GC columns exceeds 40%
LOD = Limit of Detection

J = Estimated result < LOQ and ≥ DL

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

## **Volatile Organic Compounds by GC/MS**

Client: AECOM - Resolution Consultants

Description: BEALB1229TW02WG20170918

Laboratory ID: SI20018-003

Matrix: Aqueous

Date Sampled: 09/18/2017 1505

Run Prep Method

Date Received: 09/20/2017

Analytical Method Dilution

Analysis Date Analyst **Prep Date** Batch

| 1          | 5030B | 8260B | 1 09/2  | 2/2017 0554 ECP |           | 52152 |      |      |
|------------|-------|-------|---------|-----------------|-----------|-------|------|------|
| Parameter  |       |       | CAS     | Analytical      | Result Q  | LOQ   | LOD  | DL   |
| 1 diameter |       |       | Number  | Method          | itesuit & | LOQ   | LOD  |      |
| Benzene    |       |       | 71-43-2 | 8260B           | 0.80 U    | 1.0   | 0.80 | 0.40 |

| Parameter       | Number        | Method | Result | Q | LOQ | LOD  | DL   | Units Run |
|-----------------|---------------|--------|--------|---|-----|------|------|-----------|
| Benzene         | 71-43-2       | 8260B  | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L 1    |
| Ethylbenzene    | 100-41-4      | 8260B  | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L 1    |
| Naphthalene     | 91-20-3       | 8260B  | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L 1    |
| Toluene         | 108-88-3      | 8260B  | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L 1    |
| Xylenes (total) | 1330-20-7     | 8260B  | 0.80   | U | 1.0 | 0.80 | 0.40 | ug/L 1    |
|                 | Dun 4 Assenta |        |        |   |     |      |      |           |

| Run 1<br>Q % Recovery | Acceptance<br>Limits           |
|-----------------------|--------------------------------|
| 97                    | 85-114                         |
| 87                    | 80-119                         |
| 95                    | 81-118                         |
| 92                    | 89-112                         |
|                       | Q % Recovery<br>97<br>87<br>95 |

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria W = Reported on wet weight basis

E = Quantitation of compound exceeded the calibration range P =The RPD between two GC columns exceeds 40% LOD = Limit of Detection

 $J = Estimated result < LOQ and \ge DL$ 

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

## Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB1229TW02WG20170918

Laboratory ID: SI20018-003

Matrix: Aqueous

Date Sampled: 09/18/2017 1505

2

3520C

3520C

Date Received: 09/20/2017 Run Prep Method

**Analytical Method Dilution Analysis Date Analyst Prep Date** Batch 8270D 09/26/2017 1920 CMP2 09/24/2017 1331 52281 8270D 10/03/2017 1010 CMP2 09/29/2017 1545 52812 1

|                        | CAS      | Analytical |        |    |      |      |       |         |    |
|------------------------|----------|------------|--------|----|------|------|-------|---------|----|
| Parameter              | Number   | Method     | Result | Q  | LOQ  | LOD  | DL    | Units R | un |
| Benzo(a)anthracene     | 56-55-3  | 8270D      | 0.10   | UQ | 0.20 | 0.10 | 0.040 | ug/L    | 1  |
| Benzo(b)fluoranthene   | 205-99-2 | 8270D      | 0.10   | UQ | 0.20 | 0.10 | 0.040 | ug/L    | 1  |
| Benzo(k)fluoranthene   | 207-08-9 | 8270D      | 0.10   | UQ | 0.20 | 0.10 | 0.040 | ug/L    | 1  |
| Chrysene               | 218-01-9 | 8270D      | 0.10   | UQ | 0.20 | 0.10 | 0.040 | ug/L    | 1  |
| Dibenzo(a,h)anthracene | 53-70-3  | 8270D      | 0.10   | UQ | 0.20 | 0.10 | 0.040 | ug/L    | 1  |

| Surrogate        | Q | Run 1<br>% Recovery | Acceptance<br>Limits | Q | Run 2 A<br>% Recovery | cceptance<br>Limits |
|------------------|---|---------------------|----------------------|---|-----------------------|---------------------|
| Nitrobenzene-d5  | N | 42                  | 44-120               | Н | 51                    | 44-120              |
| 2-Fluorobiphenyl | Ν | 41                  | 44-119               | Н | 46                    | 44-119              |
| Terphenyl-d14    |   | 67                  | 50-134               | Н | 78                    | 50-134              |

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria W = Reported on wet weight basis

E = Quantitation of compound exceeded the calibration range P =The RPD between two GC columns exceeds 40% LOD = Limit of Detection

DL = Detection Limit  $J = Estimated result < LOQ and \ge DL$ 

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

## Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB1229TW02WG20170918

Laboratory ID: SI20018-003

Matrix: Aqueous

Date Sampled:09/18/2017 1505

Date Received: 09/20/2017

 Run
 Prep Method
 Analytical Method
 Dilution
 Analysis Date
 Analyst
 Prep Date
 Batch

 1
 3520C
 8270D
 1
 09/26/2017 1920
 CMP2
 09/24/2017 1331
 52281

 2
 3520C
 8270D
 1
 10/03/2017 1010
 CMP2
 09/29/2017 1545
 52812

|                        | CAS      | Analytical |        |    |      |      |       |           |
|------------------------|----------|------------|--------|----|------|------|-------|-----------|
| Parameter              | Number   | Method     | Result | Q  | LOQ  | LOD  | DL    | Units Run |
| Benzo(a)anthracene     | 56-55-3  | 8270D      | 0.10   | UH | 0.20 | 0.10 | 0.040 | ug/L 2    |
| Benzo(b)fluoranthene   | 205-99-2 | 8270D      | 0.10   | UH | 0.20 | 0.10 | 0.040 | ug/L 2    |
| Benzo(k)fluoranthene   | 207-08-9 | 8270D      | 0.10   | UH | 0.20 | 0.10 | 0.040 | ug/L 2    |
| Chrysene               | 218-01-9 | 8270D      | 0.10   | UH | 0.20 | 0.10 | 0.040 | ug/L 2    |
| Dibenzo(a,h)anthracene | 53-70-3  | 8270D      | 0.10   | UH | 0.20 | 0.10 | 0.040 | ug/L 2    |

| Surrogate        | Q | Run 1 /<br>% Recovery | Acceptance<br>Limits | Q | Run 2 A<br>% Recovery | cceptance<br>Limits |
|------------------|---|-----------------------|----------------------|---|-----------------------|---------------------|
| Nitrobenzene-d5  | N | 42                    | 44-120               | Н | 51                    | 44-120              |
| 2-Fluorobiphenyl | N | 41                    | 44-119               | Н | 46                    | 44-119              |
| Terphenyl-d14    |   | 67                    | 50-134               | Н | 78                    | 50-134              |

LOQ = Limit of Quantitation
U = Not detected at or above the LOQ
H = Out of holding time

B = Detected in the method blank
N = Recovery is out of criteria
W = Reported on wet weight basis

 $\label{eq:energy} E = \mbox{Quantitation of compound exceeded the calibration range} \\ P = \mbox{The RPD between two GC columns exceeds } 40\% \\ \mbox{LOD} = \mbox{Limit of Detection}$ 

J = Estimated result < LOQ and ≥ DL

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

## Appendix E Regulatory Correspondence





June 20, 2017

Commanding Officer Attention: NREAO Mr. William A. Drawdy United State Marine Corps Air Station Post Office Box 55001 Beaufort, SC 29904-5001

RE: Approval Response to Comments and Draft Final Revision 1 Vapor Intrusion Report July 2015, January 2016 and May 2016, Laurel Bay Military Housing Area, Multiple Properties

RE: Approval Response to Comments and Draft Final Revision 1 Letter Report - Petroleum Vapor Intrusion Investigations - June 2016 and January 2017, Multiple Properties, Laurel Bay Military Housing Area

Dear Mr. Drawdy:

The South Carolina Department of Health and Environmental Control (DHEC) received the above referenced response to comments and errata pages on May 24 and June 7, 2017. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

DHEC has reviewed the response to comments and errata pages. Based on this review, DHEC did not generate any additional comments. Please note that the Department's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary. If you have any questions, please contact me at petruslb@dhec.sc.gov or 803-898-0294.

Sincerely,

Laurel Petrus

ZIRES

Department of Defense Corrective Action Section

Cc:

Russell Berry, EQC Region 8

Shawn Dolan, Resolution Consultants Bryan Beck, NAVFAC MIDLANT



March 29, 2018

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United State Marine Corps Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: Approved Response to Comments

Draft Final Revision 1 Soil and Initial Groundwater Investigation Report

September and October 2017 Laurel Bay Military Housing Area

Dear Mr. Drawdy:

The South Carolina Department of Health and Environmental Control (DHEC) received the above referenced Response to Comments and change pages on February 27, 2018. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

DHEC has reviewed the responses and change pages. Based on this review, DHEC has not generated any additional comments. The Department agrees there is no indication of soil or groundwater contamination on 36 of the 37 properties and therefore no further investigation is required at this time on the 36 properties. (See attached list). Please note that DHEC's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, DHEC retains the right to request further investigation if deemed necessary. If you have any questions, please contact me at petruslb@dhec.sc.gov or 803-898-0294.

Sincerely,

Laurel Petrus

Department of Defense Corrective Action Section

Cc:

**EQC Region 8** 

Shawn Dolan, Resolution Consultants Bryan Beck, NAVFAC MIDLANT

Attachment

## March 22, 2018

Draft Final Revision 1 Soil and Initial Groundwater Investigation Report September and October 2017 Laurel Bay Military Housing Area

## Properties recommended for NFA:

| 117 | Banyan Drive    | 215 | Balsam Street    | 521  | Laurel Bay Blvd |
|-----|-----------------|-----|------------------|------|-----------------|
| 138 | Laurel Bay Blvd | 217 | Balsam Street    | 606  | Dahlia Drive    |
| 146 | Laurel Bay Blvd | 266 | Beech Street     | 620  | Dahlia Drive    |
| 147 | Laurel Bay Blvd | 272 | Birch Drive      | 680  | Camelia Drive   |
| 149 | Laurel Bay Blvd | 307 | Ash Street       | 685  | Camelia Drive   |
| 157 | Cypress Street  | 327 | Ash Street       | 753  | Althea Street   |
| 204 | Balsam Street   | 365 | Aspen Street     | 918  | Barracuda Drive |
| 205 | Balsam Street   | 374 | Aspen Street     | 932  | Albacore Street |
| 206 | Balsam Street   | 393 | Acorn Drive      | 942  | Albacore Street |
| 207 | Balsam Street   | 406 | Elderberry Drive | 1203 | Cardinal Lane   |
| 209 | Balsam Street   | 438 | Elderberry Drive | 1229 | Dove Lane       |
| 213 | Balsam Street   | 461 | Elderberry Drive | 1313 | Albatross Drive |