

SUMMARY REPORT
560 ALBATROSS DRIVE (FORMERLY 1423 ALBATROSS DRIVE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid-Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

JUNE 2021

SUMMARY REPORT
560 ALBATROSS DRIVE (FORMERLY 1423 ALBATROSS DRIVE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid- Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic

9324 Virginia Avenue
Norfolk, Virginia 23511-3095

Prepared by:



CDM - AECOM Multimedia Joint Venture
10560 Arrowhead Drive, Suite 500
Fairfax, Virginia 22030

Contract Number: N62470-14-D-9016
CTO WE52
JUNE 2021

Table of Contents

1.0	INTRODUCTION.....	1
1.1	BACKGROUND INFORMATION.....	1
1.2	UST REMOVAL AND ASSESSMENT PROCESS.....	2
2.0	SAMPLING ACTIVITIES AND RESULTS.....	3
2.1	UST REMOVAL AND SOIL SAMPLING	3
2.2	SOIL ANALYTICAL RESULTS.....	4
3.0	PROPERTY STATUS	4
4.0	REFERENCES.....	4

Table

Table 1	Laboratory Analytical Results - Soil
---------	--------------------------------------

Appendices

Appendix A	Multi-Media Selection Process for LBMH
Appendix B	UST Assessment Report
Appendix C	Regulatory Correspondence

List of Acronyms

bgs	below ground surface
BTEX	benzene, toluene, ethylbenzene, and xylenes
CTO	Contract Task Order
COPC	constituents of potential concern
IDIQ	Indefinite Delivery, Indefinite Quantity
IGWA	Initial Groundwater Assessment
JV	Joint Venture
LBMH	Laurel Bay Military Housing
MCAS	Marine Corps Air Station
NAVFAC Mid-Lant	Naval Facilities Engineering Command Mid-Atlantic
NFA	No Further Action
PAH	polynuclear aromatic hydrocarbon
QAPP	Quality Assurance Program Plan
RBSL	risk-based screening level
SCDHEC	South Carolina Department of Health and Environmental Control
Site	LBMH area at MCAS Beaufort, South Carolina
UST	underground storage tank
VISL	vapor intrusion screening level

1.0 INTRODUCTION

The CDM - AECOM Multimedia Joint Venture (JV) was contracted by the Naval Facilities Engineering Command, Mid-Atlantic (NAVFAC Mid-Lant) to provide reporting services for the heating oil underground storage tanks (USTs) located in Laurel Bay Military Housing (LBMH) area at the Marine Corps Air Station (MCAS) Beaufort, South Carolina (Site). This work has been awarded under Contract Task Order (CTO) WE52 of the Indefinite Delivery, Indefinite Quantity (IDIQ) Multimedia Environmental Compliance Contract (Contract No. N62470-14-D-9016).

As of January 2014, the LBMH addresses were re-numbered to comply with the E-911 emergency response addressing system; however, in order to remain consistent with historical sampling and reporting for LBMH area, the residences will continue to be referenced with their original address numbers in sample nomenclature and reporting documents.

This report summarizes the results the environmental investigation activities associated with the storage of home heating oil and the potential release of petroleum constituents at the referenced property. Based on the results of the investigation, a No Further Action (NFA) determination has been made by the South Carolina Department of Health and Environmental Control (SCDHEC) for 560 Albatross Drive (Formerly 1423 Albatross Drive). This NFA determination indicates that there are no unacceptable risks to human health or the environment for the petroleum constituents associated with the home heating oil USTs. The following information is included in this report:

- Background information;
- Sampling activities and results; and
- A determination of the property status.

1.1 Background Information

The LBMH area is located approximately 3.5 miles west of MCAS Beaufort. The area is approximately 970 acres in size and serves as an enlisted and officer family housing area. The area is configured with single family and duplex residential structures, and includes recreation, open space, and community facilities. The community includes approximately 1,300 housing units, including legacy Capehart style homes and newer duplex style homes. The housing area

is bordered on the west by salt marshes and the Broad River, and to the north, east and south by uplands. Forested areas lie along the northern and northeastern borders.

Capehart style homes within the LBMH area were formerly heated using heating oil stored in USTs at each residence. There were 1,100 Capehart style housing units in the LBMH area. The newer duplex homes within the LBMH area never utilized heating oil tanks. Heating oil has not been used at Laurel Bay since the mid-1980s. As was the accepted practice at the time, USTs were drained, filled with dirt, capped, and left in place when they were removed from service. Residential USTs are not regulated in the State of South Carolina (i.e., there are no federal or state laws governing installation, management, or removal).

In 2007, MCAS Beaufort began a voluntary program to remove the unregulated, residential USTs and conduct sampling activities to determine if, and to what extent, petroleum constituents may have impacted the surrounding environment. MCAS Beaufort coordinated with SCDHEC to develop removal procedures that were consistent with procedural requirements for regulated USTs. All tank removal activities and follow-on actions are conducted in coordination with SCDHEC. To date, all known USTs have been removed from all residential properties within the LBMH area.

1.2 UST Removal and Assessment Process

During the UST removal process, a soil sample was collected from beneath the UST excavations (approximately 4 to 6 feet [ft] below ground surface [bgs]) and analyzed for a predetermined list of constituents of potential concern (COPCs) associated with the petroleum compounds found in home heating oil. These COPCs, derived from the *Quality Assurance Program Plan (QAPP) for the Underground Storage Tank Management Division, Revision 3.1* (SCDHEC, 2016) and the *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, (SCDHEC, 2018), are as follows:

- benzene, toluene, ethylbenzene, and xylenes (BTEX),
- naphthalene, and
- five select polynuclear aromatic hydrocarbon (PAHs): benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene and dibenz(a,h)anthracene.

Soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form. In accordance with SCDHEC's *QAPP for the UST Management*

Division (SCDHEC, 2016), the soil screening levels consists of SCDHEC risk-based screening levels (RBSLs). It should be noted that the RBSLs for select PAHs were revised in Revision 2.0 of the QAPP (SCDHEC, 2013) and were revised again in Revision 3.0 (SCDHEC, 2015). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC.

The results of the soil sampling at each former UST location were used to determine if a potential for groundwater contamination exists (i.e., soil results greater than RBSLs) and subsequently to select properties for follow-up initial groundwater assessment (IGWA) sampling. The results of the IGWA sampling (if necessary) are used to determine the presence or absence of the aforementioned COPCs in groundwater and identify whether former UST locations will require additional delineation of COPCs in groundwater. In order to delineate the extent of impact to groundwater, permanent wells are installed and a sampling program is established for those former UST locations where IGWA sampling has indicated the presence of COPCs in excess of the SCDHEC RBSLs for groundwater. Groundwater analytical results are also compared to the site specific groundwater vapor intrusion screening levels (VISLs) to evaluate the potential for vapor intrusion and the necessity for an investigation associated with this media. A multi-media investigation selection process tree, applicable to the LBMH UST investigations, is presented as Appendix A.

2.0 SAMPLING ACTIVITIES AND RESULTS

The following section presents the sampling activities and associated results for 560 Albatross Drive (Formerly 1423 Albatross Drive). Details regarding the soil investigation at this site are provided in the *SCDHEC UST Assessment Report – 1423 Albatross Drive* (MCAS Beaufort, 2009). The UST Assessment Report is provided in Appendix B.

2.1 UST Removal and Soil Sampling

On August 3, 2009, a single 280 gallon heating oil UST was removed from the back yard adjacent to the garage area at 560 Albatross Drive (Formerly 1423 Albatross Drive). The former UST location is indicated on Figures 2 and 3 of the UST Assessment Report (Appendix B). The UST was removed and properly disposed of (i.e., shipped offsite for recycling or transported to a landfill). There was no visual evidence (i.e., staining or sheen) of petroleum impact at the time of the UST removal. According to the UST Assessment Report (Appendix B), the depth to the base of the UST was 5'0" bgs and a single soil sample was collected from that

depth. The sample was collected from the fill port side of the former UST to represent a worst case scenario.

Following UST removal, a soil sample was collected from the base of the excavation and shipped to an offsite laboratory for analysis of the petroleum COPCs. Sampling was performed in accordance with applicable South Carolina regulation R.61-92, Part 280 (SCDHEC, 2017) and assessment guidelines.

2.2 Soil Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 1. A copy of the laboratory analytical data report is included in the UST Assessment Report presented in Appendix B. The laboratory analytical data report includes the soil results for the additional PAHs that were analyzed, but do not have associated RBSLs.

The soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form (Appendix B). The results of the soil sampling at the former UST location were used by MCAS Beaufort, in consultation with SCDHEC, to determine a path forward (i.e., additional sampling or NFA) for the property. The soil results collected from 560 Albatross Drive (Formerly 1423 Albatross Drive) were less than the SCDHEC RBSLs, which indicated the subsurface was not impacted by COPCs associated with the former UST at concentrations that presented a potential risk to human health and the environment.

3.0 PROPERTY STATUS

Based on the analytical results for soil, SCDHEC made the determination that NFA was required for 560 Albatross Drive (Formerly 1423 Albatross Drive). This NFA determination was obtained in a letter dated March 25, 2010. SCDHEC's NFA letter is provided in Appendix C.

4.0 REFERENCES

Marine Corps Air Station Beaufort, 2009. *South Carolina Department of Health and Environmental Control (SCDHEC) Underground Storage Tank Assessment Report – 1423 Albatross Drive, Laurel Bay Military Housing Area*, November 2009.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2013. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 2.0*, April 2013.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2015. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.0*, May 2015.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2016. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1*, February 2016.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2017. *R.61-92, Part 280, Underground Storage Tank Control Regulations*, March 2017.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2018. *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, March 2018.

Table

Table 1
Laboratory Analytical Results - Soil
560 Albatross Drive (Formerly 1423 Albatross Drive)
Laurel Bay Military Housing Area
Marine Corps Air Station Beaufort
Beaufort, South Carolina

Constituent	SCDHEC RBSLs ⁽¹⁾	Results Sample Collected 08/03/09
Volatile Organic Compounds Analyzed by EPA Method 8260B (mg/kg)		
Benzene	0.003	ND
Ethylbenzene	1.15	ND
Naphthalene	0.036	ND
Toluene	0.627	ND
Xylenes, Total	13.01	ND
Semivolatile Organic Compounds Analyzed by EPA Method 8270D (mg/kg)		
Benzo(a)anthracene	0.66	ND
Benzo(b)fluoranthene	0.66	ND
Benzo(k)fluoranthene	0.66	ND
Chrysene	0.66	ND
Dibenz(a,h)anthracene	0.66	ND

Notes:

⁽¹⁾ South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 1.0 and 1.1 (SCDHEC, May 2001 and SCDHEC, February 2011) and the Underground Storage Tank Assessment Guidelines (SCDHEC, February 2006).

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL.

EPA - United States Environmental Protection Agency

mg/kg - milligram per kilogram

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The laboratory report is provided in Appendix B.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

Appendix A
Multi-Media Selection Process for LBMH



Appendix A - Multi-Media Selection Process for LBMH

Appendix B
UST Assessment Report

South Carolina Department of Health and Environmental Control (SCDHEC)
Underground Storage Tank (UST) Assessment Report

Date Received	
State Use Only	

Submit Completed Form To:
 UST Program
 SCDHEC
 2600 Bull Street
 Columbia, South Carolina 29201
 Telephone (803) 896-7957

I. OWNERSHIP OF UST (S)

MCAS Beaufort, Commanding Officer Attn: NREAO (Craig Ehde)		
Owner Name (Corporation, Individual, Public Agency, Other)		
P.O. Box 55001		
Mailing Address		
Beaufort,	South Carolina	29904-5001
City	State	Zip Code
843	228-7317	Craig Ehde
Area Code	Telephone Number	Contact Person

II. SITE IDENTIFICATION AND LOCATION

Permit I.D. #	
Laurel Bay Military Housing Area, Marine Corps Air Station, Beaufort, SC	
Facility Name or Company Site Identifier	
1423 Albatross Drive, Laurel Bay Military Housing Area	
Street Address or State Road (as applicable)	
Beaufort,	Beaufort
City	County

Attachment 2

III. INSURANCE INFORMATION

Insurance Statement

The petroleum release reported to DHEC on _____ at Permit ID Number _____ may qualify to receive state monies to pay for appropriate site rehabilitation activities. Before participation is allowed in the State Clean-up fund, written confirmation of the existence or non-existence of an environmental insurance policy is required. **This section must be completed.**

Is there now, or has there ever been an insurance policy or other financial mechanism that covers this UST release? **YES**____ **NO**____ (check one)

If you answered **YES** to the above question, please complete the following information:

My policy provider is: _____
The policy deductible is: _____
The policy limit is: _____

If you have this type of insurance, please include a copy of the policy with this report.

IV. REQUEST FOR SUPERB FUNDING

I **DO** / **DO NOT** wish to participate in the SUPERB Program. (Circle one.)

V. CERTIFICATION (To be signed by the UST owner)

I certify that I have personally examined and am familiar with the information submitted in this and all attached documents; and that based on my inquiry of those individuals responsible for obtaining this information, I believe that the submitted information is true, accurate, and complete.

Name (Type or print.)

Signature

To be completed by Notary Public:

Sworn before me this _____ day of _____, 20____

(Name)

Notary Public for the state of _____
Please affix State seal if you are commissioned outside South Carolina

VI. UST INFORMATION

A. Product...(ex. Gas, Kerosene).....

B. Capacity..(ex. 1k, 2k).....

C. Age.....

D. Construction Material..(ex. Steel, FRP).....

E. Month/Year of Last Use.....

F. Depth (ft.) To Base of Tank.....

G. Spill Prevention Equipment Y/N.....

H. Overfill Prevention Equipment Y/N.....

I. Method of Closure Removed/Filled.....

J. Date Tanks Removed/Filled.....

K. Visible Corrosion or Pitting Y/N.....

L. Visible Holes Y/N.....

M. Method of disposal for any USTs removed from the ground (attach disposal manifests)

UST 1423Albatross was removed from the ground and disposed of at a
Subtitle "D" landfill. See Attachment "A."

N. Method of disposal for any liquid petroleum, sludges, or wastewaters removed from the USTs (attach disposal manifests)

UST 1423Albatross had been previously filled with sand by others.

O. If any corrosion, pitting, or holes were observed, describe the location and extent for each UST

Corrosion, pitting and holes were found throughout the tank.

1423				
Albatross				
Heating oil				
280 gal				
Late 1950s				
Steel				
Mid 1980s				
5'				
No				
No				
Removed				
8/3/09				
Yes				
Yes				

VII. PIPING INFORMATION

A. Construction Material..(ex. Steel, FRP).....

B. Distance from UST to Dispenser.....

C. Number of Dispensers.....

D. Type of System Pressure or Suction.....

E. Was Piping Removed from the Ground? Y/N

F. Visible Corrosion or Pitting Y/N.....

G. Visible Holes Y/N.....

H. Age.....

I. If any corrosion, pitting, or holes were observed, describe the location and extent for each piping run.

1423Albatross				
Steel & Copper				
N/A				
N/A				
Suction				
Yes				
Yes				
No				
Late 1950s				

Corrosion and pitting were found on the surface of the steel vent pipe. Copper supply and return lines were sound.

VIII. BRIEF SITE DESCRIPTION AND HISTORY

The USTs at the residences are constructed of single wall steel and formerly contained fuel oil for heating. These USTs were installed in the late 1950s and last used in the mid 1980s.

IX. SITE CONDITIONS

	Yes	No	Unk
A. Were any petroleum-stained or contaminated soils found in the UST excavation, soil borings, trenches, or monitoring wells? If yes, indicate depth and location on the site map.		X	
B. Were any petroleum odors detected in the excavation, soil borings, trenches, or monitoring wells? If yes, indicate location on site map and describe the odor (strong, mild, etc.)		X	
C. Was water present in the UST excavation, soil borings, or trenches? If yes, how far below land surface (indicate location and depth)?		X	
D. Did contaminated soils remain stockpiled on site after closure? If yes, indicate the stockpile location on the site map. Name of DHEC representative authorizing soil removal:		X	
E. Was a petroleum sheen or free product detected on any excavation or boring waters? If yes, indicate location and thickness.		X	

X. SAMPLE INFORMATION

A. SCDHEC Lab Certification Number 96012001

B.

Sample #	Location	Sample Type (Soil/Water)	Soil Type (Sand/Clay)	Depth*	Date/Time of Collection	Collected by	OVA #
1423	Excav at	Soil	Sandy	5'	8/3/09	P. Shaw	
Albatross	fill end				0935 hrs		
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

* = Depth Below the Surrounding Land Surface

XI. SAMPLING METHODOLOGY

Provide a detailed description of the methods used to collect and store the samples. Also include the preservative used for each sample. Please use the space provided below.

Sampling was performed in accordance with SC DHEC R.61-92 Part 280 and SC DHEC Assessment Guidelines. Sample containers were prepared by the testing laboratory. The grab method was utilized to fill the sample containers leaving as little head space as possible and immediately capped. Soil samples were extracted from area below tank. The samples were marked, logged, and immediately placed in a sample cooler packed with ice to maintain an approximate temperature of 4 degrees Centigrade. Tools were thoroughly cleaned and decontaminated with the seven step decon process after each use. The samples remained in custody of SBG-EEG, Inc. until they were transferred to Test America Incorporated for analysis as documented in the Chain of Custody Record.


XII. RECEPTORS

	Yes	No
A. Are there any lakes, ponds, streams, or wetlands located within 1000 feet of the UST system? *Broad R. ~1,000' If yes, indicate type of receptor, distance, and direction on site map.	*X	
B. Are there any public, private, or irrigation water supply wells within 1000 feet of the UST system? If yes, indicate type of well, distance, and direction on site map.		X
C. Are there any underground structures (e.g., basements) Located within 100 feet of the UST system? If yes, indicate type of structure, distance, and direction on site map.		X
D. Are there any underground utilities (e.g., telephone, electricity, gas, water, sewer, storm drain) located within 100 feet of the UST system that could potentially come in contact with the contamination? *Sewer, water & geothermal If yes, indicate the type of utility, distance, and direction on the site map.	*X	
E. Has contaminated soil been identified at a depth less than 3 feet below land surface in an area that is not capped by asphalt or concrete? If yes, indicate the area of contaminated soil on the site map.		X


XIII. SITE MAP

You must supply a scaled site map. It should include all buildings, road names, utilities, tank and dispenser island locations, labeled sample locations, extent of excavation, and any other pertinent information.

(Attach Site Map Here)

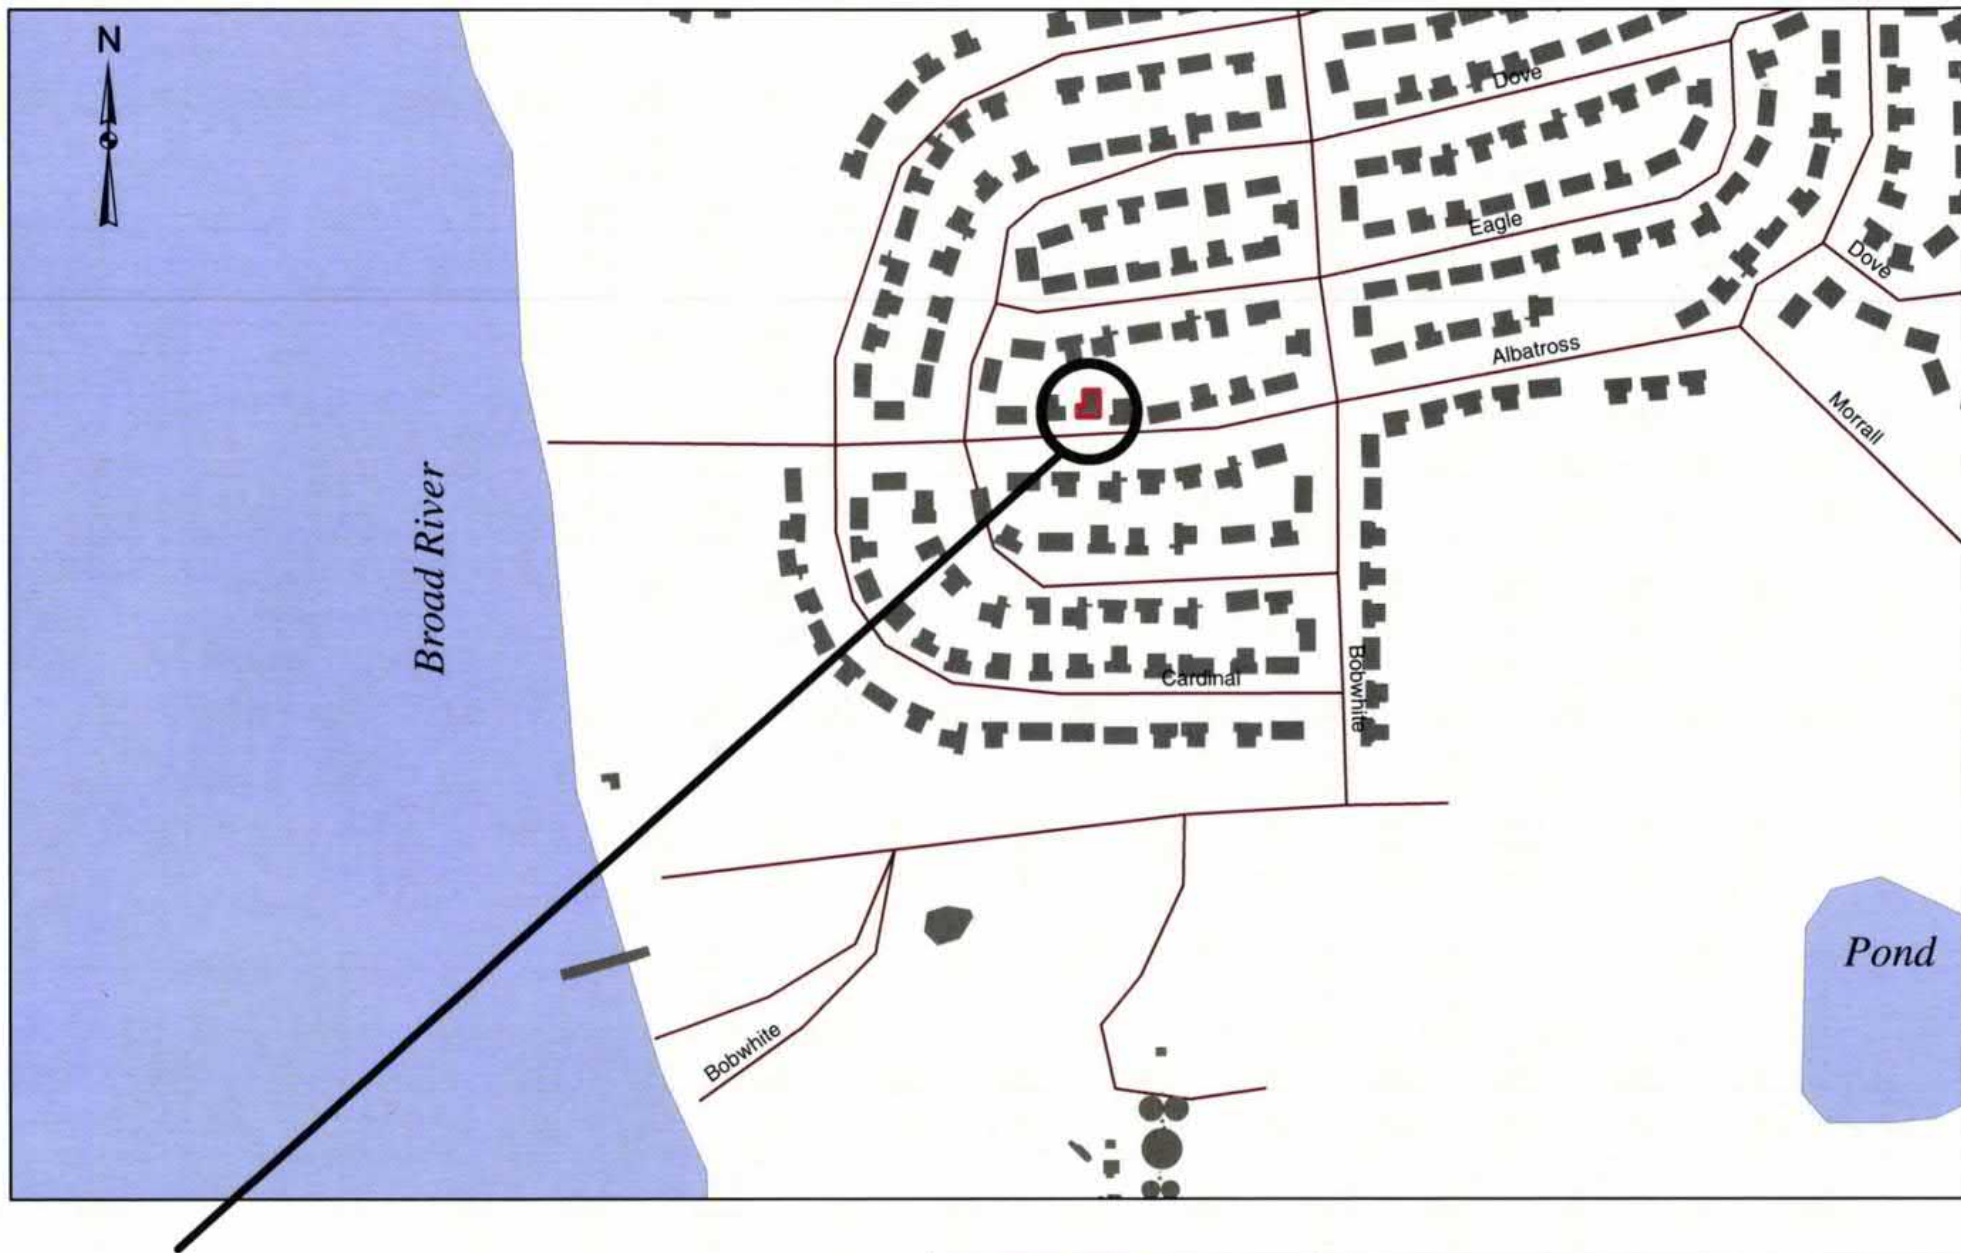

1423 ALBATROSS DR.



SBG-EEG, Inc.

Small Business Group, Inc.
10179 Hwy 78
Ladson, SC 29456

Ph. (843) 879-0400

Drawn By: L. DiAsio

Dwg Date: Aug 2009

FIGURE 1: LOCATION MAP
1423 ALBATROSS DR., LAUREL BAY
MCAS BEAUFORT SC



← BROAD RIVER ≈ 1,000'

GEO THERMAL LINES ↗


UST 1423ALBATROSS



1423 ALBATROSS DRIVE
LAUREL BAY MILITARY HOUSING
MCAS BEAUFORT, SC

ASPHALT
DRIVEWAY

GRAPHIC SCALE



SBG-EEG

10179 HWY 78
LADSON, SC 29456


ph. (843) 879-0400

FIGURE 2 SITE MAP
1423 ALBATROSS DR., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC


DWG DATE AUG 2009

← BROAD RIVER ≈ 1,000'

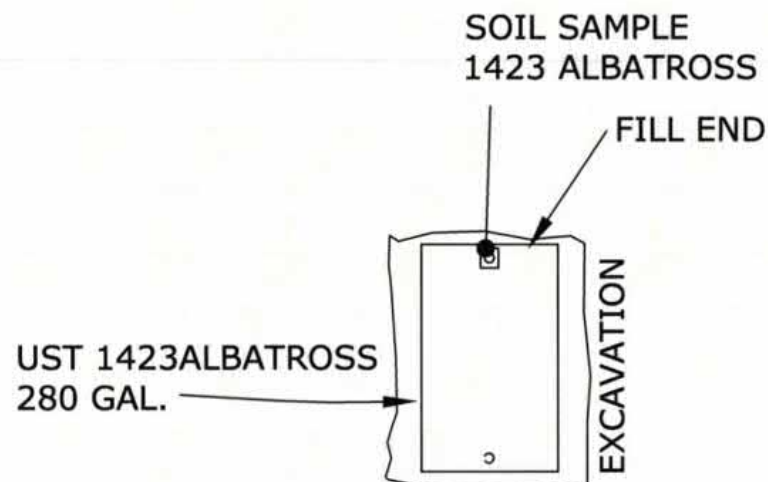

GRASS

REAR OF
1423 ALBATROSS DR.



UST 1423ALBATROSS WAS
24" BELOW GRADE.

SBG-EEG

10179 HWY 78
LADSON, SC 29456

ph. (843) 879-0400

FIGURE 3 UST SAMPLE LOCATIONS
1423 ALBATROSS DR., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE AUG 2009



Picture 1: Location of UST 1423 Albatross.

XIV. SUMMARY OF ANALYSIS RESULTS

Enter the soil analytical data for each soil boring for all COC in the table below and on the following page.

CoC	UST	1423Albatross						
Benzene		ND						
Toluene		ND						
Ethylbenzene		ND						
Xylenes		ND						
Naphthalene		ND						
Benzo (a) anthracene		ND						
Benzo (b) fluoranthene		ND						
Benzo (k) fluoranthene		ND						
Chrysene		ND						
Dibenz (a, h) anthracene		ND						
TPH (EPA 3550)								

CoC								
Benzene								
Toluene								
Ethylbenzene								
Xylenes								
Naphthalene								
Benzo (a) anthracene								
Benzo (b) fluoranthene								
Benzo (k) fluoranthene								
Chrysene								
Dibenz (a, h) anthracene								
TPH (EPA 3550)								

SUMMARY OF ANALYSIS RESULTS (cont'd)

Enter the ground water analytical data for each sample for all CoC in the table below. If free product is present, indicate the measured thickness to the nearest 0.01 feet.

CoC	RBSL (µg/l)	W-1	W-2	W -3	W -4
Free Product Thickness	None				
Benzene	5				
Toluene	1,000				
Ethylbenzene	700				
Xylenes	10,000				
Total BTEX	N/A				
MTBE	40				
Naphthalene	25				
Benzo (a) anthracene	10				
Benzo (b) flouranthene	10				
Benzo (k) flouranthene	10				
Chrysene	10				
Dibenz (a, h) anthracene	10				
EDB	.05				
1,2-DCA	5				
Lead	Site specific				

XV. ANALYTICAL RESULTS

You must submit the laboratory report and chain-of-custody form for the samples. These samples must be analyzed by a South Carolina certified laboratory.

(Attach Certified Analytical Results and Chain-of-Custody Here)
(Please see Form #4)

August 21, 2009 12:35:36PM

Client: EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn: Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Nbr: [none]
P/O Nbr: 08087
Date Received: 08/07/09

SAMPLE IDENTIFICATION	LAB NUMBER	COLLECTION DATE AND TIME
1423 Albatross	NSH0575-01	08/03/09 09:35
1426 Albatross	NSH0575-02	08/03/09 09:15
1428 Albatross	NSH0575-03	08/03/09 13:30
1431 Dove	NSH0575-04	08/03/09 13:45
1440 Dove	NSH0575-05	08/04/09 09:00
1447 Dove	NSH0575-06	08/04/09 09:30
1438 Dove	NSH0575-07	08/04/09 11:45
1441 Dove	NSH0575-08	08/04/09 13:55
1439 Dove	NSH0575-09	08/04/09 15:15

An executed copy of the chain of custody, the project quality control data, and the sample receipt form are also included as an addendum to this report. If you have any questions relating to this analytical report, please contact your Laboratory Project Manager at 1-800-765-0980. Any opinions, if expressed, are outside the scope of the Laboratory's accreditation.

This material is intended only for the use of the individual(s) or entity to whom it is addressed, and may contain information that is privileged and confidential. If you are not the intended recipient, or the employee or agent responsible for delivering this material to the intended recipient, you are hereby notified that any dissemination, distribution, or copying of this material is strictly prohibited. If you have received this material in error, please notify us immediately at 615-726-0177.

South Carolina Certification Number: 84009001

The Chain(s) of Custody, 2 pages, are included and are an integral part of this report.

These results relate only to the items tested. This report shall not be reproduced except in full and with permission of the laboratory.

All solids results are reported in wet weight unless specifically stated.

Estimated uncertainty is available upon request.

This report has been electronically signed.

Report Approved By:



Ken A. Hayes

Senior Project Manager

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-01 (1423 Albatross - Soil) Sampled: 08/03/09 09:35								
General Chemistry Parameters								
% Dry Solids	82.8		%	0.500	1	08/19/09 14:20	SW-846	9082734
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	ND		mg/kg dry	0.00206	1	08/13/09 15:22	SW846 8260B	9081164
Ethylbenzene	ND		mg/kg dry	0.00206	1	08/13/09 15:22	SW846 8260B	9081164
Naphthalene	ND		mg/kg dry	0.00515	1	08/13/09 15:22	SW846 8260B	9081164
Toluene	ND		mg/kg dry	0.00206	1	08/13/09 15:22	SW846 8260B	9081164
Xylenes, total	ND		mg/kg dry	0.00515	1	08/13/09 15:22	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	93 %					08/13/09 15:22	SW846 8260B	9081164
Surr: Dibromofluoromethane (75-125%)	89 %					08/13/09 15:22	SW846 8260B	9081164
Surr: Toluene-d8 (76-129%)	102 %					08/13/09 15:22	SW846 8260B	9081164
Surr: 4-Bromofluorobenzene (67-147%)	110 %					08/13/09 15:22	SW846 8260B	9081164

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-01 (1423 Albatross - Soil) - cont. Sampled: 08/03/09 09:35									
Polyaromatic Hydrocarbons by EPA 8270D									
Acenaphthene	ND		mg/kg dry	0.0382	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Acenaphthylene	ND		mg/kg dry	0.0370	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Anthracene	ND	L	mg/kg dry	0.0394	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Benzo (a) anthracene	ND		mg/kg dry	0.0453	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Benzo (a) pyrene	ND	L	mg/kg dry	0.0358	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Benzo (b) fluoranthene	ND		mg/kg dry	0.0358	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0358	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Benzo (k) fluoranthene	ND		mg/kg dry	0.0358	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Chrysene	ND		mg/kg dry	0.0477	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0370	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Fluoranthene	ND		mg/kg dry	0.0405	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Fluorene	ND		mg/kg dry	0.0429	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0370	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Naphthalene	ND		mg/kg dry	0.0489	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Phenanthrene	ND		mg/kg dry	0.0405	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Pyrene	ND	L	mg/kg dry	0.0489	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
1-Methylnaphthalene	ND		mg/kg dry	0.0382	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
2-Methylnaphthalene	ND		mg/kg dry	0.0394	0.0799	1	08/14/09 17:51	SW846 8270D	9081773
Surr: Terphenyl-d14 (18-120%)	74 %					1	08/14/09 17:51	SW846 8270D	9081773
Surr: 2-Fluorobiphenyl (14-120%)	59 %					1	08/14/09 17:51	SW846 8270D	9081773
Surr: Nitrobenzene-d5 (17-120%)	65 %					1	08/14/09 17:51	SW846 8270D	9081773

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-02 (1426 Albatross - Soil) Sampled: 08/03/09 09:15								
General Chemistry Parameters								
% Dry Solids	82.9		%	0.500	1	08/19/09 14:20	SW-846	9082734
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	ND		mg/kg dry	0.00207	1	08/13/09 15:52	SW846 8260B	9081164
Ethylbenzene	0.00873		mg/kg dry	0.00207	1	08/13/09 15:52	SW846 8260B	9081164
Naphthalene	0.464		mg/kg dry	0.272	50	08/14/09 19:29	SW846 8260B	9082671
Toluene	ND		mg/kg dry	0.00207	1	08/13/09 15:52	SW846 8260B	9081164
Xylenes, total	ND		mg/kg dry	0.00517	1	08/13/09 15:52	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	95 %					08/13/09 15:52	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	90 %					08/14/09 19:29	SW846 8260B	9082671
Surr: Dibromofluoromethane (75-125%)	92 %					08/13/09 15:52	SW846 8260B	9081164
Surr: Dibromofluoromethane (75-125%)	97 %					08/14/09 19:29	SW846 8260B	9082671
Surr: Toluene-d8 (76-129%)	99 %					08/13/09 15:52	SW846 8260B	9081164
Surr: Toluene-d8 (76-129%)	87 %					08/14/09 19:29	SW846 8260B	9082671
Surr: 4-Bromofluorobenzene (67-147%)	104 %					08/13/09 15:52	SW846 8260B	9081164
Surr: 4-Bromofluorobenzene (67-147%)	88 %					08/14/09 19:29	SW846 8260B	9082671

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-02 (1426 Albatross - Soil) - cont. Sampled: 08/03/09 09:15									
Polyaromatic Hydrocarbons by EPA 8270D									
Acenaphthene	ND		mg/kg dry	0.0379	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Acenaphthylene	ND		mg/kg dry	0.0367	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Anthracene	ND	L	mg/kg dry	0.0391	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Benzo (a) anthracene	ND		mg/kg dry	0.0450	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Benzo (a) pyrene	ND	L	mg/kg dry	0.0355	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Benzo (b) fluoranthene	ND		mg/kg dry	0.0355	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0355	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Benzo (k) fluoranthene	ND		mg/kg dry	0.0355	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Chrysene	ND		mg/kg dry	0.0474	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0367	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Fluoranthene	0.153		mg/kg dry	0.0403	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Fluorene	ND		mg/kg dry	0.0426	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0367	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Naphthalene	0.0648	J	mg/kg dry	0.0486	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Phenanthrene	0.224		mg/kg dry	0.0403	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Pyrene	0.143	CF2, CF6, LI	mg/kg dry	0.0486	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
1-Methylnaphthalene	0.295		mg/kg dry	0.0379	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
2-Methylnaphthalene	0.411		mg/kg dry	0.0391	0.0794	1	08/14/09 18:14	SW846 8270D	9081773
Surr: Terphenyl-d14 (18-120%)	77 %					1	08/14/09 18:14	SW846 8270D	9081773
Surr: 2-Fluorobiphenyl (14-120%)	54 %					1	08/14/09 18:14	SW846 8270D	9081773
Surr: Nitrobenzene-d5 (17-120%)	63 %					1	08/14/09 18:14	SW846 8270D	9081773

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-03 (1428 Albatross - Soil) Sampled: 08/03/09 13:30								
General Chemistry Parameters								
% Dry Solids	75.9		%	0.500	1	08/19/09 14:20	SW-846	9082734
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	ND		mg/kg dry	0.00230	1	08/13/09 16:22	SW846 8260B	9081164
Ethylbenzene	ND		mg/kg dry	0.00230	1	08/13/09 16:22	SW846 8260B	9081164
Naphthalene	ND		mg/kg dry	0.00574	1	08/13/09 16:22	SW846 8260B	9081164
Toluene	ND		mg/kg dry	0.00230	1	08/13/09 16:22	SW846 8260B	9081164
Xylenes, total	ND		mg/kg dry	0.00574	1	08/13/09 16:22	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	104 %					08/13/09 16:22	SW846 8260B	9081164
Surr: Dibromofluoromethane (75-125%)	96 %					08/13/09 16:22	SW846 8260B	9081164
Surr: Toluene-d8 (76-129%)	95 %					08/13/09 16:22	SW846 8260B	9081164
Surr: 4-Bromofluorobenzene (67-147%)	98 %					08/13/09 16:22	SW846 8260B	9081164

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwec

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-03 (1428 Albatross - Soil) - cont. Sampled: 08/03/09 13:30									
Polyaromatic Hydrocarbons by EPA 8270D									
Acenaphthene	ND		mg/kg dry	0.0418	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Acenaphthylene	ND		mg/kg dry	0.0405	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Anthracene	ND	L	mg/kg dry	0.0431	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Benzo (a) anthracene	0.132		mg/kg dry	0.0496	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Benzo (a) pyrene	0.0566	J, L	mg/kg dry	0.0392	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Benzo (b) fluoranthene	0.0705	J	mg/kg dry	0.0392	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0392	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Benzo (k) fluoranthene	0.0701	J	mg/kg dry	0.0392	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Chrysene	0.133		mg/kg dry	0.0522	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0405	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Fluoranthene	0.260		mg/kg dry	0.0444	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Fluorene	0.0575	J	mg/kg dry	0.0470	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0405	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Naphthalene	ND		mg/kg dry	0.0536	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Phenanthrene	0.163		mg/kg dry	0.0444	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Pyrene	0.253	CF2, CF6, L1	mg/kg dry	0.0536	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
1-Methylnaphthalene	0.123		mg/kg dry	0.0418	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
2-Methylnaphthalene	0.165		mg/kg dry	0.0431	0.0875	1	08/14/09 18:38	SW846 8270D	9081773
Surr: Terphenyl-d14 (18-120%)	85 %					1	08/14/09 18:38	SW846 8270D	9081773
Surr: 2-Fluorobiphenyl (14-120%)	64 %					1	08/14/09 18:38	SW846 8270D	9081773
Surr: Nitrobenzene-d5 (17-120%)	69 %					1	08/14/09 18:38	SW846 8270D	9081773

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-04 (1431 Dove - Soil) Sampled: 08/03/09 13:45								
General Chemistry Parameters								
% Dry Solids	85.9		%	0.500	1	08/19/09 14:20	SW-846	9082734
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	ND		mg/kg dry	0.00208	1	08/13/09 16:53	SW846 8260B	9081164
Ethylbenzene	0.00423		mg/kg dry	0.00208	1	08/13/09 16:53	SW846 8260B	9081164
Naphthalene	0.638		mg/kg dry	0.243	50	08/14/09 19:59	SW846 8260B	9082671
Toluene	ND		mg/kg dry	0.00208	1	08/13/09 16:53	SW846 8260B	9081164
Xylenes, total	ND		mg/kg dry	0.00521	1	08/13/09 16:53	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	135 %					08/13/09 16:53	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	100 %					08/14/09 19:59	SW846 8260B	9082671
Surr: Dibromofluoromethane (75-125%)	130 %	ZX				08/13/09 16:53	SW846 8260B	9081164
Surr: Dibromofluoromethane (75-125%)	108 %					08/14/09 19:59	SW846 8260B	9082671
Surr: Toluene-d8 (76-129%)	98 %					08/13/09 16:53	SW846 8260B	9081164
Surr: Toluene-d8 (76-129%)	82 %					08/14/09 19:59	SW846 8260B	9082671
Surr: 4-Bromofluorobenzene (67-147%)	128 %					08/13/09 16:53	SW846 8260B	9081164
Surr: 4-Bromofluorobenzene (67-147%)	92 %					08/14/09 19:59	SW846 8260B	9082671

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-04 (1431 Dove - Soil) - cont. Sampled: 08/03/09 13:45									
Polyaromatic Hydrocarbons by EPA 8270D									
Accnaphthene	ND		mg/kg dry	0.364	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Accnaphthylene	ND		mg/kg dry	0.353	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Anthracene	ND	L	mg/kg dry	0.376	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Benzo (a) anthracene	ND		mg/kg dry	0.432	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Benzo (a) pyrene	ND	L	mg/kg dry	0.341	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Benzo (b) fluoranthene	ND		mg/kg dry	0.341	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Benzo (g,h,i) perylene	ND		mg/kg dry	0.341	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Benzo (k) fluoranthene	ND		mg/kg dry	0.341	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Chrysene	ND		mg/kg dry	0.455	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Dibenz (a,h) anthracene	ND		mg/kg dry	0.353	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Fluoranthene	ND		mg/kg dry	0.387	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Fluorene	1.69		mg/kg dry	0.410	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.353	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Naphthalene	ND		mg/kg dry	0.467	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Phenanthrene	ND		mg/kg dry	0.387	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Pyrene	ND	L	mg/kg dry	0.467	0.762	10	08/15/09 20:58	SW846 8270D	9081773
1-Methylnaphthalene	4.20		mg/kg dry	0.364	0.762	10	08/15/09 20:58	SW846 8270D	9081773
2-Methylnaphthalene	3.71		mg/kg dry	0.376	0.762	10	08/15/09 20:58	SW846 8270D	9081773
Surr: Terphenyl-d14 (18-120%)	85 %					10	08/15/09 20:58	SW846 8270D	9081773
Surr: 2-Fluorobiphenyl (14-120%)	86 %					10	08/15/09 20:58	SW846 8270D	9081773
Surr: Nitrobenzene-d5 (17-120%)	79 %					10	08/15/09 20:58	SW846 8270D	9081773

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwce

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-05 (1440 Dove - Soil) Sampled: 08/04/09 09:00								
General Chemistry Parameters								
% Dry Solids	82.6		%	0.500	1	08/19/09 14:20	SW-846	9082734
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	0.00351		mg/kg dry	0.00205	1	08/13/09 17:23	SW846 8260B	9081164
Ethylbenzene	1.87		mg/kg dry	0.108	50	08/14/09 20:29	SW846 8260B	9082671
Naphthalene	12.2		mg/kg dry	2.70	500	08/17/09 18:23	SW846 8260B	9082672
Toluene	0.0156		mg/kg dry	0.00205	1	08/13/09 17:23	SW846 8260B	9081164
Xylenes, total	8.08		mg/kg dry	0.270	50	08/14/09 20:29	SW846 8260B	9082671
Surr: 1,2-Dichloroethane-d4 (67-138%)	96 %					08/13/09 17:23	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	87 %					08/14/09 20:29	SW846 8260B	9082671
Surr: 1,2-Dichloroethane-d4 (67-138%)	95 %					08/17/09 18:23	SW846 8260B	9082672
Surr: Dibromofluoromethane (75-125%)	90 %					08/13/09 17:23	SW846 8260B	9081164
Surr: Dibromofluoromethane (75-125%)	90 %					08/14/09 20:29	SW846 8260B	9082671
Surr: Dibromofluoromethane (75-125%)	94 %					08/17/09 18:23	SW846 8260B	9082672
Surr: Toluene-d8 (76-129%)	131 %	ZX				08/13/09 17:23	SW846 8260B	9081164
Surr: Toluene-d8 (76-129%)	95 %					08/14/09 20:29	SW846 8260B	9082671
Surr: Toluene-d8 (76-129%)	94 %					08/17/09 18:23	SW846 8260B	9082672
Surr: 4-Bromofluorobenzene (67-147%)	458 %	ZX				08/13/09 17:23	SW846 8260B	9081164
Surr: 4-Bromofluorobenzene (67-147%)	106 %					08/14/09 20:29	SW846 8260B	9082671
Surr: 4-Bromofluorobenzene (67-147%)	94 %					08/17/09 18:23	SW846 8260B	9082672

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwec

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-05 (1440 Dove - Soil) - cont. Sampled: 08/04/09 09:00									
Polyaromatic Hydrocarbons by EPA 8270D									
Acenaphthene	ND		mg/kg dry	0.0379	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Acenaphthylene	ND		mg/kg dry	0.0367	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Anthracene	0.357		mg/kg dry	0.0390	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Benzo (a) anthracene	0.0816		mg/kg dry	0.0450	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Benzo (a) pyrene	ND		mg/kg dry	0.0355	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Benzo (b) fluoranthene	0.0599	J	mg/kg dry	0.0355	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0355	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Benzo (k) fluoranthene	ND		mg/kg dry	0.0355	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Chrysene	0.128		mg/kg dry	0.0473	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0367	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Fluoranthene	0.395		mg/kg dry	0.0402	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Fluorene	2.79		mg/kg dry	0.0426	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0367	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Naphthalene	2.33		mg/kg dry	0.0485	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
Phenanthrene	6.70		mg/kg dry	0.201	0.396	5	08/19/09 15:25	SW846 8270D	9082723
Pyrene	0.487		mg/kg dry	0.0485	0.0793	1	08/19/09 04:51	SW846 8270D	9082723
1-Methylnaphthalene	17.2		mg/kg dry	0.379	0.793	10	08/19/09 18:36	SW846 8270D	9082723
2-Methylnaphthalene	23.5		mg/kg dry	0.390	0.793	10	08/19/09 18:36	SW846 8270D	9082723
Surr: Terphenyl-d14 (18-120%)	64 %					1	08/19/09 04:51	SW846 8270D	9082723
Surr: 2-Fluorobiphenyl (14-120%)	84 %					1	08/19/09 04:51	SW846 8270D	9082723
Surr: Nitrobenzene-d5 (17-120%)	182 %	ZX				1	08/19/09 04:51	SW846 8270D	9082723

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-06 (1447 Dove - Soil) Sampled: 08/04/09 09:30								
General Chemistry Parameters								
% Dry Solids	75.7		%	0.500	1	08/19/09 14:20	SW-846	9082734
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	ND		mg/kg dry	0.106	50	08/18/09 18:56	SW846 8260B	9081749
Ethylbenzene	ND		mg/kg dry	0.106	50	08/18/09 18:56	SW846 8260B	9081749
Naphthalene	0.923		mg/kg dry	0.264	50	08/18/09 18:56	SW846 8260B	9081749
Toluene	ND		mg/kg dry	0.106	50	08/18/09 18:56	SW846 8260B	9081749
Xylenes, total	ND		mg/kg dry	0.264	50	08/18/09 18:56	SW846 8260B	9081749
Surr: 1,2-Dichloroethane-d4 (67-138%)	96 %					08/18/09 18:56	SW846 8260B	9081749
Surr: Dibromofluoromethane (75-125%)	94 %					08/18/09 18:56	SW846 8260B	9081749
Surr: Toluene-d8 (76-129%)	100 %					08/18/09 18:56	SW846 8260B	9081749
Surr: 4-Bromofluorobenzene (67-147%)	106 %					08/18/09 18:56	SW846 8260B	9081749

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-06 (1447 Dove - Soil) - cont. Sampled: 08/04/09 09:30									
Polyaromatic Hydrocarbons by EPA 8270D									
Accnaphthene	0.590		mg/kg dry	0.0413	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Accnaphthylene	ND		mg/kg dry	0.0400	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Anthracene	2.23		mg/kg dry	0.0426	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Benzo (a) anthracene	7.13		mg/kg dry	0.245	0.432	5	08/19/09 15:49	SW846 8270D	9082723
Benzo (a) pyrene	2.15		mg/kg dry	0.0387	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Benzo (b) fluoranthene	2.57		mg/kg dry	0.0387	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Benzo (g,h,i) perylene	0.581		mg/kg dry	0.0387	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Benzo (k) fluoranthene	2.00		mg/kg dry	0.0387	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Chrysene	4.14		mg/kg dry	0.0516	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Dibenz (a,h) anthracene	0.443		mg/kg dry	0.0400	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Fluoranthene	15.5		mg/kg dry	0.439	0.864	10	08/19/09 19:00	SW846 8270D	9082723
Fluorene	1.70		mg/kg dry	0.0464	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Indeno (1,2,3-cd) pyrene	0.690		mg/kg dry	0.0400	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Naphthalene	ND		mg/kg dry	0.0529	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Phenanthrene	15.3		mg/kg dry	0.219	0.432	5	08/19/09 15:49	SW846 8270D	9082723
Pyrene	18.3		mg/kg dry	0.264	0.432	5	08/19/09 15:49	SW846 8270D	9082723
1-Methylnaphthalene	2.44		mg/kg dry	0.0413	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
2-Methylnaphthalene	3.79		mg/kg dry	0.0426	0.0864	1	08/19/09 05:15	SW846 8270D	9082723
Surr: Terphenyl-d14 (18-120%)	68 %					1	08/19/09 05:15	SW846 8270D	9082723
Surr: 2-Fluorobiphenyl (14-120%)	62 %					1	08/19/09 05:15	SW846 8270D	9082723
Surr: Nitrobenzene-d5 (17-120%)	92 %					1	08/19/09 05:15	SW846 8270D	9082723

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwce

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-07 (1438 Dove - Soil) Sampled: 08/04/09 11:45								
General Chemistry Parameters								
% Dry Solids	86.1		%	0.500	1	08/19/09 14:20	SW-846	9082734
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	ND		mg/kg dry	0.00201	1	08/13/09 18:23	SW846 8260B	9081164
Ethylbenzene	1.18		mg/kg dry	0.0989	50	08/14/09 21:00	SW846 8260B	9082671
Naphthalene	4.42		mg/kg dry	0.247	50	08/14/09 21:00	SW846 8260B	9082671
Toluene	0.00805		mg/kg dry	0.00201	1	08/13/09 18:23	SW846 8260B	9081164
Xylenes, total	6.20		mg/kg dry	0.247	50	08/14/09 21:00	SW846 8260B	9082671
Surr: 1,2-Dichloroethane-d4 (67-138%)	95 %					08/13/09 18:23	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	91 %					08/14/09 21:00	SW846 8260B	9082671
Surr: Dibromofluoromethane (75-125%)	88 %					08/13/09 18:23	SW846 8260B	9081164
Surr: Dibromofluoromethane (75-125%)	92 %					08/14/09 21:00	SW846 8260B	9082671
Surr: Toluene-d8 (76-129%)	108 %					08/13/09 18:23	SW846 8260B	9081164
Surr: Toluene-d8 (76-129%)	94 %					08/14/09 21:00	SW846 8260B	9082671
Surr: 4-Bromofluorobenzene (67-147%)	126 %					08/13/09 18:23	SW846 8260B	9081164
Surr: 4-Bromofluorobenzene (67-147%)	105 %					08/14/09 21:00	SW846 8260B	9082671

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-07 (1438 Dove - Soil) - cont. Sampled: 08/04/09 11:45									
Polyaromatic Hydrocarbons by EPA 8270D									
Accnaphthene	ND		mg/kg dry	0.368	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Accnaphthylene	ND		mg/kg dry	0.357	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Anthracene	0.453	J, L	mg/kg dry	0.380	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Benzo (a) anthracene	ND		mg/kg dry	0.437	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Benzo (a) pyrene	ND	L	mg/kg dry	0.345	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Benzo (b) fluoranthene	ND		mg/kg dry	0.345	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Benzo (g,h,i) perylene	ND		mg/kg dry	0.345	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Benzo (k) fluoranthene	ND		mg/kg dry	0.345	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Chrysene	ND		mg/kg dry	0.460	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Dibenz (a,h) anthracene	ND		mg/kg dry	0.357	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Fluoranthene	1.12		mg/kg dry	0.391	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Fluorene	2.54		mg/kg dry	0.414	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.357	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Naphthalene	6.93		mg/kg dry	0.472	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Phenanthrene	4.49		mg/kg dry	0.391	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Pyrene	ND	L	mg/kg dry	0.472	0.771	10	08/15/09 22:09	SW846 8270D	9081773
1-Methylnaphthalene	21.7		mg/kg dry	0.368	0.771	10	08/15/09 22:09	SW846 8270D	9081773
2-Methylnaphthalene	30.1		mg/kg dry	0.380	0.771	10	08/15/09 22:09	SW846 8270D	9081773
Surr: Terphenyl-d14 (18-120%)	82 %					10	08/15/09 22:09	SW846 8270D	9081773
Surr: 2-Fluorobiphenyl (14-120%)	86 %					10	08/15/09 22:09	SW846 8270D	9081773
Surr: Nitrobenzene-d5 (17-120%)	194 %	ZX				10	08/15/09 22:09	SW846 8270D	9081773

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwce

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-08 (1441 Dove - Soil) Sampled: 08/04/09 13:55								
General Chemistry Parameters								
% Dry Solids	81.6		%	0.500	1	08/19/09 10:43	SW-846	9082732
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	0.00373		mg/kg dry	0.00196	1	08/13/09 18:53	SW846 8260B	9081164
Ethylbenzene	ND	RL1	mg/kg dry	0.103	50	08/14/09 21:30	SW846 8260B	9082671
Naphthalene	0.697		mg/kg dry	0.258	50	08/14/09 21:30	SW846 8260B	9082671
Toluene	0.193		mg/kg dry	0.103	50	08/14/09 21:30	SW846 8260B	9082671
Xylenes, total	2.86		mg/kg dry	0.258	50	08/14/09 21:30	SW846 8260B	9082671
Surr: 1,2-Dichloroethane-d4 (67-138%)	114 %					08/13/09 18:53	SW846 8260B	9081164
Surr: 1,2-Dichloroethane-d4 (67-138%)	92 %					08/14/09 21:30	SW846 8260B	9082671
Surr: Dibromofluoromethane (75-125%)	101 %					08/13/09 18:53	SW846 8260B	9081164
Surr: Dibromofluoromethane (75-125%)	89 %					08/14/09 21:30	SW846 8260B	9082671
Surr: Toluene-d8 (76-129%)	161 %	ZX				08/13/09 18:53	SW846 8260B	9081164
Surr: Toluene-d8 (76-129%)	94 %					08/14/09 21:30	SW846 8260B	9082671
Surr: 4-Bromofluorobenzene (67-147%)	349 %	ZX				08/13/09 18:53	SW846 8260B	9081164
Surr: 4-Bromofluorobenzene (67-147%)	110 %					08/14/09 21:30	SW846 8260B	9082671

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwec

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-08 (1441 Dove - Soil) - cont. Sampled: 08/04/09 13:55									
Polyaromatic Hydrocarbons by EPA 8270D									
Acenaphthene	ND		mg/kg dry	1.53	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Acenaphthylene	ND		mg/kg dry	1.48	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Anthracene	ND	L	mg/kg dry	1.58	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Benzo (a) anthracene	ND		mg/kg dry	1.82	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Benzo (a) pyrene	ND	L	mg/kg dry	1.44	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Benzo (b) fluoranthene	ND		mg/kg dry	1.44	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Benzo (g,h,i) perylene	ND		mg/kg dry	1.44	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Benzo (k) fluoranthene	ND		mg/kg dry	1.44	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Chrysene	ND		mg/kg dry	1.91	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Dibenz (a,h) anthracene	ND		mg/kg dry	1.48	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Fluoranthene	ND		mg/kg dry	1.63	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Fluorene	ND		mg/kg dry	1.72	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	1.48	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Naphthalene	ND		mg/kg dry	1.96	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Phenanthrene	ND		mg/kg dry	1.63	3.21	20	08/14/09 20:37	SW846 8270D	9081773
Pyrene	2.36	J, L	mg/kg dry	1.96	3.21	20	08/14/09 20:37	SW846 8270D	9081773
1-Methylnaphthalene	6.96		mg/kg dry	1.53	3.21	20	08/14/09 20:37	SW846 8270D	9081773
2-Methylnaphthalene	5.60		mg/kg dry	1.58	3.21	20	08/14/09 20:37	SW846 8270D	9081773
<i>Surr: Terphenyl-d14 (18-120%)</i>	<i>98 %</i>					<i>20</i>	<i>08/14/09 20:37</i>	<i>SW846 8270D</i>	<i>9081773</i>
<i>Surr: 2-Fluorobiphenyl (14-120%)</i>	<i>78 %</i>					<i>20</i>	<i>08/14/09 20:37</i>	<i>SW846 8270D</i>	<i>9081773</i>
<i>Surr: Nitrobenzene-d5 (17-120%)</i>	<i>150 %</i>	<i>ZX</i>				<i>20</i>	<i>08/14/09 20:37</i>	<i>SW846 8270D</i>	<i>9081773</i>

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwec

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-09 (1439 Dove - Soil) Sampled: 08/04/09 15:15								
General Chemistry Parameters								
% Dry Solids	80.6		%	0.500	1	08/19/09 10:43	SW-846	9082732
Selected Volatile Organic Compounds by EPA Method 8260B								
Benzene	0.00268		mg/kg dry	0.00197	1	08/17/09 16:03	SW846 8260B	9082672
Ethylbenzene	0.0283		mg/kg dry	0.00197	1	08/17/09 16:03	SW846 8260B	9082672
Naphthalene	1.27		mg/kg dry	0.350	50	08/17/09 18:53	SW846 8260B	9082672
Toluene	ND		mg/kg dry	0.00197	1	08/17/09 16:03	SW846 8260B	9082672
Xylenes, total	0.122		mg/kg dry	0.00492	1	08/17/09 16:03	SW846 8260B	9082672
Surr: 1,2-Dichloroethane-d4 (67-138%)	103 %					08/17/09 16:03	SW846 8260B	9082672
Surr: 1,2-Dichloroethane-d4 (67-138%)	93 %					08/17/09 18:53	SW846 8260B	9082672
Surr: Dibromofluoromethane (75-125%)	99 %					08/17/09 16:03	SW846 8260B	9082672
Surr: Dibromofluoromethane (75-125%)	96 %					08/17/09 18:53	SW846 8260B	9082672
Surr: Toluene-d8 (76-129%)	106 %					08/17/09 16:03	SW846 8260B	9082672
Surr: Toluene-d8 (76-129%)	89 %					08/17/09 18:53	SW846 8260B	9082672
Surr: 4-Bromofluorobenzene (67-147%)	129 %					08/17/09 16:03	SW846 8260B	9082672
Surr: 4-Bromofluorobenzene (67-147%)	96 %					08/17/09 18:53	SW846 8260B	9082672

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Batch
Sample ID: NSH0575-09 (1439 Dove - Soil) - cont. Sampled: 08/04/09 15:15									
Polyaromatic Hydrocarbons by EPA 8270D									
Acenaphthene	ND		mg/kg dry	0.0394	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Acenaphthylene	ND		mg/kg dry	0.0381	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Anthracene	ND	L	mg/kg dry	0.0406	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Benzo (a) anthracene	ND		mg/kg dry	0.0467	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Benzo (a) pyrene	ND	L	mg/kg dry	0.0369	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Benzo (b) fluoranthene	ND		mg/kg dry	0.0369	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0369	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Benzo (k) fluoranthene	ND		mg/kg dry	0.0369	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Chrysene	ND		mg/kg dry	0.0492	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0381	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Fluoranthene	ND		mg/kg dry	0.0418	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Fluorene	0.202		mg/kg dry	0.0443	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0381	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Naphthalene	0.194		mg/kg dry	0.0504	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Phenanthrene	0.421		mg/kg dry	0.0418	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Pyrene	0.0586	J, L	mg/kg dry	0.0504	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
1-Methylnaphthalene	0.917		mg/kg dry	0.0394	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
2-Methylnaphthalene	1.33		mg/kg dry	0.0406	0.0824	1	08/14/09 21:01	SW846 8270D	9081773
Surr: Terphenyl-d14 (18-120%)	87 %					1	08/14/09 21:01	SW846 8270D	9081773
Surr: 2-Fluorobiphenyl (14-120%)	55 %					1	08/14/09 21:01	SW846 8270D	9081773
Surr: Nitrobenzene-d5 (17-120%)	64 %					1	08/14/09 21:01	SW846 8270D	9081773

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwce

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

SAMPLE EXTRACTION DATA

Parameter	Batch	Lab Number	Wt/Vol Extracted	Extracted Vol	Date	Analyst	Extraction Method
Polyaromatic Hydrocarbons by EPA 8270D							
SW846 8270D	9081773	NSH0575-01	30.38	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-02	30.55	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9082723	NSH0575-02RE1	30.14	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9081773	NSH0575-03	30.26	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9082723	NSH0575-03RE1	30.39	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9081773	NSH0575-04	30.69	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-04RE1	30.69	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9082723	NSH0575-04RE2	30.77	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9082723	NSH0575-04RE3	30.77	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9081773	NSH0575-05	30.44	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-05RE1	30.44	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-05RE2	30.44	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9082723	NSH0575-05RE3	30.70	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9082723	NSH0575-05RE4	30.70	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9082723	NSH0575-05RE5	30.70	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9081773	NSH0575-06	30.26	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-06RE1	30.26	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-06RE2	30.26	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9082723	NSH0575-06RE3	30.72	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9082723	NSH0575-06RE4	30.72	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9082723	NSH0575-06RE5	30.72	1.00	08/18/09 11:30	AJF	EPA 3550C
SW846 8270D	9081773	NSH0575-07	30.28	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-07RE1	30.28	1.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-08	30.72	2.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-08RE1	30.72	2.00	08/13/09 14:30	TEM	EPA 3550C
SW846 8270D	9081773	NSH0575-09	30.26	1.00	08/13/09 14:30	TEM	EPA 3550C
Selected Volatile Organic Compounds by EPA Method 8260B							
SW846 8260B	9081164	NSH0575-01	5.86	5.00	08/03/09 09:35	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-02	5.83	5.00	08/03/09 09:15	JRL	EPA 5035
SW846 8260B	9082671	NSH0575-02RE1	5.54	5.00	08/03/09 09:15	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-03	5.74	5.00	08/03/09 13:30	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-04	5.59	5.00	08/03/09 13:45	JRL	EPA 5035
SW846 8260B	9082671	NSH0575-04RE1	6.00	5.00	08/03/09 13:45	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-05	5.92	5.00	08/04/09 09:00	JRL	EPA 5035
SW846 8260B	9082671	NSH0575-05RE1	5.61	5.00	08/04/09 09:00	JRL	EPA 5035
SW846 8260B	9082672	NSH0575-05RE2	5.61	5.00	08/04/09 09:00	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-06	6.12	5.00	08/04/09 09:30	JRL	EPA 5035
SW846 8260B	9082672	NSH0575-06RE1	5.94	5.00	08/04/09 09:30	JRL	EPA 5035
SW846 8260B	9081749	NSH0575-06RE2	6.25	5.00	08/04/09 09:30	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-07	5.78	5.00	08/04/09 11:45	JRL	EPA 5035
SW846 8260B	9082671	NSH0575-07RE1	5.87	5.00	08/04/09 11:45	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-08	6.25	5.00	08/04/09 13:55	JRL	EPA 5035
SW846 8260B	9082671	NSH0575-08RE1	5.94	5.00	08/04/09 13:55	JRL	EPA 5035
SW846 8260B	9081164	NSH0575-09	6.58	5.00	08/04/09 15:15	JRL	EPA 5035

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

SAMPLE EXTRACTION DATA

Parameter	Batch	Lab Number	Wt/Vol Extracted	Extracted Vol	Date	Analyst	Extraction Method
SW846 8260B	9082672	NSH0575-09RE1	6.30	5.00	08/04/09 15:15	JRL	EPA 5035
SW846 8260B	9082672	NSH0575-09RE2	4.43	5.00	08/04/09 15:15	JRL	EPA 5035

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA

Blank

Analyte	Blank Value	Q	Units	Q.C. Batch	Lab Number	Analyzed Date/Time
---------	-------------	---	-------	------------	------------	--------------------

Selected Volatile Organic Compounds by EPA Method 8260B

9081164-BLK1

Benzene	<0.000670		mg/kg wet	9081164	9081164-BLK1	08/13/09 14:21
Ethylbenzene	<0.000670		mg/kg wet	9081164	9081164-BLK1	08/13/09 14:21
Naphthalene	<0.00170		mg/kg wet	9081164	9081164-BLK1	08/13/09 14:21
Toluene	<0.000400		mg/kg wet	9081164	9081164-BLK1	08/13/09 14:21
Xylenes, total	<0.00130		mg/kg wet	9081164	9081164-BLK1	08/13/09 14:21
Surrogate: 1,2-Dichloroethane-d4	103%			9081164	9081164-BLK1	08/13/09 14:21
Surrogate: Dibromofluoromethane	94%			9081164	9081164-BLK1	08/13/09 14:21
Surrogate: Toluene-d8	94%			9081164	9081164-BLK1	08/13/09 14:21
Surrogate: 4-Bromofluorobenzene	97%			9081164	9081164-BLK1	08/13/09 14:21

9081749-BLK1

Benzene	<0.0335		mg/kg wet	9081749	9081749-BLK1	08/18/09 15:16
Ethylbenzene	<0.0335		mg/kg wet	9081749	9081749-BLK1	08/18/09 15:16
Naphthalene	<0.0850		mg/kg wet	9081749	9081749-BLK1	08/18/09 15:16
Toluene	0.0240	B	mg/kg wet	9081749	9081749-BLK1	08/18/09 15:16
Xylenes, total	<0.0650		mg/kg wet	9081749	9081749-BLK1	08/18/09 15:16
Surrogate: 1,2-Dichloroethane-d4	104%			9081749	9081749-BLK1	08/18/09 15:16
Surrogate: Dibromofluoromethane	99%			9081749	9081749-BLK1	08/18/09 15:16
Surrogate: Toluene-d8	102%			9081749	9081749-BLK1	08/18/09 15:16
Surrogate: 4-Bromofluorobenzene	102%			9081749	9081749-BLK1	08/18/09 15:16

9082671-BLK1

Benzene	<0.000670		mg/kg wet	9082671	9082671-BLK1	08/14/09 18:59
Ethylbenzene	<0.000670		mg/kg wet	9082671	9082671-BLK1	08/14/09 18:59
Naphthalene	<0.00170		mg/kg wet	9082671	9082671-BLK1	08/14/09 18:59
Toluene	<0.000400		mg/kg wet	9082671	9082671-BLK1	08/14/09 18:59
Xylenes, total	<0.00130		mg/kg wet	9082671	9082671-BLK1	08/14/09 18:59
Surrogate: 1,2-Dichloroethane-d4	99%			9082671	9082671-BLK1	08/14/09 18:59
Surrogate: Dibromofluoromethane	95%			9082671	9082671-BLK1	08/14/09 18:59
Surrogate: Toluene-d8	95%			9082671	9082671-BLK1	08/14/09 18:59
Surrogate: 4-Bromofluorobenzene	95%			9082671	9082671-BLK1	08/14/09 18:59

9082672-BLK1

Benzene	<0.000670		mg/kg wet	9082672	9082672-BLK1	08/17/09 14:31
Ethylbenzene	<0.000670		mg/kg wet	9082672	9082672-BLK1	08/17/09 14:31
Naphthalene	<0.00170		mg/kg wet	9082672	9082672-BLK1	08/17/09 14:31
Toluene	<0.000400		mg/kg wet	9082672	9082672-BLK1	08/17/09 14:31
Xylenes, total	<0.00130		mg/kg wet	9082672	9082672-BLK1	08/17/09 14:31
Surrogate: 1,2-Dichloroethane-d4	106%			9082672	9082672-BLK1	08/17/09 14:31
Surrogate: Dibromofluoromethane	101%			9082672	9082672-BLK1	08/17/09 14:31
Surrogate: Toluene-d8	94%			9082672	9082672-BLK1	08/17/09 14:31
Surrogate: 4-Bromofluorobenzene	94%			9082672	9082672-BLK1	08/17/09 14:31

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA
Blank - Cont.

Analyte	Blank Value	Q	Units	Q.C. Batch	Lab Number	Analyzed Date/Time
---------	-------------	---	-------	------------	------------	--------------------

Selected Volatile Organic Compounds by EPA Method 8260B

Polyaromatic Hydrocarbons by EPA 8270D

9081773-BLK1

Acenaphthene	<0.0320		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Acenaphthylene	<0.0310		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Anthracene	<0.0330		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Benzo (a) anthracene	<0.0380		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Benzo (a) pyrene	<0.0300		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Benzo (b) fluoranthene	<0.0300		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Benzo (g,h,i) perylene	<0.0300		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Benzo (k) fluoranthene	<0.0300		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Chrysene	<0.0400		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Dibenz (a,h) anthracene	<0.0310		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Fluoranthene	<0.0340		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Fluorene	<0.0360		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Indeno (1,2,3-cd) pyrene	<0.0310		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Naphthalene	<0.0410		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Phenanthrene	<0.0340		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Pyrene	<0.0410		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
1-Methylnaphthalene	<0.0320		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
2-Methylnaphthalene	<0.0330		mg/kg wet	9081773	9081773-BLK1	08/14/09 15:30
Surrogate: Terphenyl-d14	96%			9081773	9081773-BLK1	08/14/09 15:30
Surrogate: 2-Fluorobiphenyl	81%			9081773	9081773-BLK1	08/14/09 15:30
Surrogate: Nitrobenzene-d5	86%			9081773	9081773-BLK1	08/14/09 15:30

9082723-BLK1

Acenaphthene	<0.0320		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Acenaphthylene	<0.0310		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Anthracene	<0.0330		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Benzo (a) anthracene	<0.0380		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Benzo (a) pyrene	<0.0300		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Benzo (b) fluoranthene	<0.0300		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Benzo (g,h,i) perylene	<0.0300		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Benzo (k) fluoranthene	<0.0300		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Chrysene	<0.0400		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Dibenz (a,h) anthracene	<0.0310		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Fluoranthene	<0.0340		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Fluorene	<0.0360		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Indeno (1,2,3-cd) pyrene	<0.0310		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Naphthalene	<0.0410		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Phenanthrene	<0.0340		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Pyrene	<0.0410		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA
Blank - Cont.

Analyte	Blank Value	Q	Units	Q.C. Batch	Lab Number	Analyzed Date/Time
Polyaromatic Hydrocarbons by EPA 8270D						
9082723-BLK1						
1-Methylnaphthalene	<0.0320		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
2-Methylnaphthalene	<0.0330		mg/kg wet	9082723	9082723-BLK1	08/19/09 02:02
Surrogate: Terphenyl-d14	78%			9082723	9082723-BLK1	08/19/09 02:02
Surrogate: 2-Fluorobiphenyl	70%			9082723	9082723-BLK1	08/19/09 02:02
Surrogate: Nitrobenzene-d5	81%			9082723	9082723-BLK1	08/19/09 02:02

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwec

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA
Duplicate

Analyte	Orig. Val.	Duplicate	Q	Units	RPD	Limit	Batch	Sample Duplicated	% Rec.	Analyzed Date/Time
General Chemistry Parameters										
9082732-DUP1										
% Dry Solids	81.6	82.7		%	1	20	9082732	NSH0575-08		08/19/09 10:43
9082734-DUP1										
% Dry Solids	85.5	85.8		%	0.4	20	9082734	NSH1273-05		08/19/09 14:20

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwce

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA LCS

Analyte	Known Val.	Analyzed Val	Q	Units	% Rec.	Target Range	Batch	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B								
9081164-BS1								
Benzene	50.0	50.8		ug/kg	102%	78 - 126	9081164	08/13/09 12:19
Ethylbenzene	50.0	51.8		ug/kg	104%	79 - 130	9081164	08/13/09 12:19
Naphthalene	50.0	52.5		ug/kg	105%	72 - 150	9081164	08/13/09 12:19
Toluene	50.0	49.4		ug/kg	99%	76 - 126	9081164	08/13/09 12:19
Xylenes, total	150	157		ug/kg	105%	80 - 130	9081164	08/13/09 12:19
Surrogate: 1,2-Dichloroethane-d4	50.0	52.5			105%	67 - 138	9081164	08/13/09 12:19
Surrogate: Dibromofluoromethane	50.0	50.2			100%	75 - 125	9081164	08/13/09 12:19
Surrogate: Toluene-d8	50.0	49.2			98%	76 - 129	9081164	08/13/09 12:19
Surrogate: 4-Bromofluorobenzene	50.0	49.0			98%	67 - 147	9081164	08/13/09 12:19
9081749-BS1								
Benzene	50.0	42.4		ug/kg	85%	78 - 126	9081749	08/18/09 12:30
Ethylbenzene	50.0	48.8		ug/kg	98%	79 - 130	9081749	08/18/09 12:30
Naphthalene	50.0	53.0		ug/kg	106%	72 - 150	9081749	08/18/09 12:30
Toluene	50.0	47.6		ug/kg	95%	76 - 126	9081749	08/18/09 12:30
Xylenes, total	150	149		ug/kg	99%	80 - 130	9081749	08/18/09 12:30
Surrogate: 1,2-Dichloroethane-d4	25.0	23.2			93%	67 - 138	9081749	08/18/09 12:30
Surrogate: Dibromofluoromethane	25.0	24.7			99%	75 - 125	9081749	08/18/09 12:30
Surrogate: Toluene-d8	25.0	26.5			106%	76 - 129	9081749	08/18/09 12:30
Surrogate: 4-Bromofluorobenzene	25.0	22.2			89%	67 - 147	9081749	08/18/09 12:30
9082671-BS1								
Benzene	50.0	49.9		ug/kg	100%	78 - 126	9082671	08/14/09 16:59
Ethylbenzene	50.0	52.1		ug/kg	104%	79 - 130	9082671	08/14/09 16:59
Naphthalene	50.0	55.7		ug/kg	111%	72 - 150	9082671	08/14/09 16:59
Toluene	50.0	50.1		ug/kg	100%	76 - 126	9082671	08/14/09 16:59
Xylenes, total	150	155		ug/kg	104%	80 - 130	9082671	08/14/09 16:59
Surrogate: 1,2-Dichloroethane-d4	50.0	51.6			103%	67 - 138	9082671	08/14/09 16:59
Surrogate: Dibromofluoromethane	50.0	50.5			101%	75 - 125	9082671	08/14/09 16:59
Surrogate: Toluene-d8	50.0	50.0			100%	76 - 129	9082671	08/14/09 16:59
Surrogate: 4-Bromofluorobenzene	50.0	50.5			101%	67 - 147	9082671	08/14/09 16:59
9082672-BS1								
Benzene	50.0	55.8		ug/kg	112%	78 - 126	9082672	08/17/09 12:30
Ethylbenzene	50.0	53.9		ug/kg	108%	79 - 130	9082672	08/17/09 12:30
Naphthalene	50.0	59.8		ug/kg	120%	72 - 150	9082672	08/17/09 12:30
Toluene	50.0	52.1		ug/kg	104%	76 - 126	9082672	08/17/09 12:30
Xylenes, total	150	163		ug/kg	109%	80 - 130	9082672	08/17/09 12:30
Surrogate: 1,2-Dichloroethane-d4	50.0	55.2			110%	67 - 138	9082672	08/17/09 12:30
Surrogate: Dibromofluoromethane	50.0	54.5			109%	75 - 125	9082672	08/17/09 12:30
Surrogate: Toluene-d8	50.0	49.2			98%	76 - 129	9082672	08/17/09 12:30
Surrogate: 4-Bromofluorobenzene	50.0	50.2			100%	67 - 147	9082672	08/17/09 12:30

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA
LCS - Cont.

Analyte	Known Val.	Analyzed Val	Q	Units	% Rec.	Target Range	Batch	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B								
Polyaromatic Hydrocarbons by EPA 8270D								
9081773-BS1								
Acenaphthene	1.67	1.43		mg/kg wet	86%	49 - 120	9081773	08/14/09 15:53
Acenaphthylene	1.67	1.49		mg/kg wet	90%	52 - 120	9081773	08/14/09 15:53
Anthracene	1.67	1.71		mg/kg wet	103%	58 - 120	9081773	08/14/09 15:53
Benzo (a) anthracene	1.67	1.62		mg/kg wet	97%	57 - 120	9081773	08/14/09 15:53
Benzo (a) pyrene	1.67	1.70		mg/kg wet	102%	55 - 120	9081773	08/14/09 15:53
Benzo (b) fluoranthene	1.67	1.82		mg/kg wet	109%	51 - 123	9081773	08/14/09 15:53
Benzo (g,h,i) perylene	1.67	1.53		mg/kg wet	92%	49 - 121	9081773	08/14/09 15:53
Benzo (k) fluoranthene	1.67	1.44		mg/kg wet	86%	42 - 129	9081773	08/14/09 15:53
Chrysene	1.67	1.56		mg/kg wet	94%	55 - 120	9081773	08/14/09 15:53
Dibenz (a,h) anthracene	1.67	1.60		mg/kg wet	96%	50 - 123	9081773	08/14/09 15:53
Fluoranthene	1.67	1.54		mg/kg wet	93%	58 - 120	9081773	08/14/09 15:53
Fluorene	1.67	1.44		mg/kg wet	86%	54 - 120	9081773	08/14/09 15:53
Indeno (1,2,3-cd) pyrene	1.67	1.59		mg/kg wet	95%	50 - 122	9081773	08/14/09 15:53
Naphthalene	1.67	1.22		mg/kg wet	73%	28 - 120	9081773	08/14/09 15:53
Phenanthrene	1.67	1.52		mg/kg wet	91%	56 - 120	9081773	08/14/09 15:53
Pyrene	1.67	1.70		mg/kg wet	102%	56 - 120	9081773	08/14/09 15:53
1-Methylnaphthalene	1.67	1.21		mg/kg wet	73%	36 - 120	9081773	08/14/09 15:53
2-Methylnaphthalene	1.67	1.23		mg/kg wet	74%	36 - 120	9081773	08/14/09 15:53
Surrogate: Terphenyl-d14	1.67	1.66			99%	18 - 120	9081773	08/14/09 15:53
Surrogate: 2-Fluorobiphenyl	1.67	1.38			83%	14 - 120	9081773	08/14/09 15:53
Surrogate: Nitrobenzene-d5	1.67	1.37			82%	17 - 120	9081773	08/14/09 15:53
9082723-BS1								
Acenaphthene	1.67	1.16		mg/kg wet	70%	49 - 120	9082723	08/19/09 02:26
Acenaphthylene	1.67	1.18		mg/kg wet	71%	52 - 120	9082723	08/19/09 02:26
Anthracene	1.67	1.43		mg/kg wet	86%	58 - 120	9082723	08/19/09 02:26
Benzo (a) anthracene	1.67	1.36		mg/kg wet	82%	57 - 120	9082723	08/19/09 02:26
Benzo (a) pyrene	1.67	1.39		mg/kg wet	83%	55 - 120	9082723	08/19/09 02:26
Benzo (b) fluoranthene	1.67	1.47		mg/kg wet	88%	51 - 123	9082723	08/19/09 02:26
Benzo (g,h,i) perylene	1.67	1.29		mg/kg wet	77%	49 - 121	9082723	08/19/09 02:26
Benzo (k) fluoranthene	1.67	1.17		mg/kg wet	70%	42 - 129	9082723	08/19/09 02:26
Chrysene	1.67	1.30		mg/kg wet	78%	55 - 120	9082723	08/19/09 02:26
Dibenz (a,h) anthracene	1.67	1.35		mg/kg wet	81%	50 - 123	9082723	08/19/09 02:26
Fluoranthene	1.67	1.35		mg/kg wet	81%	58 - 120	9082723	08/19/09 02:26
Fluorene	1.67	1.23		mg/kg wet	74%	54 - 120	9082723	08/19/09 02:26
Indeno (1,2,3-cd) pyrene	1.67	1.34		mg/kg wet	81%	50 - 122	9082723	08/19/09 02:26
Naphthalene	1.67	0.977		mg/kg wet	59%	28 - 120	9082723	08/19/09 02:26
Phenanthrene	1.67	1.28		mg/kg wet	77%	56 - 120	9082723	08/19/09 02:26
Pyrene	1.67	1.39		mg/kg wet	84%	56 - 120	9082723	08/19/09 02:26

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA
LCS - Cont.

Analyte	Known Val.	Analyzed Val	Q	Units	% Rec.	Target Range	Batch	Analyzed Date/Time
Polyaromatic Hydrocarbons by EPA 8270D								
9082723-BS1								
1-Methylnaphthalene	1.67	0.964		mg/kg wet	58%	36 - 120	9082723	08/19/09 02:26
2-Methylnaphthalene	1.67	1.01		mg/kg wet	61%	36 - 120	9082723	08/19/09 02:26
Surrogate: Terphenyl-d14	1.67	1.27			76%	18 - 120	9082723	08/19/09 02:26
Surrogate: 2-Fluorobiphenyl	1.67	1.02			61%	14 - 120	9082723	08/19/09 02:26
Surrogate: Nitrobenzene-d5	1.67	1.11			67%	17 - 120	9082723	08/19/09 02:26

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA

LCS Dup

Analyte	Orig. Val.	Duplicate	Q	Units	Spike Conc	% Rec.	Target Range	RPD	Limit	Batch	Sample Duplicated	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B												
9081164-BSD1												
Benzene		51.1		ug/kg	50.0	102%	78 - 126	0.5	50	9081164		08/13/09 12:49
Ethylbenzene		51.7		ug/kg	50.0	103%	79 - 130	0.08	50	9081164		08/13/09 12:49
Naphthalene		53.2		ug/kg	50.0	106%	72 - 150	1	50	9081164		08/13/09 12:49
Toluene		49.0		ug/kg	50.0	98%	76 - 126	0.8	50	9081164		08/13/09 12:49
Xylenes, total		156		ug/kg	150	104%	80 - 130	0.8	50	9081164		08/13/09 12:49
Surrogate: 1,2-Dichloroethane-d4		51.2		ug/kg	50.0	102%	67 - 138			9081164		08/13/09 12:49
Surrogate: Dibromofluoromethane		50.6		ug/kg	50.0	101%	75 - 125			9081164		08/13/09 12:49
Surrogate: Toluene-d8		48.7		ug/kg	50.0	97%	76 - 129			9081164		08/13/09 12:49
Surrogate: 4-Bromofluorobenzene		48.7		ug/kg	50.0	97%	67 - 147			9081164		08/13/09 12:49
9081749-BSD1												
Benzene		41.8		ug/kg	50.0	84%	78 - 126	1	50	9081749		08/18/09 12:58
Ethylbenzene		47.8		ug/kg	50.0	96%	79 - 130	2	50	9081749		08/18/09 12:58
Naphthalene		55.1		ug/kg	50.0	110%	72 - 150	4	50	9081749		08/18/09 12:58
Toluene		47.2		ug/kg	50.0	94%	76 - 126	1	50	9081749		08/18/09 12:58
Xylenes, total		145		ug/kg	150	97%	80 - 130	2	50	9081749		08/18/09 12:58
Surrogate: 1,2-Dichloroethane-d4		23.2		ug/kg	25.0	93%	67 - 138			9081749		08/18/09 12:58
Surrogate: Dibromofluoromethane		24.3		ug/kg	25.0	97%	75 - 125			9081749		08/18/09 12:58
Surrogate: Toluene-d8		26.7		ug/kg	25.0	107%	76 - 129			9081749		08/18/09 12:58
Surrogate: 4-Bromofluorobenzene		23.0		ug/kg	25.0	92%	67 - 147			9081749		08/18/09 12:58
9082671-BSD1												
Benzene		49.0		ug/kg	50.0	98%	78 - 126	2	50	9082671		08/14/09 17:29
Ethylbenzene		50.4		ug/kg	50.0	101%	79 - 130	3	50	9082671		08/14/09 17:29
Naphthalene		53.7		ug/kg	50.0	107%	72 - 150	4	50	9082671		08/14/09 17:29
Toluene		48.7		ug/kg	50.0	97%	76 - 126	3	50	9082671		08/14/09 17:29
Xylenes, total		151		ug/kg	150	101%	80 - 130	3	50	9082671		08/14/09 17:29
Surrogate: 1,2-Dichloroethane-d4		51.5		ug/kg	50.0	103%	67 - 138			9082671		08/14/09 17:29
Surrogate: Dibromofluoromethane		49.6		ug/kg	50.0	99%	75 - 125			9082671		08/14/09 17:29
Surrogate: Toluene-d8		49.7		ug/kg	50.0	99%	76 - 129			9082671		08/14/09 17:29
Surrogate: 4-Bromofluorobenzene		49.4		ug/kg	50.0	99%	67 - 147			9082671		08/14/09 17:29
9082672-BSD1												
Benzene		51.7		ug/kg	50.0	103%	78 - 126	8	50	9082672		08/17/09 13:00
Ethylbenzene		51.7		ug/kg	50.0	103%	79 - 130	4	50	9082672		08/17/09 13:00
Naphthalene		57.7		ug/kg	50.0	115%	72 - 150	4	50	9082672		08/17/09 13:00
Toluene		50.2		ug/kg	50.0	100%	76 - 126	4	50	9082672		08/17/09 13:00
Xylenes, total		155		ug/kg	150	103%	80 - 130	5	50	9082672		08/17/09 13:00
Surrogate: 1,2-Dichloroethane-d4		51.2		ug/kg	50.0	102%	67 - 138			9082672		08/17/09 13:00
Surrogate: Dibromofluoromethane		52.0		ug/kg	50.0	104%	75 - 125			9082672		08/17/09 13:00
Surrogate: Toluene-d8		48.7		ug/kg	50.0	97%	76 - 129			9082672		08/17/09 13:00

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwce

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA
LCS Dup - Cont.

Analyte	Orig. Val.	Duplicate	Q	Units	Spike Conc	% Rec.	Target Range	RPD	Limit	Batch	Sample Duplicated	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B												
9082672-BSD1												
<i>Surrogate: 4-Bromofluorobenzene</i>		47.8		ug/kg	50.0	96%	67 - 147			9082672		08/17/09 13:00
Polyaromatic Hydrocarbons by EPA 8270D												
9081773-BSD1												
Acenaphthene		1.81		mg/kg wet	1.67	108%	49 - 120	23	40	9081773		08/14/09 16:16
Acenaphthylene		1.90		mg/kg wet	1.67	114%	52 - 120	24	30	9081773		08/14/09 16:16
Anthracene		2.08	L	mg/kg wet	1.67	125%	58 - 120	20	50	9081773		08/14/09 16:16
Benzo (a) anthracene		1.98		mg/kg wet	1.67	119%	57 - 120	20	30	9081773		08/14/09 16:16
Benzo (a) pyrene		2.09	L	mg/kg wet	1.67	125%	55 - 120	20	33	9081773		08/14/09 16:16
Benzo (b) fluoranthene		1.98		mg/kg wet	1.67	119%	51 - 123	9	42	9081773		08/14/09 16:16
Benzo (g,h,i) perylene		1.90		mg/kg wet	1.67	114%	49 - 121	22	32	9081773		08/14/09 16:16
Benzo (k) fluoranthene		1.97		mg/kg wet	1.67	118%	42 - 129	31	39	9081773		08/14/09 16:16
Chrysene		1.93		mg/kg wet	1.67	116%	55 - 120	21	34	9081773		08/14/09 16:16
Dibenz (a,h) anthracene		1.94		mg/kg wet	1.67	117%	50 - 123	19	31	9081773		08/14/09 16:16
Fluoranthene		1.86		mg/kg wet	1.67	112%	58 - 120	19	35	9081773		08/14/09 16:16
Fluorene		1.85		mg/kg wet	1.67	111%	54 - 120	25	37	9081773		08/14/09 16:16
Indeno (1,2,3-cd) pyrene		1.91		mg/kg wet	1.67	115%	50 - 122	19	32	9081773		08/14/09 16:16
Naphthalene		1.47		mg/kg wet	1.67	88%	28 - 120	18	34	9081773		08/14/09 16:16
Phenanthrene		1.87		mg/kg wet	1.67	112%	56 - 120	21	32	9081773		08/14/09 16:16
Pyrene		2.08	L	mg/kg wet	1.67	124%	56 - 120	20	40	9081773		08/14/09 16:16
1-Methylnaphthalene		1.49		mg/kg wet	1.67	89%	36 - 120	21	45	9081773		08/14/09 16:16
2-Methylnaphthalene		1.52		mg/kg wet	1.67	91%	36 - 120	21	50	9081773		08/14/09 16:16
<i>Surrogate: Terphenyl-d14</i>		1.94		mg/kg wet	1.67	116%	18 - 120			9081773		08/14/09 16:16
<i>Surrogate: 2-Fluorobiphenyl</i>		1.67		mg/kg wet	1.67	100%	14 - 120			9081773		08/14/09 16:16
<i>Surrogate: Nitrobenzene-d5</i>		1.54		mg/kg wet	1.67	93%	17 - 120			9081773		08/14/09 16:16

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA

Matrix Spike

Analyte	Orig. Val.	MS Val	Q	Units	Spike Conc	% Rec.	Target Range	Batch	Sample Spiked	Analyzed Date/Time
Polyaromatic Hydrocarbons by EPA 8270D										
9081773-MS1										
Acenaphthene	ND	1.74		mg/kg dry	1.77	98%	42 - 120	9081773	NSG2706-01	08/14/09 16:40
Acenaphthylene	ND	1.75		mg/kg dry	1.77	99%	32 - 120	9081773	NSG2706-01	08/14/09 16:40
Anthracene	ND	1.92		mg/kg dry	1.77	108%	10 - 200	9081773	NSG2706-01	08/14/09 16:40
Benzo (a) anthracene	ND	1.78		mg/kg dry	1.77	100%	41 - 120	9081773	NSG2706-01	08/14/09 16:40
Benzo (a) pyrene	ND	1.90		mg/kg dry	1.77	107%	33 - 121	9081773	NSG2706-01	08/14/09 16:40
Benzo (b) fluoranthene	ND	1.89		mg/kg dry	1.77	107%	26 - 137	9081773	NSG2706-01	08/14/09 16:40
Benzo (g,h,i) perylene	ND	1.71		mg/kg dry	1.77	96%	21 - 124	9081773	NSG2706-01	08/14/09 16:40
Benzo (k) fluoranthene	ND	1.76		mg/kg dry	1.77	99%	14 - 140	9081773	NSG2706-01	08/14/09 16:40
Chrysene	ND	1.74		mg/kg dry	1.77	98%	28 - 123	9081773	NSG2706-01	08/14/09 16:40
Dibenz (a,h) anthracene	ND	1.81		mg/kg dry	1.77	102%	25 - 127	9081773	NSG2706-01	08/14/09 16:40
Fluoranthene	ND	1.72		mg/kg dry	1.77	97%	38 - 120	9081773	NSG2706-01	08/14/09 16:40
Fluorene	ND	1.71		mg/kg dry	1.77	96%	41 - 120	9081773	NSG2706-01	08/14/09 16:40
Indeno (1,2,3-cd) pyrene	ND	1.80		mg/kg dry	1.77	101%	25 - 123	9081773	NSG2706-01	08/14/09 16:40
Naphthalene	ND	1.40		mg/kg dry	1.77	79%	25 - 120	9081773	NSG2706-01	08/14/09 16:40
Phenanthrene	ND	1.74		mg/kg dry	1.77	98%	37 - 120	9081773	NSG2706-01	08/14/09 16:40
Pyrene	ND	1.91		mg/kg dry	1.77	108%	29 - 125	9081773	NSG2706-01	08/14/09 16:40
1-Methylnaphthalene	ND	1.41		mg/kg dry	1.77	80%	19 - 120	9081773	NSG2706-01	08/14/09 16:40
2-Methylnaphthalene	ND	1.45		mg/kg dry	1.77	82%	11 - 120	9081773	NSG2706-01	08/14/09 16:40
Surrogate: Terphenyl-d14		1.77		mg/kg dry	1.77	100%	18 - 120	9081773	NSG2706-01	08/14/09 16:40
Surrogate: 2-Fluorobiphenyl		1.44		mg/kg dry	1.77	81%	14 - 120	9081773	NSG2706-01	08/14/09 16:40
Surrogate: Nitrobenzene-d5		1.39		mg/kg dry	1.77	78%	17 - 120	9081773	NSG2706-01	08/14/09 16:40
9082723-MS1										
Acenaphthene	ND	1.52		mg/kg dry	2.01	76%	42 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Acenaphthylene	ND	1.51		mg/kg dry	2.01	75%	32 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Anthracene	ND	1.78		mg/kg dry	2.01	89%	10 - 200	9082723	NSH0575-02RE 1	08/19/09 02:50
Benzo (a) anthracene	ND	1.76		mg/kg dry	2.01	88%	41 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Benzo (a) pyrene	ND	1.71		mg/kg dry	2.01	85%	33 - 121	9082723	NSH0575-02RE 1	08/19/09 02:50
Benzo (b) fluoranthene	ND	1.74		mg/kg dry	2.01	87%	26 - 137	9082723	NSH0575-02RE 1	08/19/09 02:50
Benzo (g,h,i) perylene	ND	1.56		mg/kg dry	2.01	78%	21 - 124	9082723	NSH0575-02RE 1	08/19/09 02:50
Benzo (k) fluoranthene	ND	1.53		mg/kg dry	2.01	76%	14 - 140	9082723	NSH0575-02RE 1	08/19/09 02:50
Chrysene	ND	1.66		mg/kg dry	2.01	83%	28 - 123	9082723	NSH0575-02RE 1	08/19/09 02:50

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA
Matrix Spike - Cont.

Analyte	Orig. Val.	MS Val	Q	Units	Spike Conc	% Rec.	Target Range	Batch	Sample Spiked	Analyzed Date/Time
Polyaromatic Hydrocarbons by EPA 8270D										
9082723-MS1										
Dibenz (a,h) anthracene	ND	1.64		mg/kg dry	2.01	82%	25 - 127	9082723	NSH0575-02RE 1	08/19/09 02:50
Fluoranthene	0.134	1.83		mg/kg dry	2.01	84%	38 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Fluorene	ND	1.62		mg/kg dry	2.01	81%	41 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Indeno (1,2,3-cd) pyrene	ND	1.66		mg/kg dry	2.01	83%	25 - 123	9082723	NSH0575-02RE 1	08/19/09 02:50
Naphthalene	ND	1.28		mg/kg dry	2.01	64%	25 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Phenanthrene	0.138	1.85		mg/kg dry	2.01	85%	37 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Pyrene	0.154	1.87		mg/kg dry	2.01	85%	29 - 125	9082723	NSH0575-02RE 1	08/19/09 02:50
1-Methylnaphthalene	0.0997	1.45		mg/kg dry	2.01	67%	19 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
2-Methylnaphthalene	0.125	1.59		mg/kg dry	2.01	73%	11 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Surrogate: Terphenyl-d14		1.52		mg/kg dry	2.01	76%	18 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Surrogate: 2-Fluorobiphenyl		1.25		mg/kg dry	2.01	62%	14 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50
Surrogate: Nitrobenzene-d5		1.30		mg/kg dry	2.01	65%	17 - 120	9082723	NSH0575-02RE 1	08/19/09 02:50

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA

Matrix Spike Dup

Analyte	Orig. Val.	Duplicate	Q	Units	Spike Conc	% Rec.	Target Range	RPD	Limit	Batch	Sample Duplicated	Analyzed Date/Time
Polyaromatic Hydrocarbons by EPA 8270D												
9081773-MSD1												
Acenaphthene	ND	1.71		mg/kg dry	1.82	94%	42 - 120	2	40	9081773	NSG2706-01	08/14/09 17:03
Acenaphthylene	ND	1.75		mg/kg dry	1.82	96%	32 - 120	0.1	30	9081773	NSG2706-01	08/14/09 17:03
Anthracene	ND	1.91		mg/kg dry	1.82	105%	10 - 200	0.4	50	9081773	NSG2706-01	08/14/09 17:03
Benzo (a) anthracene	ND	1.82		mg/kg dry	1.82	100%	41 - 120	2	30	9081773	NSG2706-01	08/14/09 17:03
Benzo (a) pyrene	ND	1.87		mg/kg dry	1.82	102%	33 - 121	2	33	9081773	NSG2706-01	08/14/09 17:03
Benzo (b) fluoranthene	ND	2.03		mg/kg dry	1.82	111%	26 - 137	7	42	9081773	NSG2706-01	08/14/09 17:03
Benzo (g,h,i) perylene	ND	1.74		mg/kg dry	1.82	95%	21 - 124	2	32	9081773	NSG2706-01	08/14/09 17:03
Benzo (k) fluoranthene	ND	1.59		mg/kg dry	1.82	87%	14 - 140	10	39	9081773	NSG2706-01	08/14/09 17:03
Chrysene	ND	1.73		mg/kg dry	1.82	95%	28 - 123	0.5	34	9081773	NSG2706-01	08/14/09 17:03
Dibenz (a,h) anthracene	ND	1.82		mg/kg dry	1.82	100%	25 - 127	0.6	31	9081773	NSG2706-01	08/14/09 17:03
Fluoranthene	ND	1.72		mg/kg dry	1.82	94%	38 - 120	0.06	35	9081773	NSG2706-01	08/14/09 17:03
Fluorene	ND	1.72		mg/kg dry	1.82	94%	41 - 120	0.8	37	9081773	NSG2706-01	08/14/09 17:03
Indeno (1,2,3-cd) pyrene	ND	1.78		mg/kg dry	1.82	98%	25 - 123	1	32	9081773	NSG2706-01	08/14/09 17:03
Naphthalene	ND	1.36		mg/kg dry	1.82	75%	25 - 120	3	42	9081773	NSG2706-01	08/14/09 17:03
Phenanthrene	ND	1.71		mg/kg dry	1.82	94%	37 - 120	2	32	9081773	NSG2706-01	08/14/09 17:03
Pyrene	ND	1.90		mg/kg dry	1.82	104%	29 - 125	0.6	40	9081773	NSG2706-01	08/14/09 17:03
1-Methylnaphthalene	ND	1.40		mg/kg dry	1.82	77%	19 - 120	0.9	45	9081773	NSG2706-01	08/14/09 17:03
2-Methylnaphthalene	ND	1.41		mg/kg dry	1.82	77%	11 - 120	3	50	9081773	NSG2706-01	08/14/09 17:03
Surrogate: Terphenyl-d14		1.78		mg/kg dry	1.82	98%	18 - 120			9081773	NSG2706-01	08/14/09 17:03
Surrogate: 2-Fluorobiphenyl		1.42		mg/kg dry	1.82	78%	14 - 120			9081773	NSG2706-01	08/14/09 17:03
Surrogate: Nitrobenzene-d5		1.39		mg/kg dry	1.82	76%	17 - 120			9081773	NSG2706-01	08/14/09 17:03
9082723-MSD1												
Acenaphthene	ND	1.45		mg/kg dry	1.99	73%	42 - 120	5	40	9082723	NSH0575-02R E1	08/19/09 03:14
Acenaphthylene	ND	1.47		mg/kg dry	1.99	74%	32 - 120	3	30	9082723	NSH0575-02R E1	08/19/09 03:14
Anthracene	ND	1.67		mg/kg dry	1.99	84%	10 - 200	7	50	9082723	NSH0575-02R E1	08/19/09 03:14
Benzo (a) anthracene	ND	1.57		mg/kg dry	1.99	79%	41 - 120	11	30	9082723	NSH0575-02R E1	08/19/09 03:14
Benzo (a) pyrene	ND	1.59		mg/kg dry	1.99	80%	33 - 121	7	33	9082723	NSH0575-02R E1	08/19/09 03:14
Benzo (b) fluoranthene	ND	1.64		mg/kg dry	1.99	82%	26 - 137	6	42	9082723	NSH0575-02R E1	08/19/09 03:14
Benzo (g,h,i) perylene	ND	1.50		mg/kg dry	1.99	75%	21 - 124	4	32	9082723	NSH0575-02R E1	08/19/09 03:14
Benzo (k) fluoranthene	ND	1.42		mg/kg dry	1.99	71%	14 - 140	7	39	9082723	NSH0575-02R E1	08/19/09 03:14
Chrysene	ND	1.50		mg/kg dry	1.99	75%	28 - 123	10	34	9082723	NSH0575-02R E1	08/19/09 03:14
Dibenz (a,h) anthracene	ND	1.55		mg/kg dry	1.99	78%	25 - 127	5	31	9082723	NSH0575-02R E1	08/19/09 03:14
Fluoranthene	0.134	1.67		mg/kg dry	1.99	77%	38 - 120	9	35	9082723	NSH0575-02R E1	08/19/09 03:14

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwce

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

PROJECT QUALITY CONTROL DATA

Matrix Spike Dup - Cont.

Analyte	Orig. Val.	Duplicate	Q	Units	Spike Conc	% Rec.	Target Range	RPD	Limit	Batch	Sample Duplicated	Analyzed Date/Time
Polyaromatic Hydrocarbons by EPA 8270D												
9082723-MSD1												
Fluorene	ND	1.53		mg/kg dry	1.99	77%	41 - 120	6	37	9082723	NSH0575-02R E1	08/19/09 03:14
Indeno (1,2,3-cd) pyrene	ND	1.53		mg/kg dry	1.99	77%	25 - 123	8	32	9082723	NSH0575-02R E1	08/19/09 03:14
Naphthalene	ND	1.13		mg/kg dry	1.99	57%	25 - 120	13	42	9082723	NSH0575-02R E1	08/19/09 03:14
Phenanthrene	0.138	1.66		mg/kg dry	1.99	77%	37 - 120	11	32	9082723	NSH0575-02R E1	08/19/09 03:14
Pyrene	0.154	1.77		mg/kg dry	1.99	81%	29 - 125	5	40	9082723	NSH0575-02R E1	08/19/09 03:14
1-Methylnaphthalene	0.0997	1.25		mg/kg dry	1.99	58%	19 - 120	15	45	9082723	NSH0575-02R E1	08/19/09 03:14
2-Methylnaphthalene	0.125	1.32		mg/kg dry	1.99	60%	11 - 120	19	50	9082723	NSH0575-02R E1	08/19/09 03:14
Surrogate: Terphenyl-d14		1.51		mg/kg dry	1.99	76%	18 - 120			9082723	NSH0575-02R E1	08/19/09 03:14
Surrogate: 2-Fluorobiphenyl		1.22		mg/kg dry	1.99	61%	14 - 120			9082723	NSH0575-02R E1	08/19/09 03:14
Surrogate: Nitrobenzene-d5		1.25		mg/kg dry	1.99	63%	17 - 120			9082723	NSH0575-02R E1	08/19/09 03:14

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

CERTIFICATION SUMMARY

TestAmerica Nashville

Method	Matrix	AIHA	Nelac	South Carolina
SW846 8260B	Soil	N/A	X	X
SW846 8270D	Soil		X	X
SW-846	Soil			

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee


Work Order: NSH0575
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 08/07/09 08:00

DATA QUALIFIERS AND DEFINITIONS

B Analyte was detected in the associated Method Blank.
CF2 Confirmatory analysis was past holding time.
CF6 Results confirmed by reanalysis.
J Analyte detected at a level less than the Reporting Limit (RL) and greater than or equal to the Method Detection Limit (MDL). Concentrations within this range are estimated.
L Laboratory Control Sample and/or Laboratory Control Sample Duplicate recovery was above the acceptance limits. Analyte not detected, data not impacted.
L1 Laboratory Control Sample and/or Laboratory Control Sample Duplicate recovery was above acceptance limits.
RL1 Reporting limit raised due to sample matrix effects.
ZX Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.
ND Not detected at the reporting limit (or method detection limit if shown)

METHOD MODIFICATION NOTES

COOLER RECEIPT



NSH0575

Cooler Received/Opened On 08/07/09 @ 08:00

1. Tracking # 5268 (last 4 digits, FedE.)

Courier: FED-EX IR Gun ID 97310166

2. Temperature of rep. sample or temp blank when opened: 3.4 Degrees Celsius

3. If Item #2 temperature is 0°C or less, was the representative sample or temp blank frozen? YES NO...NA

4. Were custody seals on outside of cooler? YES...NO...NA

If yes, how many and where: 1-BACK: 1-FRONT

5. Were the seals intact, signed, and dated correctly? YES...NO...NA

6. Were custody papers inside cooler? YES...NO...NA

I certify that I opened the cooler and answered questions 1-6 (initial) [Signature]

7. Were custody seals on containers: YES NO and intact YES...NO...NA

Were these signed and dated correctly? YES...NO...NA

8. Packing mat'l used? Bubblewrap Plastic bag Peanuts Vermiculite Foam Insert Paper Other None

9. Cooling process: Ice Ice-pack Ice (direct contact) Dry Ice Other None

10. Did all containers arrive in good condition (unbroken)? YES...NO...NA

11. Were all container labels complete (#, date, signed, pres., etc)? YES...NO...NA

12. Did all container labels and tags agree with custody papers? YES...NO...NA

13a. Were VOA vials received? YES...NO...NA

b. Was there any observable headspace present in any VOA vial? YES...NO...NA

14. Was there a Trip Blank in this cooler? YES...NO...NA If multiple coolers, sequence #

I certify that I unloaded the cooler and answered questions 7-14 (initial) [Signature]

15a. On pres'd bottles, did pH test strips suggest preservation reached the correct pH level? YES...NO...NA

b. Did the bottle labels indicate that the correct preservatives were used YES...NO...NA

16. Was residual chlorine present? YES...NO...NA

I certify that I checked for chlorine and pH as per SOP and answered questions 15-16 (initial) [Signature]

17. Were custody papers properly filled out (ink, signed, etc)? YES...NO...NA

18. Did you sign the custody papers in the appropriate place? YES...NO...NA

19. Were correct containers used for the analysis requested? YES...NO...NA

20. Was sufficient amount of sample sent in each container? YES...NO...NA

I certify that I entered this project into LIMS and answered questions 17-20 (initial) [Signature]

I certify that I attached a label with the unique LIMS number to each container (initial) [Signature]

21. Were there Non-Conformance issues at login? YES...NO Was a PIPE generated? YES...NO..#

NSH0575

08/21/09 23 59

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

Nashville Division
2960 Foster Creighton
Nashville, TN 37204Phone: 615-726-0177
Toll Free: 800-765-0980
Fax: 615-726-3404To assist us in using the proper analytical
methods, is this work being conducted for
regulatory purposes?Compliance Monitoring? Yes ☐ No ☐Enforcement Action? Yes ☐ No ☐

Client Name/Account #: EEG # 2449

Address: 10179 Highway 78

City/State/Zip: Ladson, SC 29456

Project Manager: Tom McElwee email: mcelwee@eeginc.net

Telephone Number: 843.412.2097

Fax No.: 843-879-0401

Sampler Name: (Print) PRATH SHAW

Sampler Signature: *[Signature]*

Site State: SC

PO#: 0829

TA Quote #:

Project ID: Laurel Bay Housing Project

Project #:

Sample ID / Description	Date Sampled	Time Sampled	No. of Containers Shipped	Grab	Composite	Field Filtered	Ice	Preservative						Matrix						Analyze For:										RUSH TAT (Pre-Schedule)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
								HNO ₃ (Blue Label)	HCl (Blue Label)	NaOH (Orange Label)	H ₂ SO ₄ Plastic (Yellow Label)	H ₂ SO ₄ Glass (Yellow Label)	None (Black Label)	Other (Specify)	Groundwater	Wastewater	Drinking Water	Sludge	Soil	Other (specify):	BTEX + Napth - 82608	PAH - 8270D																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		

Special Instructions:

Method of Shipment:				FEDEX	
Relinquished by:	Date	Time	Received by:	Date	Time
<i>[Signature]</i>	8/16/09	1900	FedEx		
Relinquished by:	Date	Time	Received by TestAmerica:	Date	Time
			<i>[Signature]</i>	8/18/09	0900

Laboratory Comments:

Temperature Upon Receipt: 34c
VOCs Free of Headspace? Y

ATTACHMENT A



NON-HAZARDOUS MANIFEST

CWM

Please print or type. (Form designed for use on elite (12-pitch) typewriter.)

NON-HAZARDOUS MANIFEST		1. Generator's US EPA ID No.		Manifest Document No.		2. Page 1 of 1					
3. Generator's Name and Mailing Address MCAS, Beaufort Laurel Bay Housing Beaufort SC 29904				A. Manifest Number WMNA 10885466							
4. Generator's Phone 843 228-8460				B. State Generator's ID							
5. Transporter 1 Company Name EEG, Inc.		6. US EPA ID Number		C. State Transporter's ID		D. Transporter's Phone 843 879-0411					
7. Transporter 2 Company Name		8. US EPA ID Number		E. State Transporter's ID		F. Transporter's Phone					
9. Designated Facility Name and Site Address HICKORY HILL LANDFILL ROUTE 1, BOX 121 RIDGELAND SC 29936		10. US EPA ID Number		G. State Facility's ID		H. Facility's Phone 843 967-4543					
11. Description of Waste Materials				12. Containers No. Type		13. Total Quantity		14. Unit Wt./Vol.		I. Misc. Comments	
a. Heating Oil Tank filled with Sand WM Profile # 1020558C				0 0 1		7.24		TV			
b. WM Profile #											
c. WM Profile #											
d. WM Profile #											
J. Additional Descriptions for Materials Listed Above Landfill _____ Solidification _____ Bio Remediation _____				K. Disposal Location Cell _____ Level _____ Grid _____							
15. Special Handling Instructions and Additional Information GRA LISTS from HOUSERS Purchase Order # _____ EMERGENCY CONTACT: 1) 1406 Eagle ✓ 3) 1413 Albatross ✓ 6) 1426 Albatross ✓ 2) 1411 Eagle-2 ✓ 4) 1414 Albatross ✓ 5) Albatross-1423 ✓											
16. GENERATOR'S CERTIFICATION: I hereby certify that the above-described materials are not hazardous wastes as defined by 40 CFR Part 261 or any applicable state law, have been fully and accurately described, classified and packaged, and are in proper condition for transportation according to applicable regulations.											
Printed/Typed Name W.G. Duke, Jr.				Signature "On behalf of" <i>[Signature]</i>				Month Day Year 08/12/09			
17. Transporter 1 Acknowledgement of Receipt of Materials											
Printed/Typed Name James Baldwin				Signature <i>[Signature]</i>				Month Day Year 10/8/13/09			
18. Transporter 2 Acknowledgement of Receipt of Materials											
Printed/Typed Name				Signature				Month Day Year 10/8/13/09			
19. Certificate of Final Treatment/Disposal I certify, on behalf of the above listed treatment facility, that to the best of my knowledge, the above-described waste was managed in compliance with all applicable laws, regulations, permits and licenses on the dates listed above.											
20. Facility Owner or Operator: Certification of receipt of non-hazardous materials covered by this manifest.											
Printed/Typed Name Jan Collins				Signature <i>[Signature]</i>				Month Day Year 08/13/09			

Appendix C

Regulatory Correspondence



C. Earl Hunter, Commissioner

Promoting and protecting the health of the public and the environment.

Bureau of Land and Waste Management
Division of Waste Management

March 25, 2010

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United States Marine Corp Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: No Further Action
Laurel Bay Underground Storage Tank Assessment Report for:

- 1475 Cardinal
- 1227 Dove
- 1225 Dove
- 1223 Cardinal
- 1409 Eagle
- 1423 Albatross

Dear Mr. Drawdy,

The South Carolina Department of Health and Environmental Control (the Department) received the above referenced Underground Storage Tanks (USTs) Assessment Report on November 13, 2009 for the addresses listed above.

The Department has reviewed the referenced assessment report and agrees there is no indication of soil or groundwater contamination on this property, and therefore no further investigation is required at this time.

Please note that the Department's decision is based on information provided by the Marine Corp Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary.

If you have any questions, please contact me at picketen@dhec.sc.gov or 803-896-4131.

Sincerely,

Christi Pickett
Corrective Action Engineering Section
Bureau of Land and Waste Management
South Carolina Department of Health and Environmental Control

cc: Laurel Rhoten (via email)
Craig Ehde (via email)