

**SUMMARY REPORT
497 ASH STREET (FORMERLY 348 ASH STREET)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC**

**Revision: 0
Prepared for:**

**Department of the Navy
Naval Facilities Engineering Command, Mid-Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095**

and



**Naval Facilities Engineering Command Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095**

JUNE 2021

**SUMMARY REPORT
497 ASH STREET (FORMERLY 348 ASH STREET)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC**

**Revision: 0
Prepared for:**

**Department of the Navy
Naval Facilities Engineering Command, Mid- Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095**

and



Naval Facilities Engineering Command Atlantic

**9324 Virginia Avenue
Norfolk, Virginia 23511-3095**

Prepared by:

CDM - AECOM
Multimedia Joint Venture

**CDM - AECOM Multimedia Joint Venture
10560 Arrowhead Drive, Suite 500
Fairfax, Virginia 22030**

**Contract Number: N62470-14-D-9016
CTO WE52
JUNE 2021**

Table of Contents

1.0	INTRODUCTION	1
1.1	BACKGROUND INFORMATION.....	1
1.2	UST REMOVAL AND ASSESSMENT PROCESS.....	2
2.0	SAMPLING ACTIVITIES AND RESULTS	3
2.1	UST REMOVAL AND SOIL SAMPLING	3
2.2	SOIL ANALYTICAL RESULTS.....	4
2.3	GROUNDWATER SAMPLING.....	4
2.4	GROUNDWATER ANALYTICAL RESULTS	5
3.0	PROPERTY STATUS.....	5
4.0	REFERENCES	5

Tables

Table 1	Laboratory Analytical Results - Soil
Table 2	Laboratory Analytical Results - Groundwater

Appendices

Appendix A	Multi-Media Selection Process for LBMH
Appendix B	UST Assessment Report
Appendix C	Laboratory Analytical Report - Groundwater
Appendix D	Regulatory Correspondence

List of Acronyms

bgs	below ground surface
BTEX	benzene, toluene, ethylbenzene, and xylenes
CTO	Contract Task Order
COPC	constituents of potential concern
ft	feet
IDIQ	Indefinite Delivery, Indefinite Quantity
IGWA	Initial Groundwater Assessment
JV	Joint Venture
LBMH	Laurel Bay Military Housing
MCAS	Marine Corps Air Station
NAVFAC Mid-Lant	Naval Facilities Engineering Command Mid-Atlantic
NFA	No Further Action
PAH	polynuclear aromatic hydrocarbon
QAPP	Quality Assurance Program Plan
RBSL	risk-based screening level
SCDHEC	South Carolina Department of Health and Environmental Control
Site	LBMH area at MCAS Beaufort, South Carolina
UST	underground storage tank
VISL	vapor intrusion screening level

1.0 INTRODUCTION

The CDM - AECOM Multimedia Joint Venture (JV) was contracted by the Naval Facilities Engineering Command, Mid-Atlantic (NAVFAC Mid-Lant) to provide reporting services for the heating oil underground storage tanks (USTs) located in Laurel Bay Military Housing (LBMH) area at the Marine Corps Air Station (MCAS) Beaufort, South Carolina (Site). This work has been awarded under Contract Task Order (CTO) WE52 of the Indefinite Delivery, Indefinite Quantity (IDIQ) Multimedia Environmental Compliance Contract (Contract No. N62470-14-D-9016).

As of January 2014, the LBMH addresses were re-numbered to comply with the E-911 emergency response addressing system; however, in order to remain consistent with historical sampling and reporting for LBMH area, the residences will continue to be referenced with their original address numbers in sample nomenclature and reporting documents.

This report summarizes the results the environmental investigation activities associated with the storage of home heating oil and the potential release of petroleum constituents at the referenced property. Based on the results of the investigation, a No Further Action (NFA) determination has been made by the South Carolina Department of Health and Environmental Control (SCDHEC) for 497 Ash Street (Formerly 348 Ash Street). This NFA determination indicates that there are no unacceptable risks to human health or the environment for the petroleum constituents associated with the home heating oil USTs. The following information is included in this report:

- Background information;
- Sampling activities and results; and
- A determination of the property status.

1.1 Background Information

The LBMH area is located approximately 3.5 miles west of MCAS Beaufort. The area is approximately 970 acres in size and serves as an enlisted and officer family housing area. The area is configured with single family and duplex residential structures, and includes recreation, open space, and community facilities. The community includes approximately 1,300 housing units, including legacy Capehart style homes and newer duplex style homes. The housing area

is bordered on the west by salt marshes and the Broad River, and to the north, east and south by uplands. Forested areas lie along the northern and northeastern borders.

Capehart style homes within the LBMH area were formerly heated using heating oil stored in USTs at each residence. There were 1,100 Capehart style housing units in the LBMH area. The newer duplex homes within the LBMH area never utilized heating oil tanks. Heating oil has not been used at Laurel Bay since the mid-1980s. As was the accepted practice at the time, USTs were drained, filled with dirt, capped, and left in place when they were removed from service. Residential USTs are not regulated in the State of South Carolina (i.e., there are no federal or state laws governing installation, management, or removal).

In 2007, MCAS Beaufort began a voluntary program to remove the unregulated, residential USTs and conduct sampling activities to determine if, and to what extent, petroleum constituents may have impacted the surrounding environment. MCAS Beaufort coordinated with SCDHEC to develop removal procedures that were consistent with procedural requirements for regulated USTs. All tank removal activities and follow-on actions are conducted in coordination with SCDHEC. To date, all known USTs have been removed from all residential properties within the LBMH area.

1.2 UST Removal and Assessment Process

During the UST removal process, a soil sample was collected from beneath the UST excavations (approximately 4 to 6 feet [ft] below ground surface [bgs]) and analyzed for a predetermined list of constituents of potential concern (COPCs) associated with the petroleum compounds found in home heating oil. These COPCs, derived from the *Quality Assurance Program Plan (QAPP) for the Underground Storage Tank Management Division, Revision 3.1* (SCDHEC, 2016) and the *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, (SCDHEC, 2018), are as follows:

- benzene, toluene, ethylbenzene, and xylenes (BTEX),
- naphthalene, and
- five select polynuclear aromatic hydrocarbon (PAHs): benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene and dibenz(a,h)anthracene.

Soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form. In accordance with SCDHEC's *QAPP for the UST Management*

Division (SCDHEC, 2016), the soil screening levels consists of SCDHEC risk-based screening levels (RBSLs). It should be noted that the RBSLs for select PAHs were revised in Revision 2.0 of the QAPP (SCDHEC, 2013) and were revised again in Revision 3.0 (SCDHEC, 2015). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC.

The results of the soil sampling at each former UST location were used to determine if a potential for groundwater contamination exists (i.e., soil results greater than RBSLs) and subsequently to select properties for follow-up initial groundwater assessment (IGWA) sampling. The results of the IGWA sampling (if necessary) are used to determine the presence or absence of the aforementioned COPCs in groundwater and identify whether former UST locations will require additional delineation of COPCs in groundwater. In order to delineate the extent of impact to groundwater, permanent wells are installed and a sampling program is established for those former UST locations where IGWA sampling has indicated the presence of COPCs in excess of the SCDHEC RBSLs for groundwater. Groundwater analytical results are also compared to the site specific groundwater vapor intrusion screening levels (VISLs) to evaluate the potential for vapor intrusion and the necessity for an investigation associated with this media. A multi-media investigation selection process tree, applicable to the LBMH UST investigations, is presented as Appendix A.

2.0 SAMPLING ACTIVITIES AND RESULTS

The following section presents the sampling activities and associated results for 497 Ash Street (Formerly 348 Ash Street). Details regarding the soil investigation at this site are provided in the *SCDHEC UST Assessment Report – 348 Ash Street* (MCAS Beaufort, 2012). The UST Assessment Report is provided in Appendix B. Details regarding the IGWA sampling activities at this site are provided in the *Initial Groundwater Investigation Report – May and June 2015* (Resolution Consultants, 2015). The laboratory report that includes the pertinent IGWA analytical results for this site is presented in Appendix C.

2.1 UST Removal and Soil Sampling

On February 21, 2012, a single 280 gallon heating oil UST was removed from the front landscaped bed area adjacent to the front concrete porch at 497 Ash Street (Formerly 348 Ash Street). The former UST location is indicated on Figures 2 and 3 of the UST Assessment Report (Appendix B). The UST was removed, cleaned, and shipped offsite for recycling. There was no

visual evidence (i.e., staining or sheen) of petroleum impact at the time of the UST removal. According to the UST Assessment Report (Appendix B), the depth to the base of the UST was 5'6" bgs and a single soil sample was collected from that depth. The sample was collected from the fill port side of the former UST to represent a worst case scenario.

Following UST removal, a soil sample was collected from the base of the excavation and shipped to an offsite laboratory for analysis of the petroleum COPCs. Sampling was performed in accordance with applicable South Carolina regulation R.61-92, Part 280 (SCDHEC, 2017) and assessment guidelines.

2.2 Soil Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 1. A copy of the laboratory analytical data report is included in the UST Assessment Report presented in Appendix B. The laboratory analytical data report includes the soil results for the additional PAHs that were analyzed, but do not have associated RBSLs.

The soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form (Appendix B). The results of the soil sampling at the former UST location were used by MCAS Beaufort, in consultation with SCDHEC, to determine a path forward (i.e., additional sampling or NFA) for the property. The soil results collected from 497 Ash Street (Formerly 348 Ash Street) were greater than the SCDHEC RBSLs, which indicated further investigation was required. In a letter dated May 15, 2014, SCDHEC requested an IGWA for 497 Ash Street (Formerly 348 Ash Street) to determine if the groundwater was impacted by petroleum COPCs. SCDHEC's request letter is provided in Appendix D.

2.3 Groundwater Sampling

On June 1, 2015, a temporary monitoring well was installed at 497 Ash Street (Formerly 348 Ash Street), in accordance with the South Carolina Well Standards and Regulations (R.61-71.H-I, updated June 24, 2016). In order to provide data that can be used to determine whether COPCs are migrating to underlying groundwater, the monitoring well was placed in the same general location as the former heating oil UST. The former UST location is indicated on Figures 2 and 3 of the UST Assessment Report (Appendix B). Further details are provided in the *Initial Groundwater Investigation Report – May and June 2015* (Resolution Consultants, 2015).

The sampling strategy for this phase of the investigation required a one-time sampling event of the temporarily installed monitoring well. Following well installation and development, groundwater samples were collected using low-flow methods and shipped to an offsite laboratory for analysis of the petroleum COPCs. Upon completion of groundwater sampling, the temporary well was abandoned in accordance with the South Carolina Well Standards and Regulations R.61-71 (SCDHEC, 2016). Field forms are provided in the *Initial Groundwater Investigation Report – May and June 2015* (Resolution Consultants, 2015).

2.4 Groundwater Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 2. A copy of the laboratory analytical data report is included in Appendix C.

The groundwater results collected from 497 Ash Street (Formerly 348 Ash Street) were less than the SCDHEC RBSLs and the site specific groundwater VISLs (Table 2), which indicated that the groundwater was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.

3.0 PROPERTY STATUS

Based on the analytical results for groundwater, SCDHEC made the determination that NFA was required for 497 Ash Street (Formerly 348 Ash Street). This NFA determination was obtained in a letter dated February 22, 2016. SCDHEC's NFA letter is provided in Appendix D.

4.0 REFERENCES

Marine Corps Air Station Beaufort, 2012. *South Carolina Department of Health and Environmental Control (SCDHEC) Underground Storage Tank Assessment Report – 348 Ash Street, Laurel Bay Military Housing Area*, June 2012.

Resolution Consultants, 2015. *Initial Groundwater Investigation Report – May and June 2015 for Laurel Bay Military Housing Area, Multiple Properties, Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina*, October 2015.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2013. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 2.0*, April 2013.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2015. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.0*, May 2015.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2016. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1*, February 2016.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2017. *R.61-92, Part 280, Underground Storage Tank Control Regulations*, March 2017.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2018. *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, March 2018.

South Carolina Department of Health and Environmental Control Bureau of Water, 2016. *R.61-71, Well Standards*, June 2016.

Tables

Table 1
Laboratory Analytical Results - Soil
497 Ash Street (Formerly 348 Ash Street)
Laurel Bay Military Housing Area
Marine Corps Air Station Beaufort
Beaufort, South Carolina

Constituent	SCDHEC RBSLs ⁽¹⁾	Results Sample Collected 02/21/12
Volatile Organic Compounds Analyzed by EPA Method 8260B (mg/kg)		
Benzene	0.003	0.0317
Ethylbenzene	1.15	0.0598
Naphthalene	0.036	0.627
Toluene	0.627	ND
Xylenes, Total	13.01	0.194
Semivolatile Organic Compounds Analyzed by EPA Method 8270D (mg/kg)		
Benzo(a)anthracene	0.66	ND
Benzo(b)fluoranthene	0.66	ND
Benzo(k)fluoranthene	0.66	ND
Chrysene	0.66	ND
Dibenz(a,h)anthracene	0.66	ND

Notes:

⁽¹⁾ South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 2.0 (SCDHEC, April 2013).

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL.

EPA - United States Environmental Protection Agency

mg/kg - milligrams per kilogram

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The soil laboratory report is provided in Appendix B.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

Table 2
Laboratory Analytical Results - Groundwater
497 Ash Street (Formerly 348 Ash Street)
Laurel Bay Military Housing Area
Marine Corps Air Station Beaufort
Beaufort, South Carolina

Constituent	SCDHEC RBSLs ⁽¹⁾	Site-Specific Groundwater VISLs (µg/L) ⁽²⁾	Results Sample Collected 06/01/15
Volatile Organic Compounds Analyzed by EPA Method 8260B (µg/L)			
Benzene	5	16.24	ND
Ethylbenzene	700	45.95	ND
Naphthalene	25	29.33	ND
Toluene	1000	105,445	ND
Xylenes, Total	10,000	2,133	ND
Semivolatile Organic Compounds Analyzed by EPA Method 8270D (µg/L)			
Benzo(a)anthracene	10	NA	ND
Benzo(b)fluoranthene	10	NA	ND
Benzo(k)fluoranthene	10	NA	ND
Chrysene	10	NA	ND
Dibenz(a,h)anthracene	10	NA	ND

Notes:

⁽¹⁾ South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1 (SCDHEC, February 2016).

⁽²⁾ Site-specific groundwater VISLs were calculated using the EPA JE Model Spreadsheets (Version 3.1, February 2004) and conservative modeling inputs representative of a small single-story house with an 8 foot ceiling. Site-specific groundwater VISLs were developed based on a target risk level of 1×10^{-6} , a target hazard quotient of 1 (per target organ), and a default residential exposure scenario, assuming exposure for 24 hours/day, 350 days/year, for 26 years. Modeling was performed for a range of depths to groundwater for application as appropriate in different areas of the Laurel Bay Military Housing Area. The most conservative levels are presented for comparison. Refer to Appendix H of the Uniform Federal Policy Sampling Analysis and Sampling Plan for Vapor Media, Revision 4 (Resolution Consultants, April 2017) for additional information.

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL and/or the Site-Specific Groundwater VISL.

EPA - United States Environmental Protection Agency

JE - Johnson & Ettinger

NA - Not Applicable

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The groundwater laboratory report is provided in Appendix C.


RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

µg/L - micrograms per liter

VISL - Vapor Intrusion Screening Level

Appendix A
Multi-Media Selection Process for LBMH

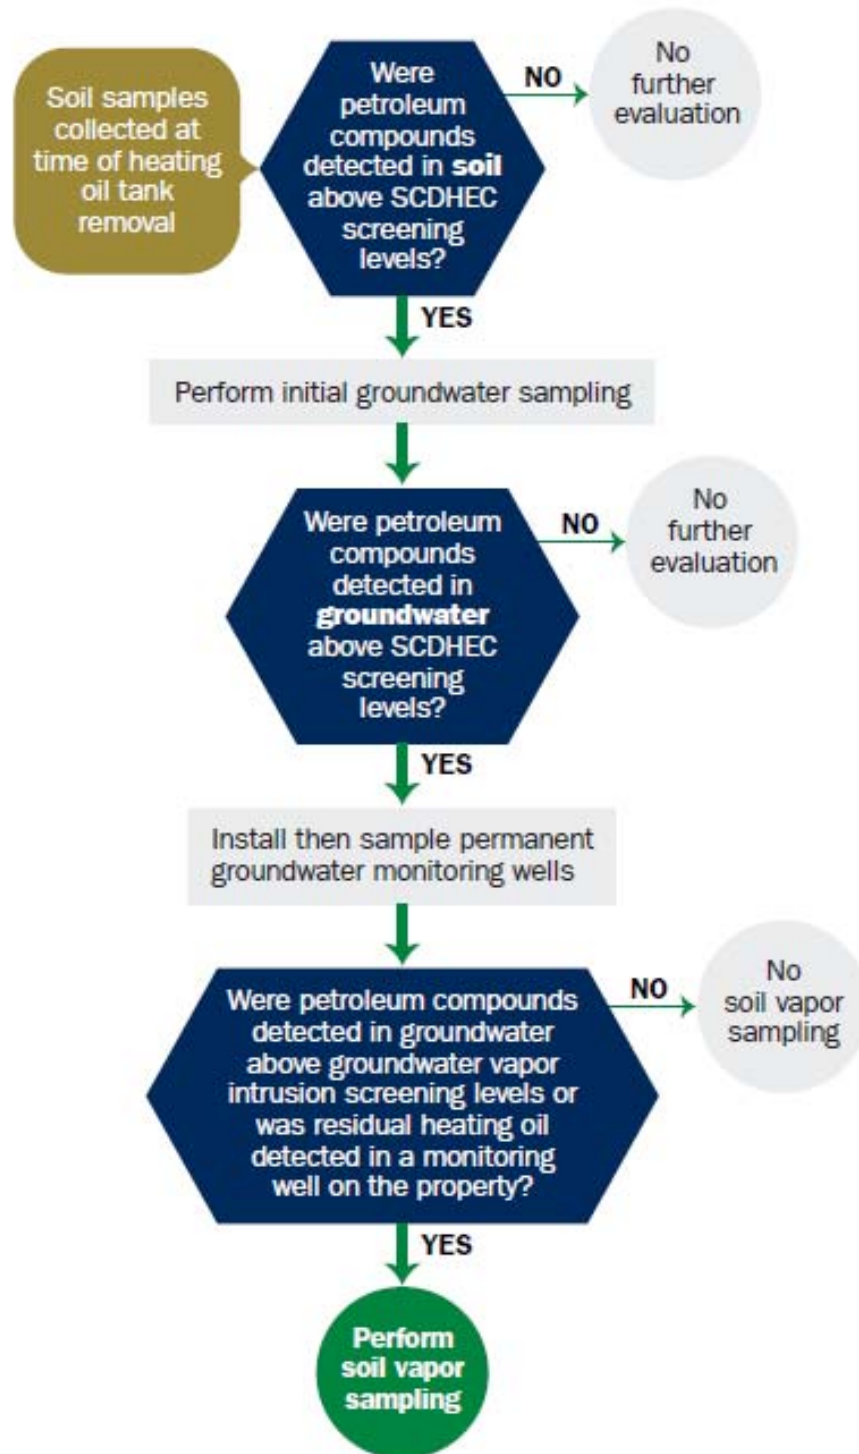

Appendix A - Multi-Media Selection Process for LBMH

Appendix B
UST Assessment Report

Attachment 1

South Carolina Department of Health and Environmental Control (SCDHEC)
Underground Storage Tank (UST) Assessment Report

Date Received State Use Only

Submit Completed Form To:
UST Program
SCDHEC
2600 Bull Street
Columbia, South Carolina 29201
Telephone (803) 896-7957

I. OWNERSHIP OF UST (S)

MCAS Beaufort, Commanding Officer Attn: NREAO (Craig Ehde)		
Owner Name (Corporation, Individual, Public Agency, Other)		
P.O. Box 55001		
Mailing Address		
Beaufort,	South Carolina	29904-5001
City	State	Zip Code
843	228-7317	Craig Ehde
Area Code	Telephone Number	Contact Person

II. SITE IDENTIFICATION AND LOCATION

Permit I.D. #	
Laurel Bay Military Housing Area, Marine Corps Air Station, Beaufort, SC	
Facility Name or Company Site Identifier	
348 Ash Street, Laurel Bay Military Housing Area	
Street Address or State Road (as applicable)	
Beaufort,	Beaufort
City	County

Attachment 2

III. INSURANCE INFORMATION

Insurance Statement

The petroleum release reported to DHEC on _____ at Permit ID Number _____ may qualify to receive state monies to pay for appropriate site rehabilitation activities. Before participation is allowed in the State Clean-up fund, written confirmation of the existence or non-existence of an environmental insurance policy is required. **This section must be completed.**

Is there now, or has there ever been an insurance policy or other financial mechanism that covers this UST release? **YES**____ **NO**____ (check one)

If you answered **YES** to the above question, please complete the following information:

My policy provider is: _____

The policy deductible is: _____

The policy limit is: _____

If you have this type of insurance, please include a copy of the policy with this report.

IV. REQUEST FOR SUPERB FUNDING

I **DO** / **DO NOT** wish to participate in the SUPERB Program. (Circle one.)

V. CERTIFICATION (To be signed by the UST owner)

I certify that I have personally examined and am familiar with the information submitted in this and all attached documents; and that based on my inquiry of those individuals responsible for obtaining this information, I believe that the submitted information is true, accurate, and complete.

Name (Type or print.)

Signature

To be completed by Notary Public:

Sworn before me this _____ day of _____, 20____

(Name)

Notary Public for the state of _____
Please affix State seal if you are commissioned outside South Carolina

VI. UST INFORMATION

A. Product...(ex. Gas, Kerosene).....

B. Capacity..(ex. 1k, 2k).....

C. Age.....

D. Construction Material..(ex. Steel, FRP).....

E. Month/Year of Last Use.....

F. Depth (ft.) To Base of Tank.....

G. Spill Prevention Equipment Y/N.....

H. Overfill Prevention Equipment Y/N.....

I. Method of Closure Removed/Filled.....

J. Date Tanks Removed/Filled.....

K. Visible Corrosion or Pitting Y/N.....

L. Visible Holes Y/N.....

M. Method of disposal for any USTs removed from the ground (attach disposal manifests)

UST 348Ash was removed from the ground, cleaned and recycled. See Attachment "A."

N. Method of disposal for any liquid petroleum, sludges, or wastewaters removed from the USTs (attach disposal manifests)

Contaminated water was pumped from UST 348Ash and disposed by MCAS.

O. If any corrosion, pitting, or holes were observed, describe the location and extent for each UST

Corrosion, pitting and holes were found throughout the tank.

348Ash				
Heating oil				
280 gal				
Late 1950s				
Steel				
Mid 1980s				
5'6"				
No				
No				
Removed				
2/21/12				
Yes				
Yes				

VII. PIPING INFORMATION

A. Construction Material..(ex. Steel, FRP).....

B. Distance from UST to Dispenser.....

C. Number of Dispensers.....

D. Type of System Pressure or Suction.....

E. Was Piping Removed from the Ground? Y/N

F. Visible Corrosion or Pitting Y/N.....

G. Visible Holes Y/N.....

H. Age.....

I. If any corrosion, pitting, or holes were observed, describe the location and extent for each piping run.

348Ash				
Steel & Copper				
N/A				
N/A				
Suction				
No				
Yes				
No				
Late 1950s				

Corrosion and pitting were found on the surface of the steel vent pipe. Copper supply and return lines were sound.

VIII. BRIEF SITE DESCRIPTION AND HISTORY

The USTs at the residences are constructed of single wall steel and formerly contained fuel oil for heating. These USTs were installed in the late 1950s and last used in the mid 1980s.

IX. SITE CONDITIONS

	Yes	No	Unk
A. Were any petroleum-stained or contaminated soils found in the UST excavation, soil borings, trenches, or monitoring wells? If yes, indicate depth and location on the site map.		X	
B. Were any petroleum odors detected in the excavation, soil borings, trenches, or monitoring wells? If yes, indicate location on site map and describe the odor (strong, mild, etc.)		X	
C. Was water present in the UST excavation, soil borings, or trenches? If yes, how far below land surface (indicate location and depth)?		X	
D. Did contaminated soils remain stockpiled on site after closure? If yes, indicate the stockpile location on the site map. Name of DHEC representative authorizing soil removal:		X	
E. Was a petroleum sheen or free product detected on any excavation or boring waters? If yes, indicate location and thickness.		X	

X. SAMPLE INFORMATION

A. SCDHEC Lab Certification Number 84009

B.

Sample #	Location	Sample Type (Soil/Water)	Soil Type (Sand/Clay)	Depth*	Date/Time of Collection	Collected by	OVA #
348Ash	Excav at fill end	Soil	Sandy	5'6"	2/21/12 1430 hrs	P. Shaw	
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

* = Depth Below the Surrounding Land Surface

XI. SAMPLING METHODOLOGY

Provide a detailed description of the methods used to collect and store the samples. Also include the preservative used for each sample. Please use the space provided below.

Sampling was performed in accordance with SC DHEC R.61-92 Part 280 and SC DHEC Assessment Guidelines. Sample containers were prepared by the testing laboratory. The grab method was utilized to fill the sample containers leaving as little head space as possible and immediately capped. Soil samples were extracted from area below tank. The samples were marked, logged, and immediately placed in a sample cooler packed with ice to maintain an approximate temperature of 4 degrees Centigrade. Tools were thoroughly cleaned and decontaminated with the seven step decon process after each use. The samples remained in custody of SBG-EEG, Inc. until they were transferred to Test America Incorporated for analysis as documented in the Chain of Custody Record.



XII. RECEPTORS

	Yes	No
A. Are there any lakes, ponds, streams, or wetlands located within 1000 feet of the UST system? *~365' to stormwater canal If yes, indicate type of receptor, distance, and direction on site map.	*X	
B. Are there any public, private, or irrigation water supply wells within 1000 feet of the UST system? If yes, indicate type of well, distance, and direction on site map.		X
C. Are there any underground structures (e.g., basements) Located within 100 feet of the UST system? If yes, indicate type of structure, distance, and direction on site map.		X
D. Are there any underground utilities (e.g., telephone, electricity, gas, water, sewer, storm drain) located within 100 feet of the UST system that could potentially come in contact with the contamination? *Sewer, water, electricity, cable & fiber optic If yes, indicate the type of utility, distance, and direction on the site map.	*X	
E. Has contaminated soil been identified at a depth less than 3 feet below land surface in an area that is not capped by asphalt or concrete? If yes, indicate the area of contaminated soil on the site map.		X

XIII. SITE MAP

You must supply a scaled site map. It should include all buildings, road names, utilities, tank and dispenser island locations, labeled sample locations, extent of excavation, and any other pertinent information.

(Attach Site Map Here)

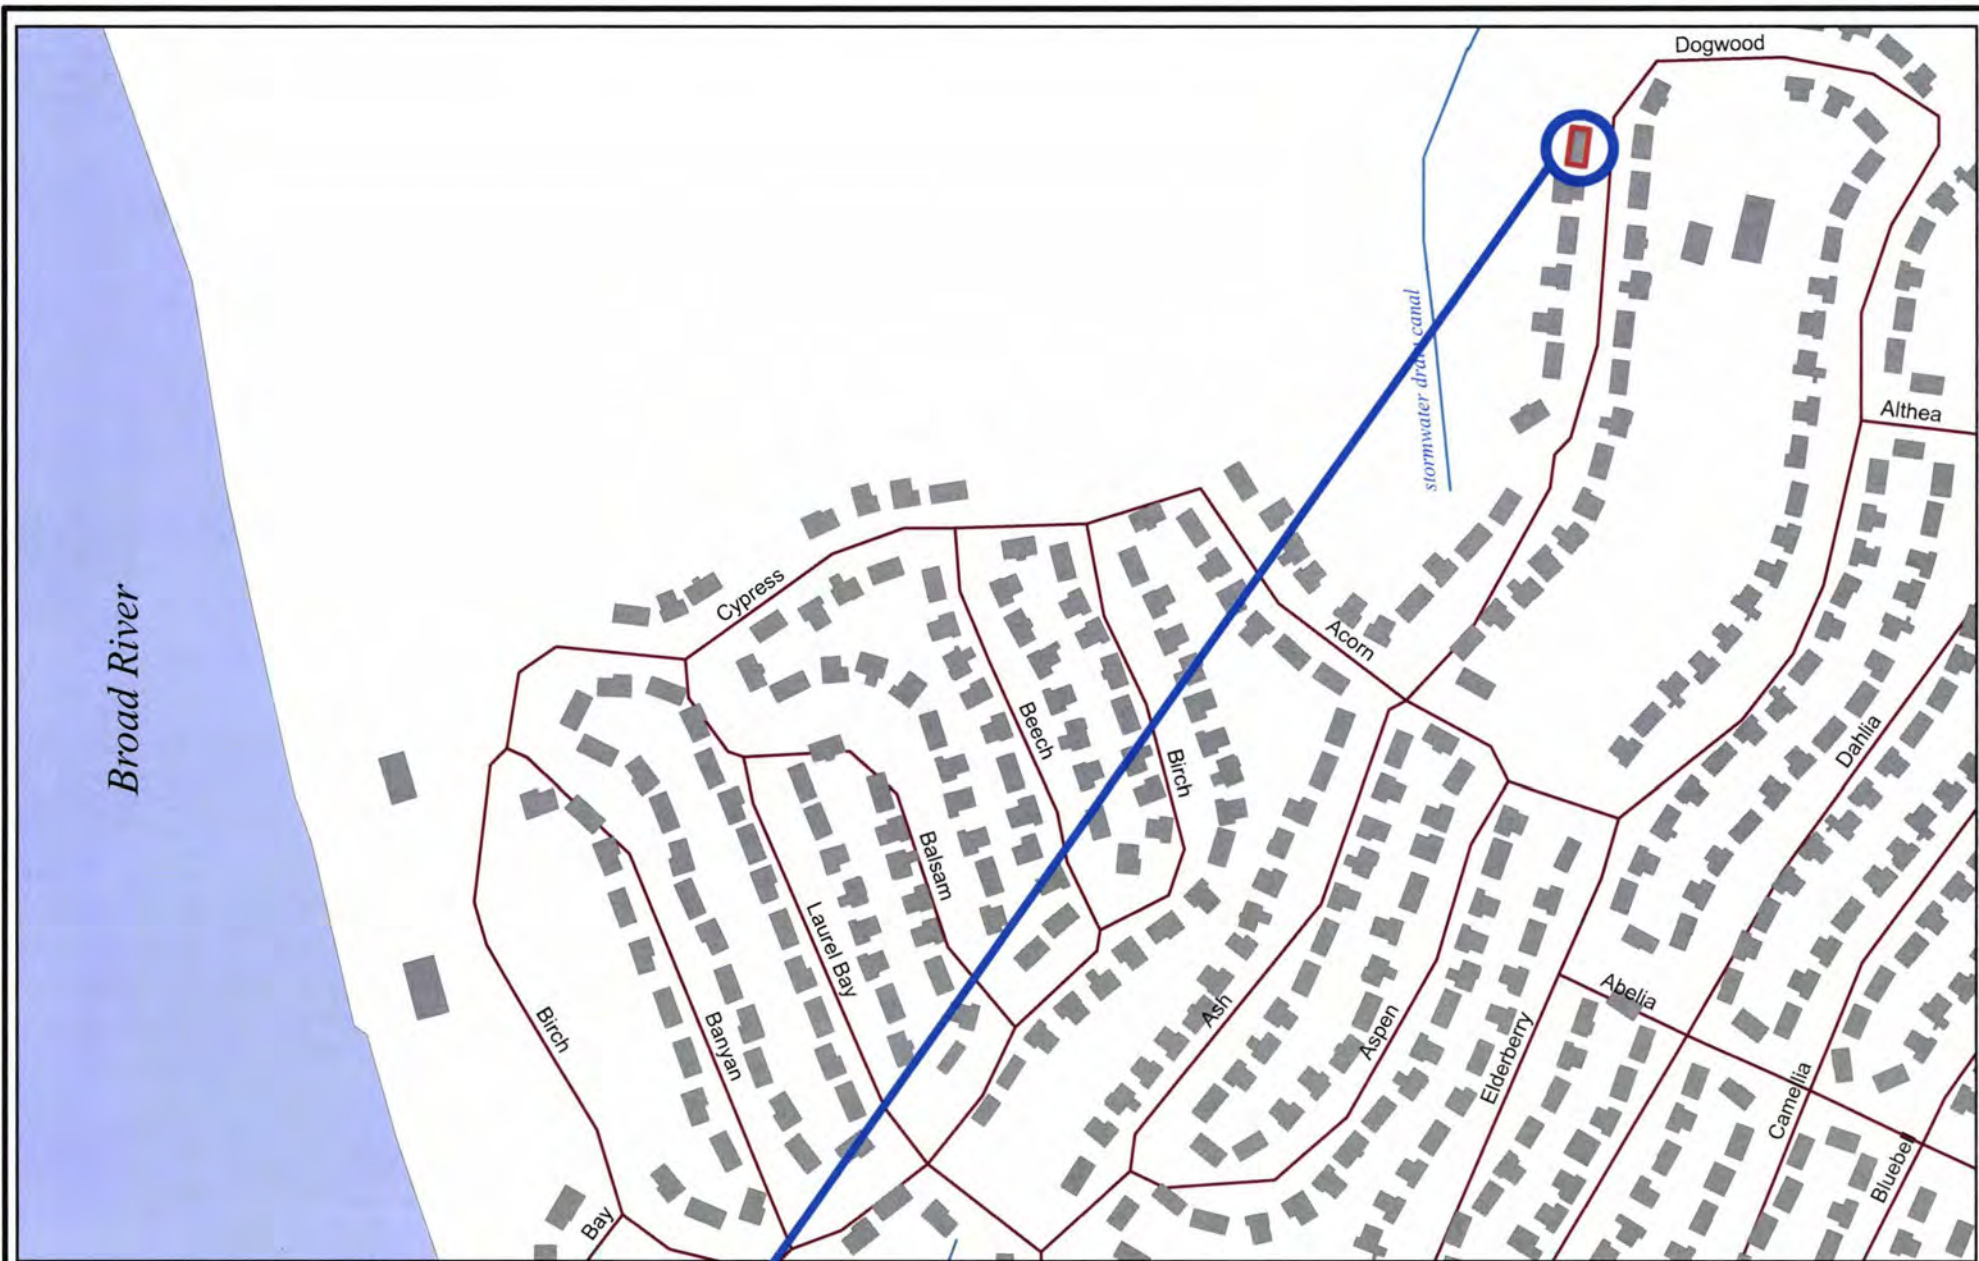

348 ASH

SBG-EEG, Inc.


7301 Rivers Ave., Suite 245
N. Charleston SC 29406-9643

Ph. (843) 573-7140

Drawn By: L. DiAsio

Dwg Date: MAR 2012

FIGURE 1: LOCATION MAP
348 ASH STREET
LAUREL BAY, BEAUFORT SC



STORMWATER DRAINAGE
CANAL $\approx$ 365'

348 ASH STREET
LAUREL BAY MILITARY HOUSING
MCAS BEAUFORT, SC

CONCRETE PORCH

CONCRETE WALK

UST 348ASH,
280 GAL.

ASPHALT
DRIVEWAY

GRAPHIC SCALE

0 5' 10' 20'

TANK DEPTH BELOW GRADE
348ASH = 30"


SBG-EEG

7301 RIVERS AVE., SUITE 245
N. CHARLESTON SC 29406-9643
(843) 573-7140

FIGURE 2 SITE MAP
348 ASH ST., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE MAR 2012



348 ASH STREET

FILL END

UST 348ASH


EXCAVATION

SOIL SAMPLE
348 ASH



STORMWATER DRAINAGE
CANAL $\approx$ 365'

GRAPHIC SCALE



SBG-EEG

7301 RIVERS AVE., SUITE 245
N. CHARLESTON SC 29406-9643
(843) 573-7140

FIGURE 3 UST SAMPLE LOCATIONS
348 ASH ST., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE MAR 2012



Picture 1: Location of UST 348Ash.



Picture 2: UST 348Ash tank pit.

XIV. SUMMARY OF ANALYSIS RESULTS

Enter the soil analytical data for each soil boring for all COC in the table below and on the following page.

CoC	UST	348Ash						
Benzene		0.0317 mg/kg						
Toluene		ND						
Ethylbenzene		0.0598 mg/kg						
Xylenes		0.194 mg/kg						
Naphthalene		0.627 mg/kg						
Benzo (a) anthracene		ND						
Benzo (b) fluoranthene		ND						
Benzo (k) fluoranthene		ND						
Chrysene		ND						
Dibenz (a, h) anthracene		ND						
TPH (EPA 3550)								

CoC								
Benzene								
Toluene								
Ethylbenzene								
Xylenes								
Naphthalene								
Benzo (a) anthracene								
Benzo (b) fluoranthene								
Benzo (k) fluoranthene								
Chrysene								
Dibenz (a, h) anthracene								
TPH (EPA 3550)								

SUMMARY OF ANALYSIS RESULTS (cont'd)

Enter the ground water analytical data for each sample for all CoC in the table below. If free product is present, indicate the measured thickness to the nearest 0.01 feet.

CoC	RBSL (µg/l)	W-1	W-2	W -3	W -4
Free Product Thickness	None				
Benzene	5				
Toluene	1,000				
Ethylbenzene	700				
Xylenes	10,000				
Total BTEX	N/A				
MTBE	40				
Naphthalene	25				
Benzo (a) anthracene	10				
Benzo (b) flouranthene	10				
Benzo (k) flouranthene	10				
Chrysene	10				
Dibenz (a, h) anthracene	10				
EDB	.05				
1,2-DCA	5				
Lead	Site specific				

XV. ANALYTICAL RESULTS

You must submit the laboratory report and chain-of-custody form for the samples. These samples must be analyzed by a South Carolina certified laboratory.

(Attach Certified Analytical Results and Chain-of-Custody Here)
(Please see Form #4)

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

ANALYTICAL REPORT

TestAmerica Laboratories, Inc.

TestAmerica Nashville

2960 Foster Creighton Road

Nashville, TN 37204

Tel: 800-765-0980

TestAmerica Job ID: NWB3548

Client Project/Site: [none]

Client Project Description: Laurel Bay Housing Project


For:

EEG - Small Business Group, Inc. (2449)

10179 Highway 78

Ladson, SC 29456

Attn: Tom McElwee



Authorized for release by:

3/7/2012 2:24:45 PM

Ken A. Hayes

Senior Project Manager

ken.hayes@testamericainc.com

LINKS

Review your project
results through

TotalAccess

Have a Question?



Visit us at:

www.testamericainc.com

This report has been electronically signed and authorized by the signatory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

Results relate only to the items tested and the sample(s) as received by the laboratory.

1

2

3

4

5

6

7

8

9

10

11

Table of Contents

Cover Page	1
Table of Contents	2
Sample Summary	3
Definitions	4
Client Sample Results	5
QC Sample Results	8
QC Association	14
Chronicle	16
Method Summary	17
Certification Summary	18
Chain of Custody	19



Sample Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Lab Sample ID	Client Sample ID	Matrix	Collected	Received
NWB3548-01	348 Ash	Soil	02/21/12 14:30	02/25/12 08:30
NWB3548-02	344 Ash-1	Soil	02/22/12 13:30	02/25/12 08:30
NWB3548-03	344 Ash-2	Soil	02/22/12 14:30	02/25/12 08:30

1

2

3

4

5

6

7

8

9

10

11

Definitions/Glossary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Qualifiers

GCMS Volatiles

Qualifier	Qualifier Description
ZX	Due to sample matrix effects, the surrogate recovery was outside the acceptance limits.
J	Result is less than the RL but greater than or equal to the MDL and the concentration is an approximate value.
RL1	Reporting limit raised due to sample matrix effects.

GCMS Semivolatiles

Qualifier	Qualifier Description
J	Result is less than the RL but greater than or equal to the MDL and the concentration is an approximate value.

Glossary

Abbreviation	These commonly used abbreviations may or may not be present in this report.
☼	Listed under the "D" column to designate that the result is reported on a dry weight basis
%R	Percent Recovery
CNF	Contains no Free Liquid
DL, RA, RE, IN	Indicates a Dilution, Reanalysis, Re-extraction, or additional Initial metals/anion analysis of the sample
EDL	Estimated Detection Limit
EPA	United States Environmental Protection Agency
MDL	Method Detection Limit
ML	Minimum Level (Dioxin)
ND	Not detected at the reporting limit (or MDL or EDL if shown)
PQL	Practical Quantitation Limit
QC	Quality Control
RL	Reporting Limit
RPD	Relative Percent Difference, a measure of the relative difference between two points
TEF	Toxicity Equivalent Factor (Dioxin)
TEQ	Toxicity Equivalent Quotient (Dioxin)

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Client Sample ID: 348 Ash

Lab Sample ID: NWB3548-01

Date Collected: 02/21/12 14:30

Matrix: Soil

Date Received: 02/25/12 08:30

Percent Solids: 79.9

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	0.0317		0.00209	0.00115	mg/kg dry	☆	02/21/12 14:30	02/27/12 19:09	1.00
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	114		70 - 130				02/21/12 14:30	02/27/12 19:09	1.00
Dibromofluoromethane	106		70 - 130				02/21/12 14:30	02/27/12 19:09	1.00
Toluene-d8	132	ZX	70 - 130				02/21/12 14:30	02/27/12 19:09	1.00
4-Bromofluorobenzene	89		70 - 130				02/21/12 14:30	02/27/12 19:09	1.00

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B - RE1

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Ethylbenzene	0.0598	RL1 J	0.104	0.0572	mg/kg dry	☆	02/21/12 14:30	02/28/12 14:01	50.0
Naphthalene	0.627		0.260	0.130	mg/kg dry	☆	02/21/12 14:30	02/28/12 14:01	50.0
Toluene	ND	RL1	0.104	0.0572	mg/kg dry	☆	02/21/12 14:30	02/28/12 14:01	50.0
Xylenes, total	0.194	J RL1	0.260	0.130	mg/kg dry	☆	02/21/12 14:30	02/28/12 14:01	50.0
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	85		70 - 130				02/21/12 14:30	02/28/12 14:01	50.0
Dibromofluoromethane	86		70 - 130				02/21/12 14:30	02/28/12 14:01	50.0
Toluene-d8	106		70 - 130				02/21/12 14:30	02/28/12 14:01	50.0
4-Bromofluorobenzene	104		70 - 130				02/21/12 14:30	02/28/12 14:01	50.0

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	0.0681	J	0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Acenaphthylene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Anthracene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Benzo (a) anthracene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Benzo (a) pyrene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Benzo (b) fluoranthene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Benzo (g,h,i) perylene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Benzo (k) fluoranthene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Chrysene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Dibenz (a,h) anthracene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Fluoranthene	0.107		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Fluorene	0.127		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Naphthalene	0.135		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Phenanthrene	0.317		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Pyrene	0.159		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
1-Methylnaphthalene	0.631		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
2-Methylnaphthalene	1.06		0.0834	0.0423	mg/kg dry	☆	02/27/12 12:30	03/01/12 17:59	1.00
Surrogate	%Recovery	Qualifier	Limits				Prepared	Analyzed	Dil Fac
Terphenyl-d14	83		18 - 120				02/27/12 12:30	03/01/12 17:59	1.00
2-Fluorobiphenyl	65		14 - 120				02/27/12 12:30	03/01/12 17:59	1.00
Nitrobenzene-d5	69		17 - 120				02/27/12 12:30	03/01/12 17:59	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	79.9		0.500	0.500	%		02/27/12 12:43	02/28/12 09:26	1.00

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Client Sample ID: 344 Ash-1

Date Collected: 02/22/12 13:30

Date Received: 02/25/12 08:30

Lab Sample ID: NWB3548-02

Matrix: Soil

Percent Solids: 73.9

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B - RE1

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND	RL1	0.152	0.0834	mg/kg dry	☆	02/22/12 13:30	02/28/12 14:31	50.0
Ethylbenzene	0.318		0.152	0.0834	mg/kg dry	☆	02/22/12 13:30	02/28/12 14:31	50.0
Naphthalene	2.89		0.379	0.190	mg/kg dry	☆	02/22/12 13:30	02/28/12 14:31	50.0
Toluene	ND	RL1	0.152	0.0834	mg/kg dry	☆	02/22/12 13:30	02/28/12 14:31	50.0
Xylenes, total	ND	RL1	0.379	0.190	mg/kg dry	☆	02/22/12 13:30	02/28/12 14:31	50.0

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	84		70 - 130	02/22/12 13:30	02/28/12 14:31	50.0
Dibromofluoromethane	86		70 - 130	02/22/12 13:30	02/28/12 14:31	50.0
Toluene-d8	107		70 - 130	02/22/12 13:30	02/28/12 14:31	50.0
4-Bromofluorobenzene	103		70 - 130	02/22/12 13:30	02/28/12 14:31	50.0

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	0.335		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Acenaphthylene	0.0886		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Anthracene	0.897		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Benzo (a) anthracene	0.731		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Benzo (a) pyrene	0.239		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Benzo (b) fluoranthene	0.365		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Benzo (g,h,i) perylene	0.0662	J	0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Benzo (k) fluoranthene	0.227		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Chrysene	0.551		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Dibenz (a,h) anthracene	ND		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Fluoranthene	3.71		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Fluorene	0.983		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Indeno (1,2,3-cd) pyrene	0.0763	J	0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Naphthalene	0.486		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
Pyrene	2.86		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
1-Methylnaphthalene	2.45		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00
2-Methylnaphthalene	4.12		0.0881	0.0447	mg/kg dry	☆	02/27/12 12:30	03/01/12 18:24	1.00

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
Terphenyl-d14	82		18 - 120	02/27/12 12:30	03/01/12 18:24	1.00
2-Fluorobiphenyl	54		14 - 120	02/27/12 12:30	03/01/12 18:24	1.00
Nitrobenzene-d5	77		17 - 120	02/27/12 12:30	03/01/12 18:24	1.00

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D - RE1

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Phenanthrene	6.02		0.176	0.0895	mg/kg dry	☆	02/27/12 12:30	03/02/12 00:00	2.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	73.9		0.500	0.500	%	-	02/27/12 12:43	02/28/12 09:26	1.00

Client Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Client Sample ID: 344 Ash-2

Lab Sample ID: NWB3548-03

Date Collected: 02/22/12 14:30

Matrix: Soil

Date Received: 02/25/12 08:30

Percent Solids: 83.8

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B - RE1

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00162	0.000891	mg/kg dry	☼	02/22/12 14:30	02/28/12 13:01	1.00
Ethylbenzene	0.00262		0.00162	0.000891	mg/kg dry	☼	02/22/12 14:30	02/28/12 13:01	1.00
Toluene	ND		0.00162	0.000891	mg/kg dry	☼	02/22/12 14:30	02/28/12 13:01	1.00
Xylenes, total	0.00220	J	0.00405	0.00202	mg/kg dry	☼	02/22/12 14:30	02/28/12 13:01	1.00

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	87		70 - 130	02/22/12 14:30	02/28/12 13:01	1.00
Dibromofluoromethane	93		70 - 130	02/22/12 14:30	02/28/12 13:01	1.00
Toluene-d8	120		70 - 130	02/22/12 14:30	02/28/12 13:01	1.00
4-Bromofluorobenzene	133	ZX	70 - 130	02/22/12 14:30	02/28/12 13:01	1.00

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B - RE2

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Naphthalene	0.202	J RL1	0.262	0.131	mg/kg dry	☼	02/22/12 14:30	02/28/12 13:31	50.0

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	83		70 - 130	02/22/12 14:30	02/28/12 13:31	50.0
Dibromofluoromethane	87		70 - 130	02/22/12 14:30	02/28/12 13:31	50.0
Toluene-d8	109		70 - 130	02/22/12 14:30	02/28/12 13:31	50.0
4-Bromofluorobenzene	98		70 - 130	02/22/12 14:30	02/28/12 13:31	50.0

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	0.287		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Acenaphthylene	0.118		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Anthracene	0.189		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Benzo (a) anthracene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Benzo (a) pyrene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Benzo (b) fluoranthene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Benzo (g,h,i) perylene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Benzo (k) fluoranthene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Chrysene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Dibenz (a,h) anthracene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Fluoranthene	0.0756	J	0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Fluorene	0.750		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Naphthalene	0.123		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Phenanthrene	2.25		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
Pyrene	0.142		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
1-Methylnaphthalene	1.26		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00
2-Methylnaphthalene	2.54		0.0795	0.0404	mg/kg dry	☼	02/27/12 12:30	03/01/12 18:48	1.00

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
Terphenyl-d14	82		18 - 120	02/27/12 12:30	03/01/12 18:48	1.00
2-Fluorobiphenyl	64		14 - 120	02/27/12 12:30	03/01/12 18:48	1.00
Nitrobenzene-d5	88		17 - 120	02/27/12 12:30	03/01/12 18:48	1.00

Method: SW-846 - General Chemistry Parameters

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
% Dry Solids	83.8		0.500	0.500	%		02/27/12 12:43	02/28/12 09:26	1.00

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B

Lab Sample ID: 12B6363-BLK1

Matrix: Soil

Analysis Batch: V003807

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 12B6363_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00200	0.00110	mg/kg wet		02/28/12 10:00	02/28/12 12:00	1.00
Ethylbenzene	ND		0.00200	0.00110	mg/kg wet		02/28/12 10:00	02/28/12 12:00	1.00
Naphthalene	ND		0.00500	0.00250	mg/kg wet		02/28/12 10:00	02/28/12 12:00	1.00
Toluene	ND		0.00200	0.00110	mg/kg wet		02/28/12 10:00	02/28/12 12:00	1.00
Xylenes, total	ND		0.00500	0.00250	mg/kg wet		02/28/12 10:00	02/28/12 12:00	1.00

Surrogate	Blank %Recovery	Blank Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	80		70 - 130	02/28/12 10:00	02/28/12 12:00	1.00
Dibromofluoromethane	86		70 - 130	02/28/12 10:00	02/28/12 12:00	1.00
Toluene-d8	109		70 - 130	02/28/12 10:00	02/28/12 12:00	1.00
4-Bromofluorobenzene	102		70 - 130	02/28/12 10:00	02/28/12 12:00	1.00

Lab Sample ID: 12B6363-BLK2

Matrix: Soil

Analysis Batch: V003807

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 12B6363_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.100	0.0550	mg/kg wet		02/28/12 10:00	02/28/12 12:31	50.0
Ethylbenzene	ND		0.100	0.0550	mg/kg wet		02/28/12 10:00	02/28/12 12:31	50.0
Naphthalene	ND		0.250	0.125	mg/kg wet		02/28/12 10:00	02/28/12 12:31	50.0
Toluene	ND		0.100	0.0550	mg/kg wet		02/28/12 10:00	02/28/12 12:31	50.0
Xylenes, total	ND		0.250	0.125	mg/kg wet		02/28/12 10:00	02/28/12 12:31	50.0

Surrogate	Blank %Recovery	Blank Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	82		70 - 130	02/28/12 10:00	02/28/12 12:31	50.0
Dibromofluoromethane	89		70 - 130	02/28/12 10:00	02/28/12 12:31	50.0
Toluene-d8	107		70 - 130	02/28/12 10:00	02/28/12 12:31	50.0
4-Bromofluorobenzene	105		70 - 130	02/28/12 10:00	02/28/12 12:31	50.0

Lab Sample ID: 12B6363-BS1

Matrix: Soil

Analysis Batch: V003807

Client Sample ID: Lab Control Sample

Prep Type: Total

Prep Batch: 12B6363_P

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	Limits
Benzene	50.0	47.4		ug/kg		95	75 - 127
Ethylbenzene	50.0	54.4		ug/kg		109	80 - 134
Naphthalene	50.0	50.0		ug/kg		100	69 - 150
Toluene	50.0	52.6		ug/kg		105	80 - 132
Xylenes, total	150	159		ug/kg		106	80 - 137

Surrogate	LCS %Recovery	LCS Qualifier	Limits
1,2-Dichloroethane-d4	84		70 - 130
Dibromofluoromethane	91		70 - 130
Toluene-d8	106		70 - 130
4-Bromofluorobenzene	102		70 - 130

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B (Continued)

Lab Sample ID: 12B7052-BLK1

Matrix: Soil

Analysis Batch: V003553

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 12B7052_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00200	0.00110	mg/kg wet		02/27/11 10:02	02/27/12 12:06	1.00
Ethylbenzene	ND		0.00200	0.00110	mg/kg wet		02/27/11 10:02	02/27/12 12:06	1.00
Naphthalene	ND		0.00500	0.00250	mg/kg wet		02/27/11 10:02	02/27/12 12:06	1.00
Toluene	ND		0.00200	0.00110	mg/kg wet		02/27/11 10:02	02/27/12 12:06	1.00
Xylenes, total	ND		0.00500	0.00250	mg/kg wet		02/27/11 10:02	02/27/12 12:06	1.00

Surrogate	Blank %Recovery	Blank Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	86		70 - 130	02/27/11 10:02	02/27/12 12:06	1.00
Dibromofluoromethane	90		70 - 130	02/27/11 10:02	02/27/12 12:06	1.00
Toluene-d8	105		70 - 130	02/27/11 10:02	02/27/12 12:06	1.00
4-Bromofluorobenzene	104		70 - 130	02/27/11 10:02	02/27/12 12:06	1.00

Lab Sample ID: 12B7052-BLK2

Matrix: Soil

Analysis Batch: V003553

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 12B7052_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.100	0.0550	mg/kg wet		02/27/11 10:02	02/27/12 12:36	50.0
Ethylbenzene	ND		0.100	0.0550	mg/kg wet		02/27/11 10:02	02/27/12 12:36	50.0
Naphthalene	ND		0.250	0.125	mg/kg wet		02/27/11 10:02	02/27/12 12:36	50.0
Toluene	ND		0.100	0.0550	mg/kg wet		02/27/11 10:02	02/27/12 12:36	50.0
Xylenes, total	ND		0.250	0.125	mg/kg wet		02/27/11 10:02	02/27/12 12:36	50.0

Surrogate	Blank %Recovery	Blank Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4	90		70 - 130	02/27/11 10:02	02/27/12 12:36	50.0
Dibromofluoromethane	91		70 - 130	02/27/11 10:02	02/27/12 12:36	50.0
Toluene-d8	107		70 - 130	02/27/11 10:02	02/27/12 12:36	50.0
4-Bromofluorobenzene	105		70 - 130	02/27/11 10:02	02/27/12 12:36	50.0

Lab Sample ID: 12B7052-BS1

Matrix: Soil

Analysis Batch: V003553

Client Sample ID: Lab Control Sample

Prep Type: Total

Prep Batch: 12B7052_P

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	Limits
Benzene	50.0	47.6		ug/kg		95	75 - 127
Ethylbenzene	50.0	53.5		ug/kg		107	80 - 134
Naphthalene	50.0	48.2		ug/kg		96	69 - 150
Toluene	50.0	52.2		ug/kg		104	80 - 132
Xylenes, total	150	158		ug/kg		105	80 - 137

Surrogate	LCS %Recovery	LCS Qualifier	Limits
1,2-Dichloroethane-d4	90		70 - 130
Dibromofluoromethane	95		70 - 130
Toluene-d8	106		70 - 130
4-Bromofluorobenzene	100		70 - 130

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Method: SW846 8260B - Volatile Organic Compounds by EPA Method 8260B (Continued)

Lab Sample ID: 12B7052-MS1

Matrix: Soil

Analysis Batch: V003553

Client Sample ID: Matrix Spike

Prep Type: Total

Prep Batch: 12B7052_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Result	Matrix Spike Qualifier	Unit	D	%Rec	Limits
Benzene	ND		2.32	2.41		mg/kg wet		104	31 - 143
Ethylbenzene	ND		2.32	2.98		mg/kg wet		128	23 - 161
Naphthalene	ND		2.32	2.78		mg/kg wet		119	10 - 176
Toluene	ND		2.32	2.91		mg/kg wet		125	30 - 155
Xylenes, total	0.135		6.97	8.67		mg/kg wet		122	25 - 162

Surrogate	Matrix Spike %Recovery	Matrix Spike Qualifier	Limits
1,2-Dichloroethane-d4	81		70 - 130
Dibromofluoromethane	90		70 - 130
Toluene-d8	111		70 - 130
4-Bromofluorobenzene	100		70 - 130

Lab Sample ID: 12B7052-MSD1

Matrix: Soil

Analysis Batch: V003553

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total

Prep Batch: 12B7052_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Dup Result	Matrix Spike Dup Qualifier	Unit	D	%Rec	Limits	RPD	Limit
Benzene	ND		2.32	2.40		mg/kg wet		103	31 - 143	0.5	50
Ethylbenzene	ND		2.32	2.97		mg/kg wet		128	23 - 161	0.3	50
Naphthalene	ND		2.32	2.64		mg/kg wet		114	10 - 176	5	50
Toluene	ND		2.32	2.82		mg/kg wet		121	30 - 155	3	50
Xylenes, total	0.135		6.97	8.71		mg/kg wet		123	25 - 162	0.5	50

Surrogate	Matrix Spike Dup %Recovery	Matrix Spike Dup Qualifier	Limits
1,2-Dichloroethane-d4	80		70 - 130
Dibromofluoromethane	89		70 - 130
Toluene-d8	106		70 - 130
4-Bromofluorobenzene	101		70 - 130

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D

Lab Sample ID: 12B6382-BLK1

Matrix: Soil

Analysis Batch: 12B6382

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 12B6382_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Acenaphthylene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Anthracene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Benzo (a) anthracene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Benzo (a) pyrene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Benzo (b) fluoranthene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Benzo (g,h,i) perylene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Benzo (k) fluoranthene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Chrysene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Dibenz (a,h) anthracene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Fluoranthene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Fluorene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Indeno (1,2,3-cd) pyrene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D (Continued)

Lab Sample ID: 12B6382-BLK1

Matrix: Soil

Analysis Batch: 12B6382

Client Sample ID: Method Blank

Prep Type: Total

Prep Batch: 12B6382_P

Analyte	Blank Result	Blank Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Naphthalene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Phenanthrene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
Pyrene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
1-Methylnaphthalene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00
2-Methylnaphthalene	ND		0.0670	0.0340	mg/kg wet		02/27/12 12:30	03/01/12 13:35	1.00

Surrogate	Blank %Recovery	Blank Qualifier	Limits	Prepared	Analyzed	Dil Fac
Terphenyl-d14	89		18 - 120	02/27/12 12:30	03/01/12 13:35	1.00
2-Fluorobiphenyl	68		14 - 120	02/27/12 12:30	03/01/12 13:35	1.00
Nitrobenzene-d5	68		17 - 120	02/27/12 12:30	03/01/12 13:35	1.00

Lab Sample ID: 12B6382-BS1

Matrix: Soil

Analysis Batch: 12B6382

Client Sample ID: Lab Control Sample

Prep Type: Total

Prep Batch: 12B6382_P

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	Limits
Acenaphthene	1.67	1.26		mg/kg wet		76	36 - 120
Acenaphthylene	1.67	1.12		mg/kg wet		67	38 - 120
Anthracene	1.67	1.39		mg/kg wet		83	46 - 124
Benzo (a) anthracene	1.67	1.51		mg/kg wet		90	45 - 120
Benzo (a) pyrene	1.67	1.53		mg/kg wet		92	45 - 120
Benzo (b) fluoranthene	1.67	1.48		mg/kg wet		89	42 - 120
Benzo (g,h,i) perylene	1.67	1.41		mg/kg wet		85	38 - 120
Benzo (k) fluoranthene	1.67	1.39		mg/kg wet		83	42 - 120
Chrysene	1.67	1.44		mg/kg wet		87	43 - 120
Dibenz (a,h) anthracene	1.67	1.42		mg/kg wet		85	32 - 128
Fluoranthene	1.67	1.41		mg/kg wet		85	46 - 120
Fluorene	1.67	1.20		mg/kg wet		72	42 - 120
Indeno (1,2,3-cd) pyrene	1.67	1.42		mg/kg wet		85	41 - 121
Naphthalene	1.67	1.25		mg/kg wet		75	32 - 120
Phenanthrene	1.67	1.46		mg/kg wet		88	45 - 120
Pyrene	1.67	1.49		mg/kg wet		89	43 - 120
1-Methylnaphthalene	1.67	0.882		mg/kg wet		53	32 - 120
2-Methylnaphthalene	1.67	1.18		mg/kg wet		71	28 - 120

Surrogate	LCS %Recovery	LCS Qualifier	Limits
Terphenyl-d14	83		18 - 120
2-Fluorobiphenyl	60		14 - 120
Nitrobenzene-d5	57		17 - 120

Lab Sample ID: 12B6382-MS1

Matrix: Soil

Analysis Batch: 12B6382

Client Sample ID: Matrix Spike

Prep Type: Total

Prep Batch: 12B6382_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Result	Matrix Spike Qualifier	Unit	D	%Rec	Limits
Acenaphthene	ND		1.92	1.35		mg/kg dry	☒	71	19 - 120
Acenaphthylene	ND		1.92	1.17		mg/kg dry	☒	61	25 - 120
Anthracene	ND		1.92	1.47		mg/kg dry	☒	77	28 - 125
Benzo (a) anthracene	0.0465		1.92	1.58		mg/kg dry	☒	80	23 - 120

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Method: SW846 8270D - Polyaromatic Hydrocarbons by EPA 8270D (Continued)

Lab Sample ID: 12B6382-MS1

Matrix: Soil

Analysis Batch: 12B6382

Client Sample ID: Matrix Spike

Prep Type: Total

Prep Batch: 12B6382_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Result	Matrix Spike Qualifier	Unit	D	%Rec	Limits
Benzo (a) pyrene	0.0407		1.92	1.72		mg/kg dry	☼	87	15 - 128
Benzo (b) fluoranthene	0.0423		1.92	1.85		mg/kg dry	☼	94	12 - 133
Benzo (g,h,i) perylene	ND		1.92	1.59		mg/kg dry	☼	83	22 - 120
Benzo (k) fluoranthene	0.0446		1.92	1.67		mg/kg dry	☼	85	28 - 120
Chrysene	0.0457		1.92	1.55		mg/kg dry	☼	78	20 - 120
Dibenz (a,h) anthracene	ND		1.92	1.62		mg/kg dry	☼	84	12 - 128
Fluoranthene	0.0830		1.92	1.54		mg/kg dry	☼	76	10 - 143
Fluorene	ND		1.92	1.24		mg/kg dry	☼	65	20 - 120
Indeno (1,2,3-cd) pyrene	ND		1.92	1.61		mg/kg dry	☼	84	22 - 121
Naphthalene	ND		1.92	1.38		mg/kg dry	☼	72	10 - 120
Phenanthrene	ND		1.92	1.54		mg/kg dry	☼	80	21 - 122
Pyrene	0.0784		1.92	1.68		mg/kg dry	☼	83	20 - 123
1-Methylnaphthalene	ND		1.92	1.01		mg/kg dry	☼	53	10 - 120
2-Methylnaphthalene	ND		1.92	1.21		mg/kg dry	☼	63	13 - 120

Surrogate	Matrix Spike %Recovery	Matrix Spike Qualifier	Limits
Terphenyl-d14	80		18 - 120
2-Fluorobiphenyl	60		14 - 120
Nitrobenzene-d5	58		17 - 120

Lab Sample ID: 12B6382-MSD1

Matrix: Soil

Analysis Batch: 12B6382

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total

Prep Batch: 12B6382_P

Analyte	Sample Result	Sample Qualifier	Spike Added	Matrix Spike Dup Result	Matrix Spike Dup Qualifier	Unit	D	%Rec	Limits	RPD	Limit
Acenaphthene	ND		1.92	1.42		mg/kg dry	☼	74	19 - 120	5	50
Acenaphthylene	ND		1.92	1.18		mg/kg dry	☼	62	25 - 120	1	50
Anthracene	ND		1.92	1.45		mg/kg dry	☼	76	28 - 125	2	49
Benzo (a) anthracene	0.0465		1.92	1.64		mg/kg dry	☼	83	23 - 120	3	50
Benzo (a) pyrene	0.0407		1.92	1.67		mg/kg dry	☼	85	15 - 128	3	50
Benzo (b) fluoranthene	0.0423		1.92	1.77		mg/kg dry	☼	90	12 - 133	4	50
Benzo (g,h,i) perylene	ND		1.92	1.45		mg/kg dry	☼	76	22 - 120	9	50
Benzo (k) fluoranthene	0.0446		1.92	1.61		mg/kg dry	☼	82	28 - 120	4	45
Chrysene	0.0457		1.92	1.58		mg/kg dry	☼	80	20 - 120	2	49
Dibenz (a,h) anthracene	ND		1.92	1.48		mg/kg dry	☼	77	12 - 128	9	50
Fluoranthene	0.0830		1.92	1.72		mg/kg dry	☼	86	10 - 143	11	50
Fluorene	ND		1.92	1.34		mg/kg dry	☼	70	20 - 120	8	50
Indeno (1,2,3-cd) pyrene	ND		1.92	1.50		mg/kg dry	☼	78	22 - 121	7	50
Naphthalene	ND		1.92	1.35		mg/kg dry	☼	70	10 - 120	3	50
Phenanthrene	ND		1.92	1.66		mg/kg dry	☼	87	21 - 122	8	50
Pyrene	0.0784		1.92	1.82		mg/kg dry	☼	91	20 - 123	8	50
1-Methylnaphthalene	ND		1.92	1.03		mg/kg dry	☼	54	10 - 120	2	50
2-Methylnaphthalene	ND		1.92	1.27		mg/kg dry	☼	66	13 - 120	5	50

Surrogate	Matrix Spike Dup %Recovery	Matrix Spike Dup Qualifier	Limits
Terphenyl-d14	76		18 - 120
2-Fluorobiphenyl	59		14 - 120
Nitrobenzene-d5	58		17 - 120

QC Sample Results

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Method: SW-846 - General Chemistry Parameters

Lab Sample ID: 12B6536-DUP1

Matrix: Soil

Analysis Batch: 12B6536

Client Sample ID: Duplicate

Prep Type: Total

Prep Batch: 12B6536_P

Analyte	Sample	Sample	Duplicate	Duplicate	Unit	D	RPD	Limit
	Result	Qualifier	Result	Qualifier				
% Dry Solids	78.0		78.1		%		0.1	20

QC Association Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

GCMS Volatiles

Analysis Batch: V003553

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B7052-BLK1	Method Blank	Total	Soil	SW846 8260B	12B7052_P
12B7052-BLK2	Method Blank	Total	Soil	SW846 8260B	12B7052_P
12B7052-BS1	Lab Control Sample	Total	Soil	SW846 8260B	12B7052_P
12B7052-MS1	Matrix Spike	Total	Soil	SW846 8260B	12B7052_P
12B7052-MSD1	Matrix Spike Duplicate	Total	Soil	SW846 8260B	12B7052_P
NWB3548-01	348 Ash	Total	Soil	SW846 8260B	12B7052_P

Analysis Batch: V003807

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B6363-BLK1	Method Blank	Total	Soil	SW846 8260B	12B6363_P
12B6363-BLK2	Method Blank	Total	Soil	SW846 8260B	12B6363_P
12B6363-BS1	Lab Control Sample	Total	Soil	SW846 8260B	12B6363_P
NWB3548-01 - RE1	348 Ash	Total	Soil	SW846 8260B	12B6363_P
NWB3548-02 - RE1	344 Ash-1	Total	Soil	SW846 8260B	12B6363_P
NWB3548-03 - RE1	344 Ash-2	Total	Soil	SW846 8260B	12B6363_P
NWB3548-03 - RE2	344 Ash-2	Total	Soil	SW846 8260B	12B6363_P

Prep Batch: 12B6363_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B6363-BLK1	Method Blank	Total	Soil	EPA 5035	
12B6363-BLK2	Method Blank	Total	Soil	EPA 5035	
12B6363-BS1	Lab Control Sample	Total	Soil	EPA 5035	
NWB3548-01 - RE1	348 Ash	Total	Soil	EPA 5035	
NWB3548-02 - RE1	344 Ash-1	Total	Soil	EPA 5035	
NWB3548-03 - RE1	344 Ash-2	Total	Soil	EPA 5035	
NWB3548-03 - RE2	344 Ash-2	Total	Soil	EPA 5035	

Prep Batch: 12B7052_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B7052-BLK1	Method Blank	Total	Soil	EPA 5035	
12B7052-BLK2	Method Blank	Total	Soil	EPA 5035	
12B7052-BS1	Lab Control Sample	Total	Soil	EPA 5035	
12B7052-MS1	Matrix Spike	Total	Soil	EPA 5035	
12B7052-MSD1	Matrix Spike Duplicate	Total	Soil	EPA 5035	
NWB3548-01	348 Ash	Total	Soil	EPA 5035	

GCMS Semivolatiles

Analysis Batch: 12B6382

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B6382-BLK1	Method Blank	Total	Soil	SW846 8270D	12B6382_P
12B6382-BS1	Lab Control Sample	Total	Soil	SW846 8270D	12B6382_P
12B6382-MS1	Matrix Spike	Total	Soil	SW846 8270D	12B6382_P
12B6382-MSD1	Matrix Spike Duplicate	Total	Soil	SW846 8270D	12B6382_P
NWB3548-01	348 Ash	Total	Soil	SW846 8270D	12B6382_P
NWB3548-02	344 Ash-1	Total	Soil	SW846 8270D	12B6382_P
NWB3548-02 - RE1	344 Ash-1	Total	Soil	SW846 8270D	12B6382_P
NWB3548-03	344 Ash-2	Total	Soil	SW846 8270D	12B6382_P

Prep Batch: 12B6382_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B6382-BLK1	Method Blank	Total	Soil	EPA 3550C	

QC Association Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

GCMS Semivolatiles (Continued)

Prep Batch: 12B6382_P (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B6382-BS1	Lab Control Sample	Total	Soil	EPA 3550C	
12B6382-MS1	Matrix Spike	Total	Soil	EPA 3550C	
12B6382-MSD1	Matrix Spike Duplicate	Total	Soil	EPA 3550C	
NWB3548-01	348 Ash	Total	Soil	EPA 3550C	
NWB3548-02	344 Ash-1	Total	Soil	EPA 3550C	
NWB3548-02 - RE1	344 Ash-1	Total	Soil	EPA 3550C	
NWB3548-03	344 Ash-2	Total	Soil	EPA 3550C	

Extractions

Analysis Batch: 12B6536

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B6536-DUP1	Duplicate	Total	Soil	SW-846	12B6536_P
NWB3548-01	348 Ash	Total	Soil	SW-846	12B6536_P
NWB3548-02	344 Ash-1	Total	Soil	SW-846	12B6536_P
NWB3548-03	344 Ash-2	Total	Soil	SW-846	12B6536_P

Prep Batch: 12B6536_P

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
12B6536-DUP1	Duplicate	Total	Soil	% Solids	
NWB3548-01	348 Ash	Total	Soil	% Solids	
NWB3548-02	344 Ash-1	Total	Soil	% Solids	
NWB3548-03	344 Ash-2	Total	Soil	% Solids	

Lab Chronicle

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Client Sample ID: 348 Ash

Date Collected: 02/21/12 14:30

Date Received: 02/25/12 08:30

Lab Sample ID: NWB3548-01

Matrix: Soil

Percent Solids: 79.9

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total	Prep	EPA 5035		0.833	12B7052_P	02/21/12 14:30	AAN	TAL NSH
Total	Analysis	SW846 8260B		1.00	V003553	02/27/12 19:09	KKK	TAL NSH
Total	Prep	EPA 5035	RE1	0.831	12B6363_P	02/21/12 14:30	AAN	TAL NSH
Total	Analysis	SW846 8260B	RE1	50.0	V003807	02/28/12 14:01	KKK	TAL NSH
Total	Prep	EPA 3550C		0.994	12B6382_P	02/27/12 12:30	RCH2	TAL NSH
Total	Analysis	SW846 8270D		1.00	12B6382	03/01/12 17:59	BES	TAL NSH
Total	Prep	% Solids		1.00	12B6536_P	02/27/12 12:43	RRS	TAL NSH
Total	Analysis	SW-846		1.00	12B6536	02/28/12 09:26	RRS	TAL NSH

Client Sample ID: 344 Ash-1

Date Collected: 02/22/12 13:30

Date Received: 02/25/12 08:30

Lab Sample ID: NWB3548-02

Matrix: Soil

Percent Solids: 73.9

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total	Prep	EPA 5035	RE1	1.12	12B6363_P	02/22/12 13:30	AAN	TAL NSH
Total	Analysis	SW846 8260B	RE1	50.0	V003807	02/28/12 14:31	KKK	TAL NSH
Total	Prep	EPA 3550C		0.973	12B6382_P	02/27/12 12:30	RCH2	TAL NSH
Total	Analysis	SW846 8270D		1.00	12B6382	03/01/12 18:24	BES	TAL NSH
Total	Prep	EPA 3550C	RE1	0.973	12B6382_P	02/27/12 12:30	RCH2	TAL NSH
Total	Analysis	SW846 8270D	RE1	2.00	12B6382	03/02/12 00:00	BES	TAL NSH
Total	Prep	% Solids		1.00	12B6536_P	02/27/12 12:43	RRS	TAL NSH
Total	Analysis	SW-846		1.00	12B6536	02/28/12 09:26	RRS	TAL NSH

Client Sample ID: 344 Ash-2

Date Collected: 02/22/12 14:30

Date Received: 02/25/12 08:30

Lab Sample ID: NWB3548-03

Matrix: Soil

Percent Solids: 83.8

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total	Prep	EPA 5035	RE1	0.678	12B6363_P	02/22/12 14:30	AAN	TAL NSH
Total	Analysis	SW846 8260B	RE1	1.00	V003807	02/28/12 13:01	KKK	TAL NSH
Total	Prep	EPA 5035	RE2	0.879	12B6363_P	02/22/12 14:30	AAN	TAL NSH
Total	Analysis	SW846 8260B	RE2	50.0	V003807	02/28/12 13:31	KKK	TAL NSH
Total	Prep	EPA 3550C		0.994	12B6382_P	02/27/12 12:30	RCH2	TAL NSH
Total	Analysis	SW846 8270D		1.00	12B6382	03/01/12 18:48	BES	TAL NSH
Total	Prep	% Solids		1.00	12B6536_P	02/27/12 12:43	RRS	TAL NSH
Total	Analysis	SW-846		1.00	12B6536	02/28/12 09:26	RRS	TAL NSH

Laboratory References:

TAL NSH = TestAmerica Nashville, 2960 Foster Creighton Road, Nashville, TN 37204, TEL 800-765-0980

Method Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Method	Method Description	Protocol	Laboratory
SW-846	General Chemistry Parameters		TAL NSH
SW846 8260B	Volatile Organic Compounds by EPA Method 8260B		TAL NSH
SW846 8270D	Polycyclic Aromatic Hydrocarbons by EPA 8270D		TAL NSH

Protocol References:

Laboratory References:

TAL NSH = TestAmerica Nashville, 2960 Foster Creighton Road, Nashville, TN 37204, TEL 800-765-0980

Certification Summary

Client: EEG - Small Business Group, Inc. (2449)
Project/Site: [none]

TestAmerica Job ID: NWB3548

Laboratory	Authority	Program	EPA Region	Certification ID
TestAmerica Nashville		ACIL		393
TestAmerica Nashville	A2LA	ISO/IEC 17025		0453.07
TestAmerica Nashville	Alabama	State Program	4	41150
TestAmerica Nashville	Alaska (UST)	State Program	10	UST-087
TestAmerica Nashville	Arizona	State Program	9	AZ0473
TestAmerica Nashville	Arkansas DEQ	State Program	6	88-0737
TestAmerica Nashville	California	NELAC	9	1168CA
TestAmerica Nashville	Canadian Assoc Lab Accred (CALA)	Canada		3744
TestAmerica Nashville	Colorado	State Program	8	N/A
TestAmerica Nashville	Connecticut	State Program	1	PH-0220
TestAmerica Nashville	Florida	NELAC	4	E87358
TestAmerica Nashville	Illinois	NELAC	5	200010
TestAmerica Nashville	Iowa	State Program	7	131
TestAmerica Nashville	Kansas	NELAC	7	E-10229
TestAmerica Nashville	Kentucky	State Program	4	90038
TestAmerica Nashville	Kentucky (UST)	State Program	4	19
TestAmerica Nashville	Louisiana	NELAC	6	30613
TestAmerica Nashville	Louisiana	NELAC	6	LA110014
TestAmerica Nashville	Maryland	State Program	3	316
TestAmerica Nashville	Massachusetts	State Program	1	M-TN032
TestAmerica Nashville	Mississippi	State Program	4	N/A
TestAmerica Nashville	Montana (UST)	State Program	8	NA
TestAmerica Nashville	New Hampshire	NELAC	1	2963
TestAmerica Nashville	New Jersey	NELAC	2	TN965
TestAmerica Nashville	New York	NELAC	2	11342
TestAmerica Nashville	North Carolina DENR	State Program	4	387
TestAmerica Nashville	North Dakota	State Program	8	R-146
TestAmerica Nashville	Ohio VAP	State Program	5	CL0033
TestAmerica Nashville	Oklahoma	State Program	6	9412
TestAmerica Nashville	Oregon	NELAC	10	TN200001
TestAmerica Nashville	Pennsylvania	NELAC	3	68-00585
TestAmerica Nashville	Rhode Island	State Program	1	LAO00268
TestAmerica Nashville	South Carolina	State Program	4	84009
TestAmerica Nashville	South Carolina	State Program	4	84009
TestAmerica Nashville	Tennessee	State Program	4	2008
TestAmerica Nashville	Texas	NELAC	6	T104704077-09-TX
TestAmerica Nashville	USDA	Federal		S-48469
TestAmerica Nashville	Utah	NELAC	8	TAN
TestAmerica Nashville	Virginia	NELAC Secondary AB	3	460152
TestAmerica Nashville	Virginia	State Program	3	00323
TestAmerica Nashville	Washington	State Program	10	C789
TestAmerica Nashville	West Virginia DEP	State Program	3	219
TestAmerica Nashville	Wisconsin	State Program	5	998020430
TestAmerica Nashville	Wyoming (UST)	A2LA	8	453.07

Accreditation may not be offered or required for all methods and analytes reported in this package. Please contact your project manager for the laboratory's current list of certified methods and analytes.



ATTACHMENT A

UST Certificate of Disposal

CONTRACTOR

Small Business Group, Inc.
10179 Highway 78
Ladson, SC 29456

TEL (843) 879-0403
FAX (843) 879-0401

TANK ID & LOCATION

UST 348Ash; 348 Ash Street, Laurel Bay Housing Area, MCAS Beaufort, S.C.

DISPOSAL LOCATION

Coastal Auto Salvage Co., Inc.
130 Laurel Bay Road
Beaufort, S.C. 29906

TYPE OF TANK

Steel

SIZE (GAL)

280

CLEANING/DISPOSAL METHOD

The tank and piping were unearthed, cut open, cleaned with a pressure washer, cut into sections, and recycled.

DISPOSAL CERTIFICATION

I certify that the above tank, piping and equipment has been properly cleaned and disposed of.

T.R. L. L. L. / 3/14/12
(Name) (Date)

Appendix C
Laboratory Analytical Report - Groundwater

Volatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants	Laboratory ID: QF02019-009
Description: BEALB348TW01WG20150601	Matrix: Aqueous
Date Sampled: 06/01/2015 1755	
Date Received: 06/03/2015	

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch
1	5030B	8260B	1	06/04/2015 1338	EH1		76528

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	LOD	DL	Units	Run
Benzene	71-43-2	8260B	0.45	U	5.0	0.45	0.21	ug/L	1
Ethylbenzene	100-41-4	8260B	0.51	U	5.0	0.51	0.17	ug/L	1
Naphthalene	91-20-3	8260B	0.96	U	5.0	0.96	0.32	ug/L	1
Toluene	108-88-3	8260B	0.48	U	5.0	0.48	0.16	ug/L	1
Xylenes (total)	1330-20-7	8260B	0.57	U	5.0	0.57	0.19	ug/L	1

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
Bromofluorobenzene		102	75-120
1,2-Dichloroethane-d4		97	70-120
Toluene-d8		98	85-120
Dibromofluoromethane		102	85-115

PQL = Practical quantitation limit B = Detected in the method blank E = Quantitation of compound exceeded the calibration range H = Out of holding time Q = Surrogate failure
 ND = Not detected at or above the MDL J = Estimated result < PQL and ≥ MDL P = The RPD between two GC columns exceeds 40% N = Recovery is out of criteria L = LCS/LCSD failure
 Where applicable, all soil sample analysis are reported on a dry weight basis unless flagged with a "W" S = MS/MSD failure

Shealy Environmental Services, Inc.
 106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.shealylab.com

Level 1 Report v2.1

Semivolatile Organic Compounds by GC/MS (SIM)

Client: **AECOM - Resolution Consultants**Laboratory ID: **QF02019-009**Description: **BEALB348TW01WG20150601**Matrix: **Aqueous**Date Sampled: **06/01/2015 1755**Date Received: **06/03/2015**

Run	Prep Method	Analytical Method	Dilution	Analysis Date	Analyst	Prep Date	Batch				
1	3520C	8270D (SIM)	1	06/08/2015 1407	RBH	06/05/2015 1740	76658				
Parameter			CAS Number	Analytical Method	Result	Q	LOQ	LOD	DL	Units	Run
Benzo(a)anthracene			56-55-3	8270D (SIM)	0.040	U	0.20	0.040	0.019	ug/L	1
Benzo(b)fluoranthene			205-99-2	8270D (SIM)	0.040	U	0.20	0.040	0.019	ug/L	1
Benzo(k)fluoranthene			207-08-9	8270D (SIM)	0.040	U	0.20	0.040	0.024	ug/L	1
Chrysene			218-01-9	8270D (SIM)	0.040	U	0.20	0.040	0.021	ug/L	1
Dibenzo(a,h)anthracene			53-70-3	8270D (SIM)	0.080	U	0.20	0.080	0.040	ug/L	1
Surrogate		Q	Run 1 % Recovery	Acceptance Limits							
2-Methylnaphthalene-d10			73	15-139							
Fluoranthene-d10			89	23-154							

PQL = Practical quantitation limit

B = Detected in the method blank

E = Quantitation of compound exceeded the calibration range

H = Out of holding time

Q = Surrogate failure

ND = Not detected at or above the MDL

J = Estimated result < PQL and ≥ MDL

P = The RPD between two GC columns exceeds 40%

N = Recovery is out of criteria

L = LCS/LCSD failure

Where applicable, all soil sample analysis are reported on a dry weight basis unless flagged with a "W"

S = MS/MSD failure

Shealy Environmental Services, Inc.

106 Vantage Point Drive West Columbia, SC 29172 (803) 791-9700 Fax (803) 791-9111 www.shealylab.com

Level 1 Report v2.1

Appendix D

Regulatory Correspondence

D H E C

PROMOTE PROTECT PROSPER

Catherine B. Templeton, Director

May 15, 2014

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United State Marine Corps Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: IGWA
Laurel Bay Underground Storage Tank Assessment Reports for:
See attached sheet

Dear Mr. Drawdy,


The South Carolina Department of Health and Environmental Control (the Department) received the above referenced Underground Storage Tank Assessment Reports for the addresses listed above. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

The Department has reviewed the referenced assessment reports. The submitted analytical results indicate that petroleum constituents are above established Risk-Based Screening Levels and additional investigation is warranted. Specifically, the Department requests that a groundwater sampling proposal be generated to determine if there has been an impact to groundwater at this site.

Please note that the Department's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary.

If you have any questions, please contact me at kriegkm@dhec.sc.gov or 803-898-0255.

Sincerely,



Kent Krieg
Department of Defense Corrective Action Section
Bureau of Land and Waste Management
South Carolina Department of Health and Environmental Control

Cc: Russell Berry (via email)
Craig Ehde (via email)

D H E C

PROMOTE PROTECT PROSPER

Catherine B. Templeton, Director

Attachment to: Krieg to Drawdy
Subject: IGWA
Dated 5/15/2014

Laurel Bay Underground Storage Tank Assessment Reports for: (121 addresses/139 tanks)

137 Laurel Bay Tank 2	387 Acorn
139 Laurel Bay	392 Acorn Tank 2
229 Cypress Tank 2	396 Acorn Tank 1
261 Beech Tank 1	396 Acorn Tank 2
261 Beech Tank 3	430 Elderberry
273 Birch Tank 1	433 Elderberry
273 Birch Tank 2	439 Elderberry
273 Birch Tank 3	440 Elderberry
276 Birch Tank 2	442 Elderberry
278 Birch Tank 2	443 Elderberry
291 Birch Tank 2	444 Elderberry Tank 1
300 Ash	445 Elderberry
304 Ash	446 Elderberry
314 Ash Tank 1	448 Elderberry
314 Ash Tank 2	449 Elderberry
322 Ash Tank 2	451 Elderberry
323 Ash	453 Elderberry
324 Ash	456 Elderberry Tank 1
325 Ash Tank 1	456 Elderberry Tank 2
325 Ash Tank 2	458 Elderberry Tank 1
326 Ash	458 Elderberry Tank 3
336 Ash	464 Dogwood
339 Ash	466 Dogwood
343 Ash Tank 1	467 Dogwood
344 Ash Tank 1	468 Dogwood
348 Ash	469 Dogwood
349 Ash Tank 1	471 Dogwood Tank 2
353 Ash Tank 1	471 Dogwood Tank 3
362 Aspen	475 Dogwood Tank 1
376 Aspen	475 Dogwood Tank 2
380 Aspen	516 Laurel Bay Tank 1 (UST#03747)
383 Aspen Tank 2	518 Laurel Bay

Laurel Bay Underground Storage Tank Assessment Reports for: (121 addresses/139 tanks) cont.

531 Laurel Bay	1219 Cardinal
532 Laurel Bay	1272 Albatross
635 Dahlia Tank 2	1305 Eagle
638 Dahlia	1353 Cardinal
640 Dahlia Tank 1	1356 Cardinal
640 Dahlia Tank 2	1357 Cardinal
645 Dahlia	1359 Cardinal
647 Dahlia	1360 Cardinal
648 Dahlia Tank 2	1361 Cardinal
650 Dahlia Tank 1	1368 Cardinal
650 Dahlia Tank 2	1370 Cardinal Tank 1
652 Dahlia Tank 1	1377 Dove
652 Dahlia Tank 2	1381 Dove
760 Althea	1382 Dove
763 Althea	1384 Dove
771 Althea	1385 Dove
927 Albacore	1389 Dove
1015 Foxglove	1391 Dove
1046 Gardenia	1392 Dove
1062 Gardenia Tank 2	1393 Dove Tank 1
1070 Heather	1393 Dove Tank 2
1072 Heather	1406 Eagle
1102 Iris Tank 1	1407 Eagle Tank 1
1107 Iris	1411 Eagle Tank 1
1126 Iris	1411 Eagle Tank 2
1129 Iris	1412 Eagle
1132 Iris	1413 Albatross
1133 Iris Tank 1	1414 Albatross
1138 Iris	1422 Albatross
1144 Iris Tank 1	1425 Albatross
1144 Iris Tank 2	1426 Albatross
1148 Iris Tank 1	1432 Dove
1148 Iris Tank 2	1434 Dove
1161 Jasmine	1436 Dove
1167 Jasmine	1438 Dove Tank 1
1170 Jasmine	1440 Dove
1190 Bobwhite	1442 Dove Tank 1
1192 Bobwhite	



Catherine E. Heigel, Director

Promoting and protecting the health of the public and the environment

Division of Waste Management
Bureau of Land and Waste Management

February 22, 2016

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United State Marine Corps Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: Approval and Concurrence with Draft Final Initial Groundwater Investigation Report-May and June 2015
Laurel Bay Military Housing Area Multiple Properties
Dated October 2015

Dear Mr. Drawdy,

The South Carolina Department of Health and Environmental Control (the Department) received groundwater data in the above referenced Groundwater Investigation Report for the addresses attached. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

Per the Department's request, groundwater samples were collected from the attached referenced addresses. The Department reviewed the groundwater data and previous investigations and it agrees with the conclusions and recommendations included in the document. To further assess the impact to groundwater, permanent wells should be installed at the 52 stated addresses. For the remaining 91 addresses, there is no indication of contamination on the property and therefore no further investigation is required at this time.

Please note that the Department's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary.

If you have any questions, please contact me at petruslb@dhec.sc.gov or 803-898-0294.

Sincerely,

Laurel Petrus
RCRA Federal Facilities Section

Attachment: Specific Property Recommendations

Cc: Russell Berry, EQC Region 8 (via email)
Shawn Dolan, Resolution Consultants (via email)
Bryan Beck, NAVFAC MIDATLANTIC (via email)
Craig Ehde (via email)

Attachment to: Petrus to Drawdy
 Subject: Draft Final Initial Groundwater Investigation Report-May and June 2015
 Specific Property Recommendations
 Dated February 22, 2016

Draft Final Initial Groundwater Investigation Report for (143 addresses)

Permanent Monitoring Well Investigation recommendation (52 addresses)

273 Birch Drive	1192 Bobwhite Drive
325 Ash Street	1194 Bobwhite Drive
326 Ash Street	1272 Albatross Drive
336 Ash Street	1352 Cardinal Lane
343 Ash Street	1356 Cardinal Lane
353 Ash Street	1359 Cardinal Lane
430 Elderberry Drive	1360 Cardinal Lane
440 Elderberry Drive	1362 Cardinal Lane
456 Elderberry Drive	1370 Cardinal Lane
458 Elderberry Drive	1382 Dove Lane
468 Dogwood Drive	1384 Dove lane
518 Laurel Bay Blvd	1385 Dove Lane
635 Dahlia Drive	1389 Dove Lane
638 Dahlia Drive	1392 Dove Lane
640 Dahlia Drive	1393 Dove Lane
647 Dahlia Drive	1407 Eagle Lane
648 Dahlia Drive	1411 Eagle Lane
650 Dahlia Drive	1418 Albatross Drive
652 Dahlia Drive	1420 Albatross Drive
760 Althea Street	1426 Albatross Drive
1102 Iris Lane	1429 Albatross Drive
1132 Iris Lane	1434 Dove Lane
1133 Iris Lane	1436 Dove Lane
1144 Iris Lane	1440 Dove Lane
1148 Iris Lane	1442 Dove Lane
1186 Bobwhite Drive	1444 Dove Lane

No Further Action recommendation (91 addresses):

137 Laurel Bay Blvd	771 Althea Street
139 Laurel Bay Blvd	927 Albacore Street
229 Cypress Street	1015 Foxglove Street
261 Beech Street	1046 Gardenia Drive
276 Birch Drive	1062 Gardenia Drive
278 Birch Drive	1070 Heather Street
291 Birch Drive	1072 Heather Street

300 Ash Street	1107 Iris Lane
304 Ash Street	1126 Iris Lane
314 Ash Street	1129 Iris Lane
322 Ash Street	1138 Iris Lane
323 Ash Street	1161 Jasmine Street
324 Ash Street	1167 Jasmine Street
339 Ash Street	1170 Jasmine Street
344 Ash Street	1190 Bobwhite Drive
348 Ash Street	1219 Cardinal Lane
349 Ash Street	1305 Eagle Lane
362 Aspen Street	1353 Cardinal Lane
376 Aspen Street	1354 Cardinal Lane
380 Aspen Street	1357 Cardinal Lane
383 Aspen Street	1361 Cardinal Lane
387 Acorn Drive	1364 Cardinal Lane
392 Acorn Drive	1368 Cardinal Lane
396 Acorn Drive	1377 Dove Lane
433 Elderberry Drive	1381 Dove Lane
439 Elderberry Drive	1391 Dove Lane
442 Elderberry Drive	1403 Eagle Lane
443 Elderberry Drive	1404 Eagle Lane
444 Elderberry Drive	1405 Eagle Lane
445 Elderberry Drive	1406 Eagle Lane
446 Elderberry Drive	1408 Eagle Lane
448 Elderberry Drive	1410 Eagle Lane
449 Elderberry Drive	1412 Eagle Lane
451 Elderberry Drive	1413 Albatross Drive
453 Elderberry Drive	1414 Albatross Drive
464 Dogwood Drive	1417 Albatross Drive
466 Dogwood Drive	1421 Albatross Drive
467 Dogwood Drive	1422 Albatross Drive
469 Dogwood Drive	1425 Albatross Drive
471 Dogwood Drive	1427 Albatross Drive
475 Dogwood Drive	1430 Dove Lane
516 Laurel Bay Blvd	1432 Dove Lane
531 Laurel Bay Blvd	1438 Dove Lane
532 Laurel Bay Blvd	1453 Cardinal Lane
645 Dahlia Drive	1455 Cardinal Lane
763 Althea Street	