SUMMARY REPORT
279 DAHLIA DRIVE (FORMERLY 606 DAHLIA DRIVE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0 Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid-Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic 9324 Virginia Avenue Norfolk, Virginia 23511-3095 SUMMARY REPORT
279 DAHLIA DRIVE (FORMERLY 606 DAHLIA DRIVE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid- Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



**Naval Facilities Engineering Command Atlantic** 

9324 Virginia Avenue Norfolk, Virginia 23511-3095

**Prepared by:** 



CDM - AECOM Multimedia Joint Venture 10560 Arrowhead Drive, Suite 500 Fairfax, Virginia 22030

Contract Number: N62470-14-D-9016

CTO WE52

**JUNE 2021** 



# **Table of Contents**

1.0	INTRODUC	TION 1
1.1		ND INFORMATION1
1.2	UST Asses	SSMENT PROCESS
2.0	SAMPLING	ACTIVITIES AND RESULTS4
2.1		SAMPLING4
2.2 2.3		ANALYTICAL RESULTS
2.3		LING
2.5		ATER SAMPLING6
2.6	GROUNDWA	ATER ANALYTICAL RESULTS
3.0	PROPERTY	'STATUS6
4.0	REFERENC	ES
		Tables
Table	1	Laboratory Analytical Results - Vapor
Table	2	Laboratory Analytical Results - Soil
Table	3	Laboratory Analytical Results - Groundwater
		Appendices
Appen	dix A	Multi-Media Selection Process for LBMH
Appen	dix B	Laboratory Analytical Report - Vapor
Appen	dix C	Laboratory Analytical Report - Soil
Appen	dix D	Laboratory Analytical Reports - Groundwater
Appen	dix E	Regulatory Correspondence





#### **List of Acronyms**

bgs below ground surface

BTEX benzene, toluene, ethylbenzene, and xylenes

CTO Contract Task Order

COPC constituents of potential concern

ft feet

GPR ground penetrating radar

IDIQ Indefinite Delivery, Indefinite Quantity

IGWA Initial Groundwater Assessment

JV Joint Venture

LBMH Laurel Bay Military Housing MCAS Marine Corps Air Station

NAVFAC Mid-Lant Naval Facilities Engineering Command Mid-Atlantic

NFA No Further Action

PAH polynuclear aromatic hydrocarbon QAPP Quality Assurance Program Plan

RBSL risk-based screening level

SCDHEC South Carolina Department of Health and Environmental Control

Site LBMH area at MCAS Beaufort, South Carolina

UFP SAP Uniform Federal Policy Sampling and Analysis Plan USEPA United States Environmental Protection Agency

UST underground storage tank

VI vapor intrusion

VISL vapor intrusion screening level



#### 1.0 INTRODUCTION

The CDM - AECOM Multimedia Joint Venture (JV) was contracted by the Naval Facilities Engineering Command, Mid-Atlantic (NAVFAC Mid-Lant) to provide reporting services for the heating oil underground storage tanks (USTs) located in Laurel Bay Military Housing (LBMH) area at the Marine Corps Air Station (MCAS) Beaufort, South Carolina (Site). This work has been awarded under Contract Task Order (CTO) WE52 of the Indefinite Delivery, Indefinite Quantity (IDIQ) Multimedia Environmental Compliance Contract (Contract No. N62470-14-D-9016).

As of January 2014, the LBMH addresses were re-numbered to comply with the E-911 emergency response addressing system; however, in order to remain consistent with historical sampling and reporting for LBMH area, the residences will continue to be referenced with their original address numbers in sample nomenclature and reporting documents.

This report summarizes the results the environmental investigation activities associated with the storage of home heating oil and the potential release of petroleum constituents at the referenced property. Based on the results of the investigation, a No Further Action (NFA) determination has been made by the South Carolina Department of Health and Environmental Control (SCDHEC) for 279 Dahlia Drive (Formerly 606 Dahlia Drive). This NFA determination indicates that there are no unacceptable risks to human health or the environment for the petroleum constituents associated with the home heating oil USTs. The following information is included in this report:

- Background information;
- Sampling activities and results; and
- A determination of the property status.

#### 1.1 Background Information

The LBMH area is located approximately 3.5 miles west of MCAS Beaufort. The area is approximately 970 acres in size and serves as an enlisted and officer family housing area. The area is configured with single family and duplex residential structures, and includes recreation, open space, and community facilities. The community includes approximately 1,300 housing units, including legacy Capehart style homes and newer duplex style homes. The housing area is bordered on the west by salt marshes and the Broad River, and to the north, east and south by uplands. Forested areas lie along the northern and northeastern borders.





Capehart style homes within the LBMH area were formerly heated using heating oil stored in USTs at each residence. There were 1,100 Capehart style housing units in the LBMH area. The newer duplex homes within the LBMH area never utilized heating oil tanks. Heating oil has not been used at Laurel Bay since the mid-1980s. As was the accepted practice at the time, USTs were drained, filled with dirt, capped, and left in place when they were removed from service. Residential USTs are not regulated in the State of South Carolina (i.e., there are no federal or state laws governing installation, management, or removal).

In 2007, MCAS Beaufort began a voluntary program to remove the unregulated, residential USTs and conduct sampling activities to determine if, and to what extent, petroleum constituents may have impacted the surrounding environment. MCAS Beaufort coordinated with SCDHEC to develop removal procedures that were consistent with procedural requirements for regulated USTs. All tank removal activities and follow-on actions are conducted in coordination with SCDHEC. To date, all known USTs have been removed from all residential properties within the LBMH area.

MCAS Beaufort does not have documentation of the UST removal activities at 34 properties where it was discovered that a structure (i.e., home addition, garage, porch, or shed) had been historically constructed on top of the suspected former UST locations. The results of a historical document review and ground penetrating radar (GPR) survey at the 34 properties indicated there was no evidence that any of the former USTs remained in place beneath the structures and it was likely that the USTs were removed prior to 2007. The LBMH UST removal and assessment process is described below in Section 1.2. The LBMH multi-media investigation selection process tree, used to evaluate the environmental impact of USTs for most sites at LBMH, is presented in Appendix A. It should be noted that because soil and groundwater were not sampled following the UST removal and analytical results were not available for evaluation, the subject property of this report did not follow the typical multi-media investigation selection process presented in Appendix A.

#### 1.2 UST Assessment Process

As stated above, the assessment process at this property did not follow the typical process presented in Appendix A. Instead the process consisted first of a vapor intrusion (VI) assessment to evaluate the potential risk to residents at the property. Soil gas samples for the VI assessment were collected from beneath the structure in the vicinity of the suspected location of the former UST. The VI assessment was later followed by an assessment of soil and groundwater outside



the footprint of the house and in the vicinity of the suspected location of the former UST to evaluate the impact, if any, to these media.

During the VI investigation, soil gas samples were analyzed for a predetermined list of constituents of potential concern (COPCs) associated with the petroleum compounds found in home heating oil. These COPCs are as follows:


- benzene, toluene, ethylbenzene, and xylenes (BTEX), and
- naphthalene.

In accordance with the SCDHEC approved *Uniform Federal Policy Sampling and Analysis Plan* (*UFP SAP*) for Vapor Media, Revision 3 (Resolution Consultants, 2016), soil gas analytical results were compared to the United States Environmental Protection Agency (USEPA) vapor intrusion screening levels (VISLs) for soil gas (USEPA, 2016). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC. The soil gas results were used to determine whether petroleum vapors existed due to former USTs and to assess the associated risk to human health.

Following the VI investigations, soil and initial groundwater assessment (IGWA) investigations were conducted adjacent to the former UST locations at the 34 properties as an additional precautionary measure. Soil and groundwater samples collected were analyzed for a predetermined list of COPCs associated with the petroleum compounds found in home heating oil. These COPCs, derived from the *Quality Assurance Program Plan (QAPP)* for the *Underground Storage Tank Management Division, Revision 3.1* (SCDHEC, 2016) and the *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service,* (SCDHEC, 2018), are as follows:

- BTEX,
- naphthalene, and
- five select polynuclear aromatic hydrocarbon (PAHs): benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene and dibenz(a,h)anthracene.

In accordance with SCDHEC's *QAPP for the UST Management Division* (SCDHEC, 2016), the soil screening levels consists of SCDHEC risk-based screening levels (RBSLs). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC.





The results of the IGWA sampling were used to determine the presence or absence of the aforementioned COPCs in groundwater and identify whether former UST locations required additional delineation of COPCs in groundwater. Groundwater analytical results were compared to SCDHEC RBSLs for groundwater. The groundwater analytical results were also compared to the site specific groundwater VISLs as another line of evidence that VI is not a concern.

#### 2.0 SAMPLING ACTIVITIES AND RESULTS

The following section presents the sampling activities and associated results for 279 Dahlia Drive (Formerly 606 Dahlia Drive). The sampling activities at 279 Dahlia Drive (Formerly 606 Dahlia Drive) comprised a VI investigation, a soil investigation and IGWA sampling. Details regarding the VI investigation at this site are provided in the *Letter Report Petroleum Vapor Intrusion Investigations – June 2016 and January 2017, Revision 1* (Resolution Consultants, 2017). The laboratory report that includes the pertinent soil gas analytical results for this site is presented in Appendix B. Details regarding the soil and IGWA sampling activities at this site are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018). The laboratory reports that include the pertinent soil and IGWA analytical results for this site are presented in Appendices C and D, respectively.

## 2.1 Soil Gas Sampling

On June 22, 2016, a temporary near-slab vapor pin was installed and sampled at 279 Dahlia Drive (Formerly 606 Dahlia Drive) in accordance with the SCDHEC approved *UFP SAP for Vapor Media, Revision 3* (Resolution Consultants, 2016). Soil gas sampling was conducted at this property to assess the potential risk for vapor intrusion associated with the suspected location of a former UST. The near-slab vapor pin was placed in the same general location as the suspected former heating oil UST, as determined by review of historical documents and GPR analysis. Further details are provided in the *Letter Report Petroleum Vapor Intrusion Investigations – June 2016 and January 2017, Revision 1* (Resolution Consultants, 2017).

The sampling strategy for this phase of the investigation required a one-time sampling event of the near-slab vapor pin. The near-slab vapor pin at 279 Dahlia Drive (Formerly 606 Dahlia Drive) was sampled on June 22, 2016. A soil gas sample was collected and shipped to an offsite laboratory for analysis of the petroleum COPCs. Upon completion of soil gas sampling, the vapor pin was abandoned in accordance with the *UFP SAP for Vapor Media, Revision 3* (Resolution



Consultants, 2016). Field forms are provided in the *Letter Report Petroleum Vapor Intrusion Investigations – June 2016 and January 2017, Revision 1* (Resolution Consultants, 2017).

## 2.2 Soil Gas Analytical Results

A summary of the laboratory analytical results and USEPA VISLs is presented in Table 1. A copy of the laboratory analytical data report is included in Appendix B.

The soil gas results collected from 279 Dahlia Drive (Formerly 606 Dahlia Drive) were below USEPA VISLs, which indicated that the subsurface soil gas was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.

#### 2.3 Soil Sampling

On September 28, 2017, a single soil boring was advanced near the suspected former UST location at 279 Dahlia Drive (Formerly 606 Dahlia Drive). The soil boring location is indicated on Figure 29 of the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018) and was collocated with the temporary monitoring well discussed in Section 2.5. A single soil sample was collected at a depth of approximately 4 feet (ft) below ground surface (bgs). The soil sample was shipped to an offsite laboratory for analysis of the petroleum COPCs. Soil sampling was performed in accordance with the *UFP SAP for Soil and Groundwater Media* (CDM-AECOM Multimedia JV, 2017) and the applicable South Carolina regulation R.61-92, Part 280 (SCDHEC, 2017) and assessment guidelines. Field forms are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018).

#### 2.4 Soil Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 2. A copy of the laboratory analytical data report is included as Appendix C.

The soil results collected from 279 Dahlia Drive (Formerly 606 Dahlia Drive) were less than the SCDHEC RBSLs (Table 2), which indicated that the soil was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.



### 2.5 Groundwater Sampling

On September 28, 2017, the soil boring was converted into a temporary monitoring well and then sampled at 279 Dahlia Drive (Formerly 606 Dahlia Drive), in accordance with the South Carolina Well Standards and Regulations (R.61-71.H-I, updated June 24, 2016). In order to provide data that can be used to determine whether COPCs are migrating to underlying groundwater, the monitoring well was placed near the suspected location of the former heating oil UST. On September 28, 2017, two additional temporary monitoring wells were also installed and then sampled at 279 Dahlia Drive (Formerly 606 Dahlia Drive). Further details are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018).

The sampling strategy for this phase of the investigation required a one-time sampling event of the temporarily installed monitoring wells. Following well installation and development, groundwater samples were collected using low-flow methods and shipped to an offsite laboratory for analysis of the petroleum COPCs. Upon completion of groundwater sampling, the temporary wells were abandoned in accordance with the South Carolina Well Standards and Regulations R.61-71 (SCDHEC, 2016). Field forms are provided in the *Soil and Initial Groundwater Investigation Report – September and October 2017, Revision 1* (CDM-AECOM Multimedia JV, 2018).

## 2.6 Groundwater Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 3. A copy of the laboratory analytical data report is included in Appendix D.

The groundwater results collected from 279 Dahlia Drive (Formerly 606 Dahlia Drive) were less than the SCDHEC RBSLs and the site-specific groundwater VISLs (Table 3), which indicated that the groundwater was not impacted by COPCs associated with the former UST at concentrations that present a potential risk to human health and the environment.

#### 3.0 PROPERTY STATUS

Based on the analytical results for soil and groundwater, SCDHEC made the determination that NFA was required for 279 Dahlia Drive (Formerly 606 Dahlia Drive). The NFA determination for soil and groundwater was obtained in a letter dated March 29, 2018. Based on the analytical results for soil gas, it was determined that there was not a VI concern at this property and a



recommendation was made for no additional VI assessment activities. SCDHEC approved the no further VI investigation recommendation for 279 Dahlia Drive (Formerly 606 Dahlia Drive) in a letter dated June 20, 2017. SCDHEC's letters are provided in Appendix E.

#### 4.0 REFERENCES

- CDM-AECOM Multimedia JV, 2017. *Uniform Federal Policy Sampling and Analysis Plan for Soil and Groundwater Media for Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina*, July 2017.
- CDM-AECOM Multimedia JV, 2018. Soil and Initial Groundwater Investigation Report September and October 2017 for Laurel Bay Military Housing Area, Revision 1, Multiple Properties, Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina, February 2018.
- Resolution Consultants, 2016. *Uniform Federal Policy Sampling and Analysis Plan for Vapor Media* for Laurel Bay Military Housing Area, Revision 3, Multiple Properties, Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina, June 2016.
- Resolution Consultants, 2017. Letter Report Petroleum Vapor Intrusion Investigations June 2016 and January 2017 for Laurel Bay Military Housing Area, Revision 1, Multiple Properties, Laurel Bay Military Housing Area, Marine Corps Air Station Beaufort, Beaufort, South Carolina, June 2017.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2013. *Quality Assurance Program Plan for the Underground Storage Tank Management* Division, *Revision 2.0*, April 2013.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2015. *Quality Assurance Program Plan for the Underground Storage Tank Management* Division, *Revision 3.0*, May 2015.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2016. *Quality Assurance Program Plan for the Underground Storage Tank Management* Division, *Revision 3.1*, February 2016.





- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2017. *R.61-92, Part 280, Underground Storage Tank Control Regulations*, March 2017.
- South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2018. *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, March 2018.
- South Carolina Department of Health and Environmental Control Bureau of Water, 2016. *R.61-71, Well Standards*, June 2016.
- United States Environmental Protection Agency, 2016. *USEPA OSWER Vapor Intrusion Assessment, Vapor Intrusion Screening Level Calculator, Version 3.5.1,* May 2016.

# **Tables**



# Table 1 Laboratory Analytical Results - Vapor 279 Dahlia Drive (Formerly 606 Dahlia Drive) Laurel Bay Military Housing Area Marine Corps Air Station Beaufort

Beaufort, South Carolina

Constituent	USEPA VISL (1)	Results Sample Collected 06/22/16								
Volatile Organic Compounds Analyzed by USEPA Method TO-15 (μg/m³)										
Benzene	12	5.6								
Toluene	17000	2.8								
Ethylbenzene	37	ND								
m,p-Xylenes	350	ND								
m,p-Xylenes o-Xylene	350	ND								
Naphthalene	2.8	ND								

#### Notes:

VISLs are based on a residual exposure scenario and a target risk level of  $1x10^{-6}$  and a hazard quotient of 0.1. Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the residential VISL.

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The vapor laboratory report is provided in Appendix B.

USEPA - United States Environmental Protection Agency

μg/m<sup>3</sup> - micrograms per cubic meter

VISL - Vapor Intrusion Screening Level

<sup>&</sup>lt;sup>(1)</sup> United States Environmental Protection Agency Exterior Soil Gas Vapor Intrusion Screening Level (VISL) from VISL Calculator (Version 3.5.1, May 2016).

# Table 2 Laboratory Analytical Results - Soil 279 Dahlia Drive (Formerly 606 Dahlia Drive) Laurel Bay Military Housing Area Marine Corps Air Station Beaufort Beaufort, South Carolina

Constituent	SCDHEC RBSLs (1)	Results Sample Collected 09/28/17
Volatile Organic Compounds Analyze	d by EPA Method 8260B (mg/kg)	
Benzene	0.007	ND
Ethylbenzene	1.15	ND
Naphthalene	0.036	ND
Toluene	1.45	ND
Xylenes, Total	14.5	ND
Semivolatile Organic Compounds Ana	alyzed by EPA Method 8270D (mg/kg)	
Benzo(a)anthracene	0.066	ND
Benzo(b)fluoranthene	0.066	ND
Benzo(k)fluoranthene	0.066	ND
Chrysene	0.066	ND
Dibenz(a,h)anthracene	0.066	ND

#### Notes:

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL.

EPA - United States Environmental Protection Agency

mg/kg - milligrams per kilogram

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The soil laboratory report is provided in Appendix C.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

<sup>(1)</sup> South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1 (SCDHEC, February 2016).

# Table 3 Laboratory Analytical Results - Groundwater 279 Dahlia Drive (Formerly 606 Dahlia Drive) Laurel Bay Military Housing Area Marine Corps Air Station Beaufort Beaufort, South Carolina

Constituent	SCDHEC RBSLs (1)	Site-Specific Groundwater VISLs	Results Samples Collected 09/29/17							
		(μg/L) <sup>(2)</sup>		TW02	TW03					
Volatile Organic Compounds Analyzed by EPA Method 8260B (μg/L)										
Benzene	5	16.24	ND	ND	ND					
Ethylbenzene	700	45.95	ND	ND	ND					
Naphthalene	25	29.33	ND	ND	ND					
Toluene	1000	105,445	ND	ND	ND					
Xylenes, Total	10,000	2,133	ND	ND	ND					
Semivolatile Organic Compounds Ar	nalyzed by EPA Method 827	0D (μg/L)								
Benzo(a)anthracene	10	NA	ND	ND	ND					
Benzo(b)fluoranthene	10	NA	ND	ND	ND					
Benzo(k)fluoranthene	10	NA	ND	ND	ND					
Chrysene	10	NA	ND	ND	ND					
Dibenz(a,h)anthracene	10	NA	ND	ND	ND					

#### Notes:

 $^{(2)}$  Site-specific groundwater VISLs were calculated using the EPA JE Model Spreadsheets (Version 3.1, February 2004) and conservative modeling inputs representative of a small single-story house with an 8 foot ceiling. Site-specific groundwater VISLs were developed based on a target risk level of  $1 \times 10^{-6}$ , a target hazard quotient of 1 (per target organ), and a default residential exposure scenario, assuming exposure for 24 hours/day, 350 days/year, for 26 years. Modeling was performed for a range of depths to groundwater for application as appropriate in different areas of the Laurel Bay Military Housing Area. The most conservative levels are presented for comparison. Refer to Appendix H of the Uniform Federal Policy Sampling Analysis and Sampling Plan for Vapor Media, Revision 4 (Resolution Consultants, April 2017) for additional information.

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL and/or the Site-Specific Groundwater VISL.

EPA - United States Environmental Protection Agency

JE - Johnson & Ettinger

NA - not applicable

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The groundwater laboratory report is provided in Appendix D.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control


μg/L - micrograms per liter

VISL - Vapor Intrusion Screening Level

<sup>(1)</sup> South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1 (SCDHEC, February 2016).

# Appendix A Multi-Media Selection Process for LBMH



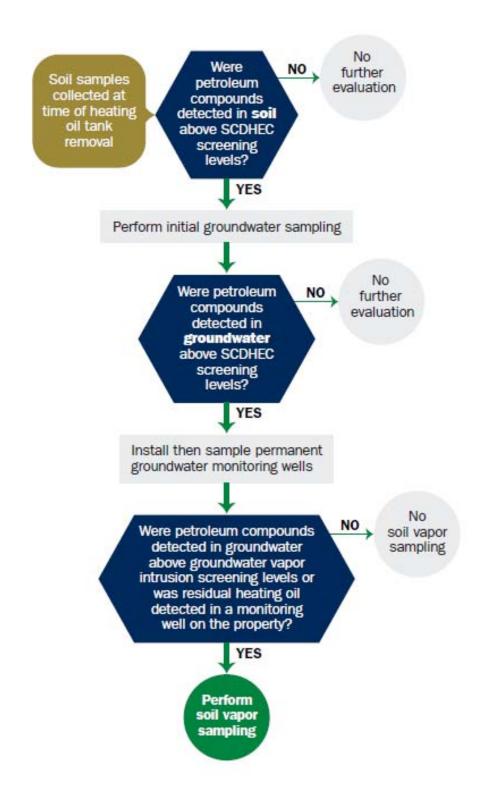

**Appendix A - Multi-Media Selection Process for LBMH** 

# Appendix B Laboratory Analytical Report - Vapor



#### ALS ENVIRONMENTAL

#### RESULTS OF ANALYSIS

Page 1 of 1

Client: AECOM

Client Sample ID: BEALB606SS01GS20160622 ALS Project ID: P1603300 Client Project ID: WE75 -279 Dahlia Drive / 60492362.FI.WI ALS Sample ID: P1603300-001

Test Code: EPA TO-15 Date Collected: 6/22/16
Instrument ID: Tekmar AUTOCAN/Agilent 5975Cinert/6890N/MS16 Date Received: 6/30/16
Analyst: Lusine Hakobyan Date Analyzed: 7/5/16

Sampling Media: 1.0 L Summa Canister Volume(s) Analyzed: 0.40 Liter(s)

Test Notes:

Container ID: 1SC00634

Initial Pressure (psig): -0.99 Final Pressure (psig): 5.08

Canister Dilution Factor: 1.44

CAS#	Compound	Result µg/m³	LOQ μg/m³	LOD µg/m³	MDL μg/m³	Data Qualifier
71-43-2	Benzene	5.6	1.8	1.6	0.58	_
108-88-3	Toluene	2.8	1.8	1.5	0.61	
100-41-4	Ethylbenzene	1.5	1.8	1.5	0.58	${f U}$
179601-23-1	m,p-Xylenes	3.0	3.6	3.0	1.1	$\mathbf{U}$
95-47-6	o-Xylene	1.5	1.8	1.5	0.54	U
91-20-3	Naphthalene	1.4	1.8	1.4	0.65	U

U = Undetected at the limit of detection: The associated data value is the limit of detection, adjusted by any dilution factor used in the analysis. LOQ = Limit of Quantitation - The minimum quantity of a target analyte that can be confidently determined by the referenced method.

# Appendix C Laboratory Analytical Report - Soil



# Volatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606SB0104SO20170928

Laboratory ID: SI30011-007

15

12 U

Matrix: Solid

% Solids: 74.6 10/01/2017 1826

12

5.8

ug/kg

1

Date Received: 09/30/2017

Xylenes (total)

Date Sampled:09/28/2017 1345

Run Prep Method 1 5035	Analytical Method Dilut 8260B 1	,	is Date Analyst 017 0229 ECP	Prep	Date	Batch 53513			
		CAS	Analytical						
Parameter		Number	Method	Result	Q	LOQ	LOD	DL	Units Run
Benzene		71-43-2	8260B	5.8	U	7.3	5.8	2.9	ug/kg 1
Ethylbenzene		100-41-4	8260B	5.8	U	7.3	5.8	2.9	ug/kg 1
Naphthalene		91-20-3	8260B	5.8	U	7.3	5.8	2.9	ug/kg 1
Toluene	•	108-88-3	8260B	5.8	U	7.3	5.8	2.9	ug/kg 1

8260B

1330-20-7

	Surrogate	Q	% Recovery	Limits
Ī	Bromofluorobenzene		98	79-119
	Dibromofluoromethane		97	78-119
	1,2-Dichloroethane-d4		96	71-136
	Toluene-d8		96	85-116

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria

E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40% W = Reported on wet weight basis LOD = Limit of Detection

DL = Detection Limit  $J = Estimated \ result < LOQ \ and \ge DL$ 

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

# Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606SB0104SO20170928

Matrix: Solid

Laboratory ID: SI30011-007

% Solids: 74.6 10/01/2017 1826

Date Received: 09/30/2017

Date Sampled:09/28/2017 1345

Run Prep Method Analytical Method Dilution Analysis Date Analyst Prep Date Batch 1 3550C 8270D (SIM) 10/06/2017 1837 JCG 10/02/2017 2110 53011

Parameter	CAS Number	Analytical Method	Result	Q	LOQ	LOD	DL	Units Run
Benzo(a)anthracene	56-55-3	8270D (SIM)	2.7	U	4.4	2.7	0.79	ug/kg 1
Benzo(b)fluoranthene	205-99-2	8270D (SIM)	1.3	U	4.4	1.3	0.67	ug/kg 1
Benzo(k)fluoranthene	207-08-9	8270D (SIM)	1.3	U	4.4	1.3	0.64	ug/kg 1
Chrysene	218-01-9	8270D (SIM)	1.3	U	4.4	1.3	0.60	ug/kg 1
Dibenzo(a,h)anthracene	53-70-3	8270D (SIM)	2.7	U	4.4	2.7	0.68	ug/kg 1
	Run 1 Accep	tance						

Run 1 Surrogate Q % Recovery Limits Fluoranthene-d10 76 37-135 2-Methylnaphthalene-d10 65 17-119

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria

E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40%

DL = Detection Limit

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

W = Reported on wet weight basis

LOD = Limit of Detection

J = Estimated result < LOQ and  $\geq$  DL

Shealy Environmental Services, Inc.

# Appendix D Laboratory Analytical Reports - Groundwater



# Volatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606TW01WG20170929

Laboratory ID: SI30005-024 Matrix: Aqueous

Date Sampled:09/29/2017 1255 Date Received: 09/30/2017

Run Prep Method Analytical Method Dilution Analysis Date Analyst Prep Date Batch 5030B

8260B	1	10/06/2017 1547	_	р =	53434	

	CAS	Analytical					_
Parameter	Number	Method	Result Q	LOQ	LOD	DL	Units Run
Benzene	71-43-2	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Ethylbenzene	100-41-4	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Naphthalene	91-20-3	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Toluene	108-88-3	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Xylenes (total)	1330-20-7	8260B	0.80 U	1.0	0.80	0.40	ug/L 1

Surrogate	Q	% Recovery	Acceptance Limits
Bromofluorobenzene		93	85-114
Dibromofluoromethane		92	80-119
1,2-Dichloroethane-d4		92	81-118
Toluene-d8		101	89-112

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria

E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40% W = Reported on wet weight basis LOD = Limit of Detection

DL = Detection Limit  $\mbox{ J = Estimated result < LOQ and } \geq \mbox{ DL}$ 

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

# Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606TW01WG20170929

Laboratory ID: SI30005-024 Matrix: Aqueous

Date Sampled:09/29/2017 1255 Date Received: 09/30/2017

Run Prep Method Analytical Method Dilution Analysis Date Analyst Prep Date Batch 3520C 8270D 10/09/2017 1337 CMP2 10/06/2017 0845 53420

	CAS	Analytical					
Parameter	Number	Method	Result Q	LOQ	LOD	DL	Units Run
Benzo(a)anthracene	56-55-3	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Benzo(b)fluoranthene	205-99-2	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Benzo(k)fluoranthene	207-08-9	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Chrysene	218-01-9	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Dibenzo(a,h)anthracene	53-70-3	8270D	0.10 U	0.20	0.10	0.040	ug/L 1

Acceptance Run 1 Surrogate Q % Recovery Limits Nitrobenzene-d5 68 44-120 2-Fluorobiphenyl 51 44-119 Terphenyl-d14 69 50-134

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria W = Reported on wet weight basis E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40% LOD = Limit of Detection

DL = Detection Limit J = Estimated result < LOQ and  $\geq$  DL

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

# Volatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606TW02WG20170929

Laboratory ID: SI30005-023 Matrix: Aqueous

Date Sampled:09/29/2017 1056 Date Received: 09/30/2017

Run Prep Method Analytical Method Dilution Analysis Date Analyst Prep Date Batch 5030B 8260B 10/06/2017 1524 TML 53434

	CAS	Analytical			•	•	
Parameter	Number	Method	Result Q	LOQ	LOD	DL	Units Run
Benzene	71-43-2	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Ethylbenzene	100-41-4	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Naphthalene	91-20-3	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Toluene	108-88-3	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Xylenes (total)	1330-20-7	8260B	0.80 U	1.0	0.80	0.40	ug/L 1

Acceptance Run 1 Surrogate Q % Recovery Limits Bromofluorobenzene 96 85-114 Dibromofluoromethane 92 80-119 1,2-Dichloroethane-d4 94 81-118 Toluene-d8 89-112 103

LOQ = Limit of Quantitation B = Detected in the method blank E = Quantitation of compound exceeded the calibration range DL = Detection Limit Q = Surrogate failure U = Not detected at or above the LOQ N = Recovery is out of criteria P = The RPD between two GC columns exceeds 40%J = Estimated result < LOQ and  $\geq$  DL L = LCS/LCSD failure S = MS/MSD failure H = Out of holding time W = Reported on wet weight basis LOD = Limit of Detection

Shealy Environmental Services, Inc.

# Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606TW02WG20170929

Laboratory ID: SI30005-023

Matrix: Aqueous

Date Sampled:09/29/2017 1056 Date Received: 09/30/2017

3520C

Run Prep Method

Analytical Method Dilution Analysis Date Analyst Prep Date Batch 8270D 10/09/2017 1312 CMP2 10/06/2017 0845 53420

	0.4.6	A I +! I					
Parameter	CAS Number	Analytical Method	Result Q	LOQ	LOD	DL	Units Run
Benzo(a)anthracene	56-55-3	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Benzo(b)fluoranthene	205-99-2	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Benzo(k)fluoranthene	207-08-9	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Chrysene	218-01-9	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Dibenzo(a,h)anthracene	53-70-3	8270D	0.10 U	0.20	0.10	0.040	ug/L 1

Acceptance Run 1 Surrogate Q % Recovery Limits Nitrobenzene-d5 64 44-120 2-Fluorobiphenyl 51 44-119 Terphenyl-d14 68 50-134

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria

E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40%

DL = Detection Limit

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

W = Reported on wet weight basis

LOD = Limit of Detection

J = Estimated result < LOQ and  $\geq$  DL

# Volatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606TW03WG20170929

Laboratory ID: SI30005-022

Matrix: Aqueous

Date Sampled:09/29/2017 1055 Date Received: 09/30/2017

Run Prep Method Analytical Method Dilution Analysis Date Analyst Prep Date Batch 5030B 8260B 10/06/2017 1501 TML 53434

	CAS	Analytical				•	
Parameter	Number	Method	Result Q	LOQ	LOD	DL	Units Run
Benzene	71-43-2	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Ethylbenzene	100-41-4	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Naphthalene	91-20-3	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Toluene	108-88-3	8260B	0.80 U	1.0	0.80	0.40	ug/L 1
Xylenes (total)	1330-20-7	8260B	0.80 U	1.0	0.80	0.40	ug/L 1

Acceptance Run 1 Surrogate Q % Recovery Limits Bromofluorobenzene 94 85-114 Dibromofluoromethane 93 80-119 1,2-Dichloroethane-d4 95 81-118 Toluene-d8 89-112 102

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria W = Reported on wet weight basis E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40%LOD = Limit of Detection

DL = Detection Limit J = Estimated result < LOQ and  $\geq$  DL

Q = Surrogate failure L = LCS/LCSD failure S = MS/MSD failure

Shealy Environmental Services, Inc.

# Semivolatile Organic Compounds by GC/MS

Client: AECOM - Resolution Consultants

Description: BEALB606TW03WG20170929

Laboratory ID: SI30005-022

Matrix: Aqueous

Date Sampled:09/29/2017 1055 Date Received: 09/30/2017

Run Prep Method Analytical Method Dilution Analysis Date Analyst Prep Date Batch 3520C 10/09/2017 1247 CMP2 10/06/2017 0845 53420

Parameter	CAS Number	Analytical Method	Result Q	LOQ	LOD	DL	Units Run
Benzo(a)anthracene	56-55-3	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Benzo(b)fluoranthene	205-99-2	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Benzo(k)fluoranthene	207-08-9	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Chrysene	218-01-9	8270D	0.10 U	0.20	0.10	0.040	ug/L 1
Dibenzo(a,h)anthracene	53-70-3	8270D	0.10 U	0.20	0.10	0.040	ug/L 1

Surrogate	Q	Run 1 % Recovery	Acceptance Limits
Nitrobenzene-d5		69	44-120
2-Fluorobiphenyl		54	44-119
Terphenyl-d14		75	50-134

LOQ = Limit of Quantitation U = Not detected at or above the LOQ H = Out of holding time

B = Detected in the method blank N = Recovery is out of criteria

E = Quantitation of compound exceeded the calibration range P = The RPD between two GC columns exceeds 40%

DL = Detection Limit  $J = Estimated \ result < LOQ \ and \ge DL$ 

Q = Surrogate failure L = LCS/LCSD failure

LOD = Limit of Detection

S = MS/MSD failure

# Appendix E Regulatory Correspondence





June 20, 2017

Commanding Officer Attention: NREAO Mr. William A. Drawdy United State Marine Corps Air Station Post Office Box 55001 Beaufort, SC 29904-5001

RE: Approval Response to Comments and Draft Final Revision 1 Vapor Intrusion Report July 2015, January 2016 and May 2016, Laurel Bay Military Housing Area, Multiple Properties

RE: Approval Response to Comments and Draft Final Revision 1 Letter Report - Petroleum Vapor Intrusion Investigations - June 2016 and January 2017, Multiple Properties, Laurel Bay Military Housing Area

Dear Mr. Drawdy:

The South Carolina Department of Health and Environmental Control (DHEC) received the above referenced response to comments and errata pages on May 24 and June 7, 2017. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

DHEC has reviewed the response to comments and errata pages. Based on this review, DHEC did not generate any additional comments. Please note that the Department's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary. If you have any questions, please contact me at petruslb@dhec.sc.gov or 803-898-0294.

Sincerely,

Laurel Petrus

ZIRES

Department of Defense Corrective Action Section

Cc:

Russell Berry, EQC Region 8

Shawn Dolan, Resolution Consultants Bryan Beck, NAVFAC MIDLANT



March 29, 2018

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United State Marine Corps Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: Approved Response to Comments

Draft Final Revision 1 Soil and Initial Groundwater Investigation Report

September and October 2017 Laurel Bay Military Housing Area

Dear Mr. Drawdy:

The South Carolina Department of Health and Environmental Control (DHEC) received the above referenced Response to Comments and change pages on February 27, 2018. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

DHEC has reviewed the responses and change pages. Based on this review, DHEC has not generated any additional comments. The Department agrees there is no indication of soil or groundwater contamination on 36 of the 37 properties and therefore no further investigation is required at this time on the 36 properties. (See attached list). Please note that DHEC's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, DHEC retains the right to request further investigation if deemed necessary. If you have any questions, please contact me at petruslb@dhec.sc.gov or 803-898-0294.

Sincerely,

**Laurel Petrus** 

Department of Defense Corrective Action Section

Cc:

**EQC Region 8** 

Shawn Dolan, Resolution Consultants Bryan Beck, NAVFAC MIDLANT

**Attachment** 

## March 22, 2018

Draft Final Revision 1 Soil and Initial Groundwater Investigation Report September and October 2017 Laurel Bay Military Housing Area

# Properties recommended for NFA:

117	Banyan Drive	215	Balsam Street	521	Laurel Bay Blvd
138	Laurel Bay Blvd	217	Balsam Street	606	Dahlia Drive
146	Laurel Bay Blvd	266	Beech Street	620	Dahlia Drive
147	Laurel Bay Blvd	272	Birch Drive	680	Camelia Drive
149	Laurel Bay Blvd	307	Ash Street	685	Camelia Drive
157	Cypress Street	327	Ash Street	753	Althea Street
204	Balsam Street	365	Aspen Street	918	Barracuda Drive
205	Balsam Street	374	Aspen Street	932	Albacore Street
206	Balsam Street	393	Acorn Drive	942	Albacore Street
207	Balsam Street	406	Elderberry Drive	1203	Cardinal Lane
209	Balsam Street	438	Elderberry Drive	1229	Dove Lane
213	Balsam Street	461	Elderberry Drive	1313	Albatross Drive