

SUMMARY REPORT
135 BLUEBELL LANE (FORMERLY 716 BLUEBELL LANE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid-Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

JUNE 2021

SUMMARY REPORT
135 BLUEBELL LANE (FORMERLY 716 BLUEBELL LANE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid- Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic

9324 Virginia Avenue
Norfolk, Virginia 23511-3095
Prepared by:



CDM - AECOM Multimedia Joint Venture
10560 Arrowhead Drive, Suite 500
Fairfax, Virginia 22030

Contract Number: N62470-14-D-9016
CTO WE52
JUNE 2021

Table of Contents

1.0	INTRODUCTION.....	1
1.1	BACKGROUND INFORMATION.....	1
1.2	UST REMOVAL AND ASSESSMENT PROCESS.....	2
2.0	SAMPLING ACTIVITIES AND RESULTS.....	3
2.1	UST REMOVAL AND SOIL SAMPLING.....	3
2.2	SOIL ANALYTICAL RESULTS.....	4
3.0	PROPERTY STATUS	4
4.0	REFERENCES.....	4

Table

Table 1 Laboratory Analytical Results - Soil

Appendices

- | | |
|------------|--|
| Appendix A | Multi-Media Selection Process for LBMH |
| Appendix B | UST Assesment Report |
| Appendix C | Regulatory Correspondence |

List of Acronyms

bgs	below ground surface
BTEX	benzene, toluene, ethylbenzene, and xylenes
CTO	Contract Task Order
COPC	constituents of potential concern
IDIQ	Indefinite Delivery, Indefinite Quantity
IGWA	Initial Groundwater Assessment
JV	Joint Venture
LBMH	Laurel Bay Military Housing
MCAS	Marine Corps Air Station
NAVFAC Mid-Lant	Naval Facilities Engineering Command Mid-Atlantic
NFA	No Further Action
PAH	polynuclear aromatic hydrocarbon
QAPP	Quality Assurance Program Plan
RBSL	risk-based screening level
SCDHEC	South Carolina Department of Health and Environmental Control
Site	LBMH area at MCAS Beaufort, South Carolina
UST	underground storage tank
VISL	vapor intrusion screening level

1.0 INTRODUCTION

The CDM - AECOM Multimedia Joint Venture (JV) was contracted by the Naval Facilities Engineering Command, Mid-Atlantic (NAVFAC Mid-Lant) to provide reporting services for the heating oil underground storage tanks (USTs) located in Laurel Bay Military Housing (LBMH) area at the Marine Corps Air Station (MCAS) Beaufort, South Carolina (Site). This work has been awarded under Contract Task Order (CTO) WE52 of the Indefinite Delivery, Indefinite Quantity (IDIQ) Multimedia Environmental Compliance Contract (Contract No. N62470-14-D-9016).

As of January 2014, the LBMH addresses were re-numbered to comply with the E-911 emergency response addressing system; however, in order to remain consistent with historical sampling and reporting for LBMH area, the residences will continue to be referenced with their original address numbers in sample nomenclature and reporting documents.

This report summarizes the results the environmental investigation activities associated with the storage of home heating oil and the potential release of petroleum constituents at the referenced property. Based on the results of the investigation, a No Further Action (NFA) determination has been made by the South Carolina Department of Health and Environmental Control (SCDHEC) for 135 Bluebell Lane (Formerly 716 Bluebell Lane). This NFA determination indicates that there are no unacceptable risks to human health or the environment for the petroleum constituents associated with the home heating oil USTs. The following information is included in this report:

- Background information;
- Sampling activities and results; and
- A determination of the property status.

1.1 Background Information

The LBMH area is located approximately 3.5 miles west of MCAS Beaufort. The area is approximately 970 acres in size and serves as an enlisted and officer family housing area. The area is configured with single family and duplex residential structures, and includes recreation, open space, and community facilities. The community includes approximately 1,300 housing units, including legacy Capehart style homes and newer duplex style homes. The housing area is bordered on the west by salt marshes and the Broad River, and to the north, east and south by uplands. Forested areas lie along the northern and northeastern borders.

Capehart style homes within the LBMH area were formerly heated using heating oil stored in USTs at each residence. There were 1,100 Capehart style housing units in the LBMH area. The newer duplex homes within the LBMH area never utilized heating oil tanks. Heating oil has not been used at Laurel Bay since the mid-1980s. As was the accepted practice at the time, USTs were drained, filled with dirt, capped, and left in place when they were removed from service. Residential USTs are not regulated in the State of South Carolina (i.e., there are no federal or state laws governing installation, management, or removal).

In 2007, MCAS Beaufort began a voluntary program to remove the unregulated, residential USTs and conduct sampling activities to determine if, and to what extent, petroleum constituents may have impacted the surrounding environment. MCAS Beaufort coordinated with SCDHEC to develop removal procedures that were consistent with procedural requirements for regulated USTs. All tank removal activities and follow-on actions are conducted in coordination with SCDHEC. To date, all known USTs have been removed from all residential properties within the LBMH area.

1.2 UST Removal and Assessment Process

During the UST removal process, a soil sample was collected from beneath the UST excavations (approximately 4 to 6 feet [ft] below ground surface [bgs]) and analyzed for a predetermined list of constituents of potential concern (COPCs) associated with the petroleum compounds found in home heating oil. These COPCs, derived from the *Quality Assurance Program Plan (QAPP) for the Underground Storage Tank Management Division, Revision 3.1* (SCDHEC, 2016) and the *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, (SCDHEC, 2018), are as follows:

- benzene, toluene, ethylbenzene, and xylenes (BTEX),
- naphthalene, and
- five select polynuclear aromatic hydrocarbon (PAHs): benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene and dibenz(a,h)anthracene.

Soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form. In accordance with SCDHEC's *QAPP for the UST Management Division* (SCDHEC, 2016), the soil screening levels consists of SCDHEC risk-based screening levels (RBSLs). It should be noted that the RBSLs for select PAHs were revised in Revision 2.0 of the QAPP (SCDHEC, 2013) and were revised again in Revision 3.0 (SCDHEC, 2015). The screening levels

used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC.

The results of the soil sampling at each former UST location were used to determine if a potential for groundwater contamination exists (i.e., soil results greater than RBSLs) and subsequently to select properties for follow-up initial groundwater assessment (IGWA) sampling. The results of the IGWA sampling (if necessary) are used to determine the presence or absence of the aforementioned COPCs in groundwater and identify whether former UST locations will require additional delineation of COPCs in groundwater. In order to delineate the extent of impact to groundwater, permanent wells are installed and a sampling program is established for those former UST locations where IGWA sampling has indicated the presence of COPCs in excess of the SCDHEC RBSLs for groundwater. Groundwater analytical results are also compared to the site specific groundwater vapor intrusion screening levels (VISLs) to evaluate the potential for vapor intrusion and the necessity for an investigation associated with this media. A multi-media investigation selection process tree, applicable to the LBMH UST investigations, is presented as Appendix A.

2.0 SAMPLING ACTIVITIES AND RESULTS

The following section presents the sampling activities and associated results for 135 Bluebell Lane (Formerly 716 Bluebell Lane). Details regarding the soil investigation at this site are provided in the *SCDHEC UST Assessment Report – 716 Bluebell Lane* (MCAS Beaufort, 2010). The UST Assessment Report is provided in Appendix B.

2.1 UST Removal and Soil Sampling

On January 7, 2010, a single 280 gallon heating oil UST was removed from the front landscaped area adjacent to the front of the house at 135 Bluebell Lane (Formerly 716 Bluebell Lane). The former UST location is indicated on Figures 2 and 3 of the UST Assessment Report (Appendix B). The UST was removed and properly disposed of (i.e., shipped offsite for recycling or transported to a landfill). There was no visual evidence (i.e., staining or sheen) of petroleum impact at the time of the UST removal. According to the UST Assessment Report (Appendix B), the depth to the base of the UST was 5'8" bgs and a single soil sample was collected from that depth. The sample was collected from the fill port side of the former UST to represent a worst case scenario.

Following UST removal, a soil sample was collected from the base of the excavation and shipped to an offsite laboratory for analysis of the petroleum COPCs. Sampling was performed in

accordance with applicable South Carolina regulation R.61-92, Part 280 (SCDHEC, 2017) and assessment guidelines.

2.2 Soil Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 1. A copy of the laboratory analytical data report is included in the UST Assessment Report presented in Appendix B. The laboratory analytical data report includes the soil results for the additional PAHs that were analyzed, but do not have associated RBSLs.

The soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form (Appendix B). The results of the soil sampling at the former UST location were used by MCAS Beaufort, in consultation with SCDHEC, to determine a path forward (i.e., additional sampling or NFA) for the property. The soil results collected from 135 Bluebell Lane (Formerly 716 Bluebell Lane) were less than the SCDHEC RBSLs, which indicated the subsurface was not impacted by COPCs associated with the former UST at concentrations that presented a potential risk to human health and the environment.

3.0 PROPERTY STATUS

Based on the analytical results for soil, SCDHEC made the determination that NFA was required for 135 Bluebell Lane (Formerly 716 Bluebell Lane). This NFA determination was obtained in a letter dated November 23, 2010. SCDHEC's NFA letter is provided in Appendix C.

4.0 REFERENCES

Marine Corps Air Station Beaufort, 2010. *South Carolina Department of Health and Environmental Control (SCDHEC) Underground Storage Tank Assessment Report – 716 Bluebell Lane, Laurel Bay Military Housing Area*, April 2010.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2013. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 2.0*, April 2013.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2015. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.0*, May 2015.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2016. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1*, February 2016.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2017. *R.61-92, Part 280, Underground Storage Tank Control Regulations*, March 2017.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2018. *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, March 2018.

Table

Table 1
Laboratory Analytical Results - Soil
135 Bluebell Lane (Formerly 716 Bluebell Lane)
Laurel Bay Military Housing Area
Marine Corps Air Station Beaufort
Beaufort, South Carolina

Constituent	SCDHEC RBSLs ⁽¹⁾	Results Sample Collected 01/07/10
Volatile Organic Compounds Analyzed by EPA Method 8260B (mg/kg)		
Benzene	0.003	ND
Ethylbenzene	1.15	ND
Naphthalene	0.036	ND
Toluene	0.627	ND
Xylenes, Total	13.01	ND
Semivolatile Organic Compounds Analyzed by EPA Method 8270D (mg/kg)		
Benzo(a)anthracene	0.66	ND
Benzo(b)fluoranthene	0.66	ND
Benzo(k)fluoranthene	0.66	ND
Chrysene	0.66	ND
Dibenz(a,h)anthracene	0.66	ND

Notes:

⁽¹⁾ South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 1.0 and 1.1 (SCDHEC, May 2001 and SCDHEC, February 2011) and the Underground Storage Tank Assessment Guidelines (SCDHEC, February 2006).

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL.

EPA - United States Environmental Protection Agency

mg/kg - milligram per kilogram

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The laboratory report is provided in Appendix B.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

Appendix A
Multi-Media Selection Process for LBMH



Appendix A - Multi-Media Selection Process for LBMH

Appendix B
UST Assessment Report

South Carolina Department of Health and Environmental Control (SCDHEC)
Underground Storage Tank (UST) Assessment Report

Date Received	
State Use Only	

Submit Completed Form To:
UST Program
SCDHEC
2600 Bull Street
Columbia, South Carolina 29201
Telephone (803) 896-7957

I. OWNERSHIP OF UST (S)

MCAS Beaufort, Commanding Officer Attn: NREAO (Craig Ehde)
Owner Name (Corporation, Individual, Public Agency, Other)

P.O. Box 55001
Mailing Address

Beaufort, City	South Carolina State	29904-5001 Zip Code
843 Area Code	228-7317 Telephone Number	Craig Ehde Contact Person

II. SITE IDENTIFICATION AND LOCATION

Permit I.D. #
Laurel Bay Military Housing Area, Marine Corps Air Station, Beaufort, SC
Facility Name or Company Site Identifier

716 Bluebell Lane, Laurel Bay Military Housing Area
Street Address or State Road (as applicable)

Beaufort,
City

Beaufort
County

III. INSURANCE INFORMATION

Insurance Statement

The petroleum release reported to DHEC on _____ at Permit ID Number _____ may qualify to receive state monies to pay for appropriate site rehabilitation activities. Before participation is allowed in the State Clean-up fund, written confirmation of the existence or non-existence of an environmental insurance policy is required. **This section must be completed.**

Is there now, or has there ever been an insurance policy or other financial mechanism that covers this UST release? **YES** ____ **NO** ____ (check one)

If you answered **YES** to the above question, please complete the following information:

My policy provider is: _____
The policy deductible is: _____
The policy limit is: _____

If you have this type of insurance, please include a copy of the policy with this report.

IV. REQUEST FOR SUPERB FUNDING

I **DO / DO NOT** wish to participate in the SUPERB Program. (Circle one.)

V. CERTIFICATION (To be signed by the UST owner)

I certify that I have personally examined and am familiar with the information submitted in this and all attached documents; and that based on my inquiry of those individuals responsible for obtaining this information, I believe that the submitted information is true, accurate, and complete.

Name (Type or print.) _____

Signature _____

To be completed by Notary Public:

Sworn before me this _____ day of _____, 20_____

(Name) _____

Notary Public for the state of _____.
Please affix State seal if you are commissioned outside South Carolina

VI. UST INFORMATION

- A. Product...(ex. Gas, Kerosene).....
- B. Capacity..(ex. 1k, 2k).....
- C. Age.....
- D. Construction Material..(ex. Steel, FRP).....
- E. Month/Year of Last Use.....
- F. Depth (ft.) To Base of Tank.....
- G. Spill Prevention Equipment Y/N.....
- H. Overfill Prevention Equipment Y/N.....
- I. Method of Closure Removed/Filled.....
- J. Date Tanks Removed/Filled.....
- K. Visible Corrosion or Pitting Y/N.....
- L. Visible Holes Y/N.....
- M. Method of disposal for any USTs removed from the ground (attach disposal manifests)
UST 716Bluebell was removed from the ground and disposed of at a Subtitle "D" landfill. See Attachment "A".
-
- N. Method of disposal for any liquid petroleum, sludges, or wastewaters removed from the USTs (attach disposal manifests)
UST 716Bluebell had been previously filled with sand by others.
-
- O. If any corrosion, pitting, or holes were observed, describe the location and extent for each UST
Corrosion and pitting were found throughout the tank.

716Bluebell				
Heating oil				
280 gal				
Late 1950s				
Steel				
Mid 1980s				
5' 8"				
No				
No				
Removed				
1/7/10				
Yes				
Yes				

VII. PIPING INFORMATION

- A. Construction Material..(ex. Steel, FRP).....
- B. Distance from UST to Dispenser.....
- C. Number of Dispensers.....
- D. Type of System Pressure or Suction.....
- E. Was Piping Removed from the Ground? Y/N
- F. Visible Corrosion or Pitting Y/N.....
- G. Visible Holes Y/N.....
- H. Age.....
- I. If any corrosion, pitting, or holes were observed, describe the location and extent for each piping run.

716Bluebell				
Steel & Copper				
N/A				
N/A				
Suction				
Yes				
Yes				
No				
Late 1950s				

Corrosion and pitting were found on the surface of the steel vent pipe. Copper supply and return lines were sound.

VIII. BRIEF SITE DESCRIPTION AND HISTORY

The USTs at the residences are constructed of single wall steel and formerly contained fuel oil for heating. These USTs were installed in the late 1950s and last used in the mid 1980s.

IX. SITE CONDITIONS

	Yes	No	Unk
A. Were any petroleum-stained or contaminated soils found in the UST excavation, soil borings, trenches, or monitoring wells? If yes, indicate depth and location on the site map.	<input checked="" type="checkbox"/>		
B. Were any petroleum odors detected in the excavation, soil borings, trenches, or monitoring wells? If yes, indicate location on site map and describe the odor (strong, mild, etc.)	<input checked="" type="checkbox"/>		
C. Was water present in the UST excavation, soil borings, or trenches? If yes, how far below land surface (indicate location and depth)?	<input checked="" type="checkbox"/>		
D. Did contaminated soils remain stockpiled on site after closure? If yes, indicate the stockpile location on the site map. Name of DHEC representative authorizing soil removal:	<input checked="" type="checkbox"/>		
E. Was a petroleum sheen or free product detected on any excavation or boring waters? If yes, indicate location and thickness.	<input checked="" type="checkbox"/>		

X. SAMPLE INFORMATION

A. SCDHEC Lab Certification Number 84009001

B.

Sample #	Location	Sample Type (Soil/Water)	Soil Type (Sand/Clay)	Depth*	Date/Time of Collection	Collected by	OVA #
716 Bluebell	Excav at fill end	Soil	Sandy	5' 8"	1/7/10 1545 hrs	P. Shaw	
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

* = Depth Below the Surrounding Land Surface

XI. SAMPLING METHODOLOGY

Provide a detailed description of the methods used to collect and store the samples. Also include the preservative used for each sample. Please use the space provided below.

Sampling was performed in accordance with SC DHEC R.61-92 Part 280 and SC DHEC Assessment Guidelines. Sample containers were prepared by the testing laboratory. The grab method was utilized to fill the sample containers leaving as little head space as possible and immediately capped. Soil samples were extracted from area below tank. The samples were marked, logged, and immediately placed in a sample cooler packed with ice to maintain an approximate temperature of 4 degrees Centigrade. Tools were thoroughly cleaned and decontaminated with the seven step decon process after each use. The samples remained in custody of SBG-EEG, Inc. until they were transferred to Test America Incorporated for analysis as documented in the Chain of Custody Record.


XII. RECEPTORS

	Yes	No
A. Are there any lakes, ponds, streams, or wetlands located within 1000 feet of the UST system? If yes, indicate type of receptor, distance, and direction on site map.		X
B. Are there any public, private, or irrigation water supply wells within 1000 feet of the UST system? If yes, indicate type of well, distance, and direction on site map.		X
C. Are there any underground structures (e.g., basements) Located within 100 feet of the UST system? If yes, indicate type of structure, distance, and direction on site map.		X
D. Are there any underground utilities (e.g., telephone, electricity, gas, water, sewer, storm drain) located within 100 feet of the UST system that could potentially come in contact with the contamination? *Sewer and water If yes, indicate the type of utility, distance, and direction on the site map.	*X	
E. Has contaminated soil been identified at a depth less than 3 feet below land surface in an area that is not capped by asphalt or concrete? If yes, indicate the area of contaminated soil on the site map.		X

XIII. SITE MAP

You must supply a scaled site map. It should include all buildings, road names, utilities, tank and dispenser island locations, labeled sample locations, extent of excavation, and any other pertinent information.

(Attach Site Map Here)

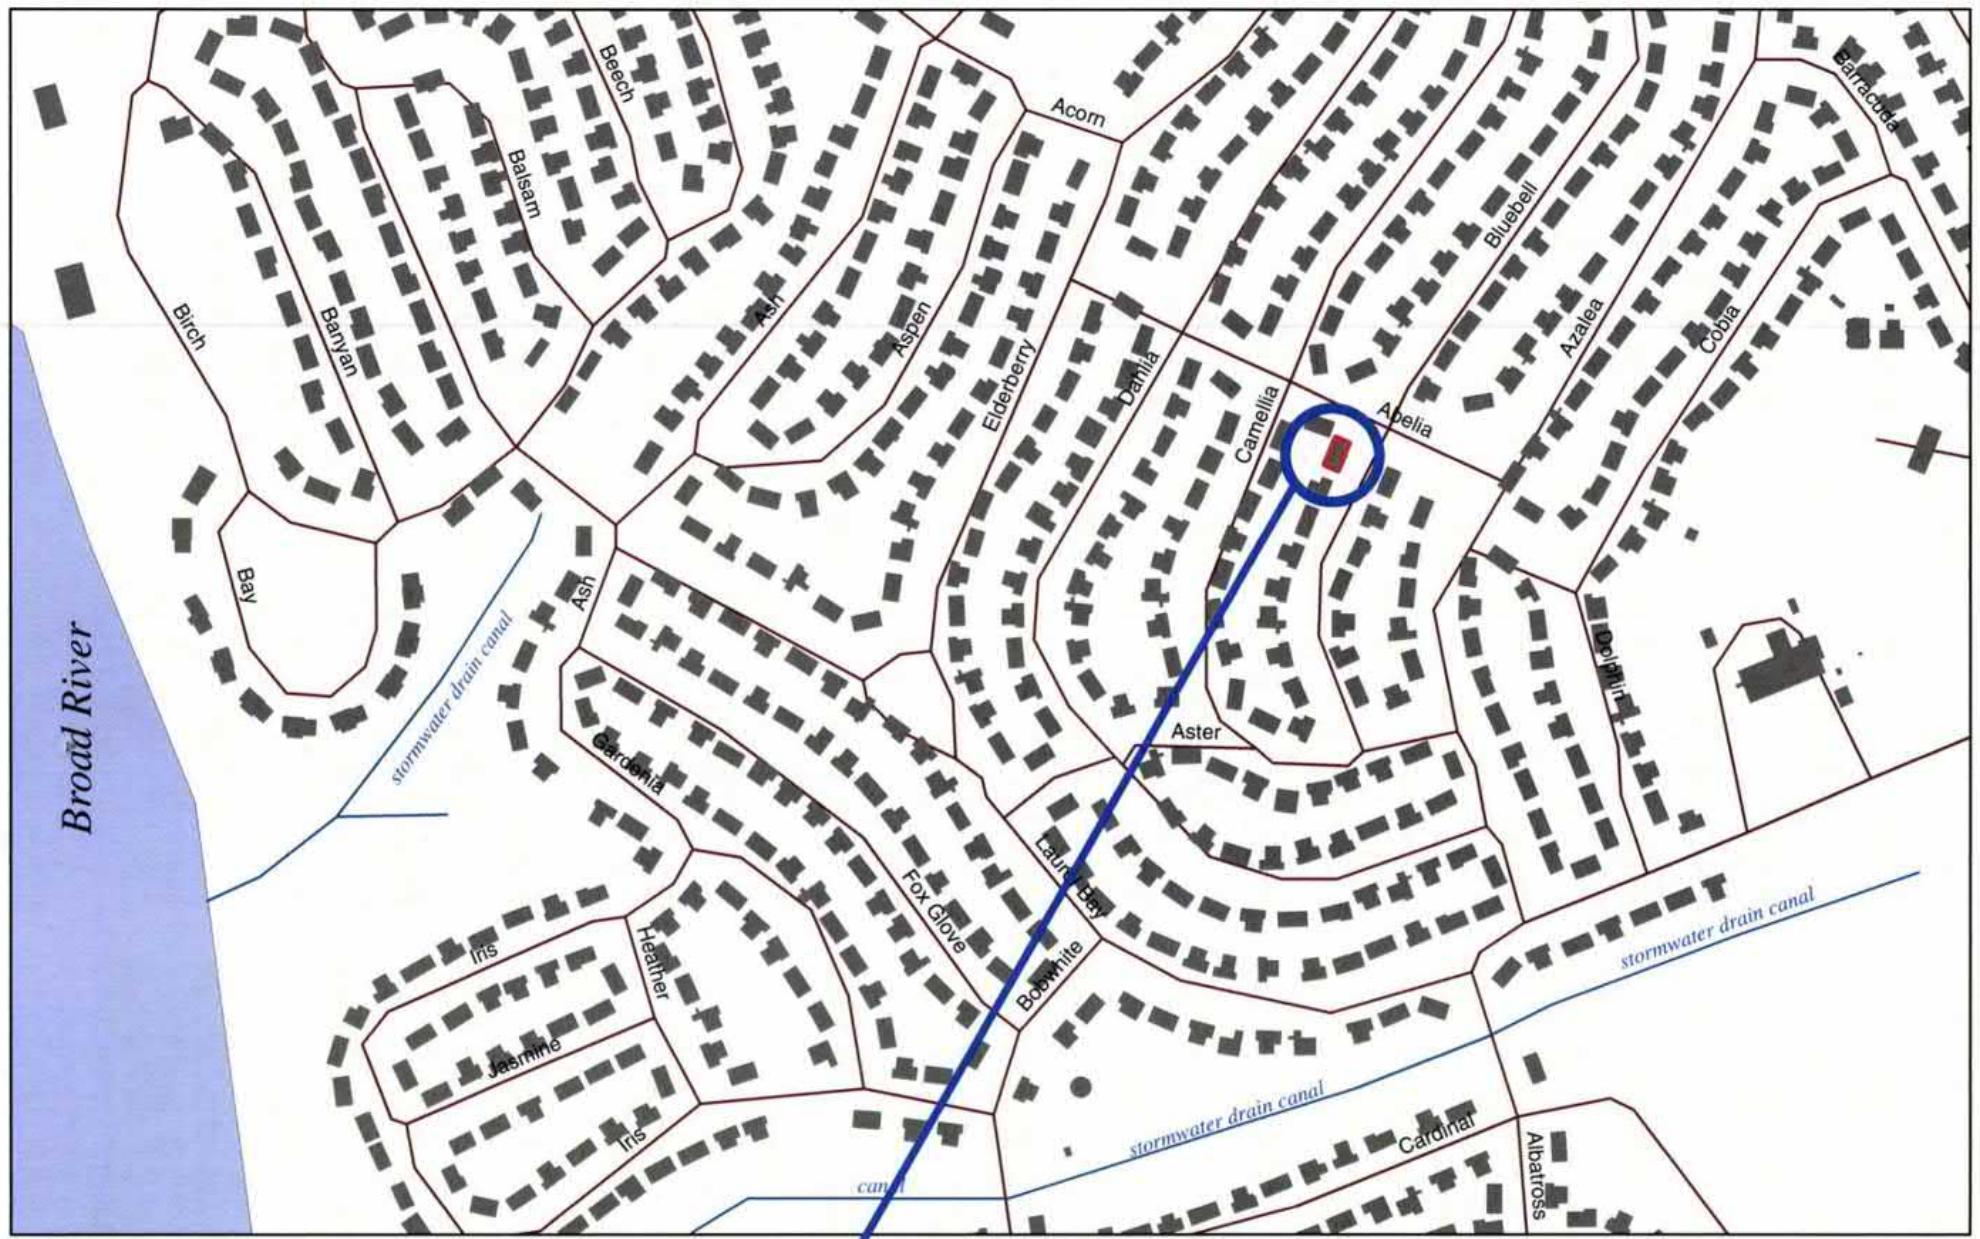

716 BLUEBELL LANE

0 100 200 400 600 800 1,000
HHH Feet

SBG-EEG, Inc.


Small Business Group, Inc.
10179 Hwy 78
Ladson, SC 29456

Ph. (843) 879-0400

Drawn By: L. DiAsio

Dwg Date: MAR 2010

**FIGURE 1: LOCATION MAP
716 BLUEBELL LANE, LAUREL BAY
MCAS BEAUFORT SC**

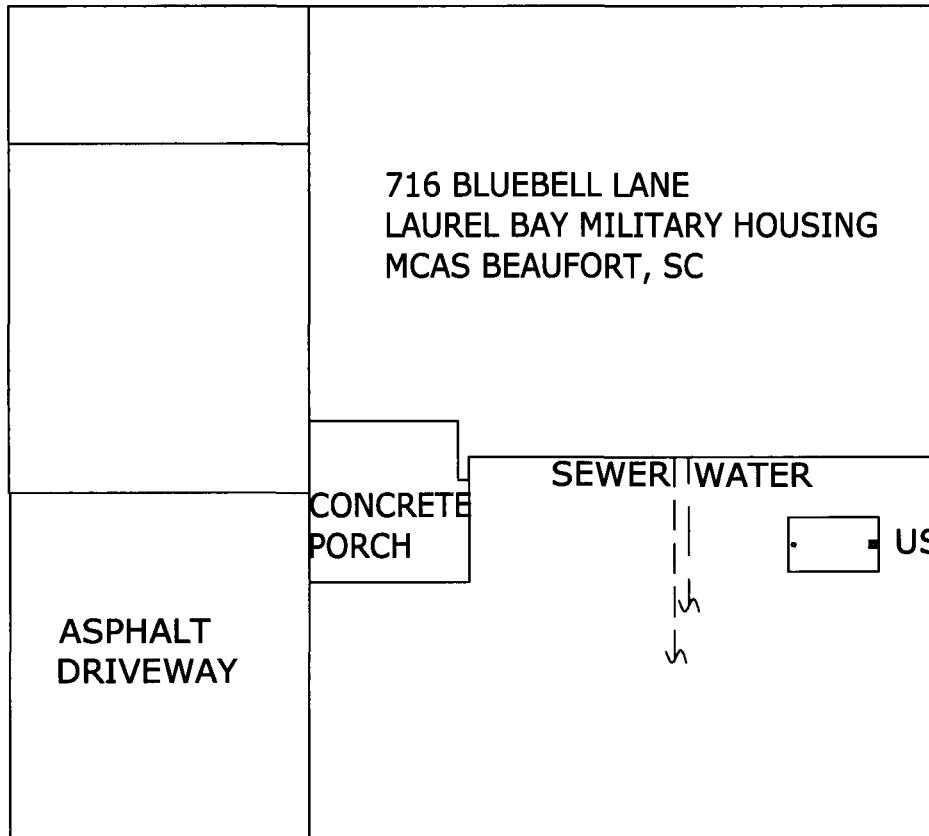

GRAPHIC SCALE

0	5'	10'	20'
---	----	-----	-----

SBG-EEG
10179 HWY 78
LADSON, SC 29456
ph. (843) 879-0400

FIGURE 2 SITE MAP
716 BLUEBELL LANE, LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE MAR 2010

716 BLUEBELL LANE

ASPHALT DRIVEWAY

CONCRETE
PORCH

GRASS


SEWER WATER

EXCAVATION

UST 716BLUEBELL

FILL END

SOIL SAMPLE
716 BLUEBELL



UST 716BLUEBELL WAS
32" BELOW GRADE.

SBG-EEG
10179 HWY 78
LADSON, SC 29456

ph. (843) 879-0400

FIGURE 3 UST SAMPLE LOCATIONS
716 BLUEBELL LANE, LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE MAR 2010



Picture 1: Location of UST 716Bluebell.



Picture 2: UST 716Bluebell site after restoration.

XIV. SUMMARY OF ANALYSIS RESULTS

Enter the soil analytical data for each soil boring for all COC in the table below and on the following page.

CoC	UST	716Bluebell					
Benzene		ND					
Toluene		ND					
Ethylbenzene		ND					
Xylenes		ND					
Naphthalene		ND					
Benzo (a) anthracene		ND					
Benzo (b) fluoranthene		ND					
Benzo (k) fluoranthene		ND					
Chrysene		ND					
Dibenz (a, h) anthracene		ND					
TPH (EPA 3550)							

CoC							
Benzene							
Toluene							
Ethylbenzene							
Xylenes							
Naphthalene							
Benzo (a) anthracene							
Benzo (b) fluoranthene							
Benzo (k) fluoranthene							
Chrysene							
Dibenz (a, h) anthracene							
TPH (EPA 3550)							

SUMMARY OF ANALYSIS RESULTS (cont'd)

Enter the ground water analytical data for each sample for all CoC in the table below. If free product is present, indicate the measured thickness to the nearest 0.01 feet.

CoC	RBSL ($\mu\text{g/l}$)	W-1	W-2	W -3	W -4
Free Product Thickness	None				
Benzene	5				
Toluene	1,000				
Ethylbenzene	700				
Xylenes	10,000				
Total BTEX	N/A				
MTBE	40				
Naphthalene	25				
Benzo (a) anthracene	10				
Benzo (b) flouranthene	10				
Benzo (k) flouranthene	10				
Chrysene	10				
Dibenz (a, h) anthracene	10				
EDB	.05				
1,2-DCA	5				
Lead	Site specific				

XV. ANALYTICAL RESULTS

You must submit the laboratory report and chain-of-custody form for the samples. These samples must be analyzed by a South Carolina certified laboratory.

(Attach Certified Analytical Results and Chain-of-Custody Here)
(Please see Form #4)

January 22, 2010 3:54:03PM

Client: EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn: Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Nbr: [none]
P/O Nbr: 0825
Date Received: 01/08/10

SAMPLE IDENTIFICATION

657 Camellia
658 Camellia
662 Camellia
664 Camellia
668 Camellia
667 Camellia
665 Camellia
663 Camellia
696 Abelia
716 Bluebell

LAB NUMBER

NTA0402-01
NTA0402-02
NTA0402-03
NTA0402-04
NTA0402-05
NTA0402-06
NTA0402-07
NTA0402-08
NTA0402-09
NTA0402-10

COLLECTION DATE AND TIME

01/05/10 09:30
01/05/10 11:15
01/05/10 14:30
01/05/10 16:00
01/06/10 10:30
01/06/10 12:00
01/06/10 15:45
01/07/10 09:45
01/07/10 12:05
01/07/10 15:45

An executed copy of the chain of custody, the project quality control data, and the sample receipt form are also included as an addendum to this report. If you have any questions relating to this analytical report, please contact your Laboratory Project Manager at 1-800-765-0980. Any opinions, if expressed, are outside the scope of the Laboratory's accreditation.

This material is intended only for the use of the individual(s) or entity to whom it is addressed, and may contain information that is privileged and confidential. If you are not the intended recipient, or the employee or agent responsible for delivering this material to the intended recipient, you are hereby notified that any dissemination, distribution, or copying of this material is strictly prohibited. If you have received this material in error, please notify us immediately at 615-726-0177.

South Carolina Certification Number: 84009001

The Chain(s) of Custody, 2 pages, are included and are an integral part of this report.

These results relate only to the items tested. This report shall not be reproduced except in full and with permission of the laboratory.

All solids results are reported in wet weight unless specifically stated.

Estimated uncertainty is available upon request.

This report has been electronically signed.

Report Approved By:



Ken A. Hayes

Senior Project Manager

Client	EEG - Small Business Group, Inc. (2449) 10179 Highway 78 Ladson, SC 29456	Work Order:	NTA0402
Attn	Tom McElwee	Project Name:	Laurel Bay Housing Project
		Project Number:	[none]
		Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-01 (657 Camellia - Soil) Sampled: 01/05/10 09:30									
General Chemistry Parameters									
% Dry Solids	95.7		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00240	1	01/09/10 01:29	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00240	1	01/09/10 01:29	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00599	1	01/09/10 01:29	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00240	1	01/09/10 01:29	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00599	1	01/09/10 01:29	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	105 %					01/09/10 01:29	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	94 %					01/09/10 01:29	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	99 %					01/09/10 01:29	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromoformbenzene (67-147%)</i>	110 %					01/09/10 01:29	SW846 8260B	SMS	10A0823

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-01 (657 Camellia - Soil) - cont. Sampled: 01/05/10 09:30										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0228	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0228	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0156	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0135	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0156	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0176	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0145	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0197	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0156	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0145	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0145	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0135	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0125	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0208	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0135	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Pyrene	0.0457	J	mg/kg dry	0.0125	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0176	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0187	0.0695	1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	69 %					1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	59 %					1	01/16/10 14:37	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	52 %					1	01/16/10 14:37	SW846 8270D	JLS	10A0839

Client	EEG - Small Business Group, Inc. (2449) 10179 Highway 78 Ladson, SC 29456	Work Order:	NTA0402
Attn	Tom McElwee	Project Name:	Laurel Bay Housing Project
		Project Number:	[none]
		Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-02 (658 Camellia - Soil) Sampled: 01/05/10 11:15									
General Chemistry Parameters									
% Dry Solids	95.4		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00235	1	01/09/10 01:59	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00235	1	01/09/10 01:59	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00588	1	01/09/10 01:59	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00235	1	01/09/10 01:59	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00588	1	01/09/10 01:59	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	<i>103 %</i>					<i>01/09/10 01:59</i>	<i>SW846 8260B</i>	<i>SMS</i>	<i>10A0823</i>
<i>Surr: Dibromoformmethane (75-125%)</i>	<i>95 %</i>					<i>01/09/10 01:59</i>	<i>SW846 8260B</i>	<i>SMS</i>	<i>10A0823</i>
<i>Surr: Toluene-d8 (76-129%)</i>	<i>101 %</i>					<i>01/09/10 01:59</i>	<i>SW846 8260B</i>	<i>SMS</i>	<i>10A0823</i>
<i>Surr: 4-Bromoformbenzene (67-147%)</i>	<i>118 %</i>					<i>01/09/10 01:59</i>	<i>SW846 8260B</i>	<i>SMS</i>	<i>10A0823</i>

Client	EEG - Small Business Group, Inc. (2449)	Work Order:	NTA0402
	10179 Highway 78	Project Name:	Laurel Bay Housing Project
	Ladson, SC 29456	Project Number:	[none]
Attn	Tom McElwee	Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-02 (658 Camellia - Soil) - cont. Sampled: 01/05/10 11:15										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0228	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0228	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0156	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0135	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0156	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0176	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0145	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0197	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0156	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0145	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0145	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0135	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0124	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0207	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0135	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Pyrene	ND		mg/kg dry	0.0124	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0176	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0187	0.0695	1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	64 %					1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	60 %					1	01/16/10 15:00	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	53 %					1	01/16/10 15:00	SW846 8270D	JLS	10A0839

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-03 (662 Camellia - Soil) Sampled: 01/05/10 14:30									
General Chemistry Parameters									
% Dry Solids	95.2		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00240	1	01/09/10 02:29	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00240	1	01/09/10 02:29	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00600	1	01/09/10 02:29	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00240	1	01/09/10 02:29	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00600	1	01/09/10 02:29	SW846 8260B	SMS	10A0823
<i>Surr. 1,2-Dichloroethane-d4 (67-138%)</i>	103 %					01/09/10 02:29	SW846 8260B	SMS	10A0823
<i>Surr. Dibromoformmethane (75-125%)</i>	93 %					01/09/10 02:29	SW846 8260B	SMS	10A0823
<i>Surr. Toluene-d8 (76-129%)</i>	102 %					01/09/10 02:29	SW846 8260B	SMS	10A0823
<i>Surr. 4-Bromofluorobenzene (67-147%)</i>	119 %					01/09/10 02:29	SW846 8260B	SMS	10A0823

Client	EEG - Small Business Group, Inc. (2449) 10179 Highway 78 Ladson, SC 29456	Work Order:	NTA0402
		Project Name:	Laurel Bay Housing Project
Attn	Tom McElwee	Project Number:	[none]
		Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-03 (662 Camellia - Soil) - cont. Sampled: 01/05/10 14:30										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0226	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0226	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0154	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0134	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0154	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	0.126		mg/kg dry	0.0175	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0144	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	0.0480	J	mg/kg dry	0.0195	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0154	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0144	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0144	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0134	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	0.0398	J	mg/kg dry	0.0123	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0206	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0134	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Pyrene	0.117		mg/kg dry	0.0123	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0175	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0185	0.0689	1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	64 %					1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	60 %					1	01/16/10 15:23	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	51 %					1	01/16/10 15:23	SW846 8270D	JLS	10A0839

Client	EEG - Small Business Group, Inc. (2449)	Work Order:	NTA0402
	10179 Highway 78	Project Name:	Laurel Bay Housing Project
	Ladson, SC 29456	Project Number:	[none]
Attn	Tom McElwee	Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-04 (664 Camellia - Soil) Sampled: 01/05/10 16:00									
General Chemistry Parameters									
% Dry Solids	93.4		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00219	1	01/09/10 02:59	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00219	1	01/09/10 02:59	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00547	1	01/09/10 02:59	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00219	1	01/09/10 02:59	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00547	1	01/09/10 02:59	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	105 %					01/09/10 02:59	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	95 %					01/09/10 02:59	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	96 %					01/09/10 02:59	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromofluorobenzene (67-147%)</i>	111 %					01/09/10 02:59	SW846 8260B	SMS	10A0823

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-04 (664 Camellia - Soil) - cont. Sampled: 01/05/10 16:00										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0235	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0235	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0160	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0139	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0160	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0182	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0149	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0203	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0160	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0149	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0149	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0139	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0128	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0214	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0139	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Pyrene	ND		mg/kg dry	0.0128	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0182	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0192	0.0715	1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	76 %					1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	62 %					1	01/16/10 15:46	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	57 %					1	01/16/10 15:46	SW846 8270D	JLS	10A0839

Client	EEG - Small Business Group, Inc. (2449) 10179 Highway 78 Ladson, SC 29456	Work Order:	NTA0402
Attn	Tom McElwee	Project Name:	Laurel Bay Housing Project
		Project Number:	[none]
		Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-05 (668 Camellia - Soil) Sampled: 01/06/10 10:30									
General Chemistry Parameters									
% Dry Solids	94.3		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00237	1	01/09/10 03:29	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00237	1	01/09/10 03:29	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00592	1	01/09/10 03:29	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00237	1	01/09/10 03:29	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00592	1	01/09/10 03:29	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	114 %					01/09/10 03:29	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	100 %					01/09/10 03:29	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	99 %					01/09/10 03:29	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromofluorobenzene (67-147%)</i>	112 %					01/09/10 03:29	SW846 8260B	SMS	10A0823

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-05 (668 Camellia - Soil) - cont. Sampled: 01/06/10 10:30										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0233	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0233	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0159	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0137	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0159	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0180	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0148	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0201	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0159	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0148	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0148	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0137	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0127	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0211	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0137	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Pyrene	ND		mg/kg dry	0.0127	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0180	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0190	0.0708	1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	68 %					1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	54 %					1	01/16/10 16:09	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	51 %					1	01/16/10 16:09	SW846 8270D	JLS	10A0839

Client	EEG - Small Business Group, Inc. (2449) 10179 Highway 78 Ladson, SC 29456	Work Order:	NTA0402
Attn	Tom McElwee	Project Name:	Laurel Bay Housing Project
		Project Number:	[none]
		Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-06 (667 Camellia - Soil) Sampled: 01/06/10 12:00									
General Chemistry Parameters									
% Dry Solids	94.8		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00227	1	01/09/10 03:59	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00227	1	01/09/10 03:59	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00568	1	01/09/10 03:59	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00227	1	01/09/10 03:59	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00568	1	01/09/10 03:59	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	106 %					01/09/10 03:59	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	95 %					01/09/10 03:59	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	99 %					01/09/10 03:59	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromofluorobenzene (67-147%)</i>	111 %					01/09/10 03:59	SW846 8260B	SMS	10A0823

Client	EEG - Small Business Group, Inc. (2449)	Work Order:	NTA0402
	10179 Highway 78	Project Name:	Laurel Bay Housing Project
	Ladson, SC 29456	Project Number:	[none]
Attn	Tom McElwee	Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-06 (667 Camellia - Soil) - cont. Sampled: 01/06/10 12:00										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0229	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0229	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0156	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0136	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0156	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0177	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0146	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0198	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0156	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0146	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0146	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0136	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0125	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0209	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0136	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Pyrene	ND		mg/kg dry	0.0125	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0177	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0188	0.0699	1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	65 %					1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	44 %					1	01/16/10 16:31	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	41 %					1	01/16/10 16:31	SW846 8270D	JLS	10A0839

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-07 (665 Camellia - Soil) Sampled: 01/06/10 15:45									
General Chemistry Parameters									
% Dry Solids	92.9		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00245	1	01/09/10 04:29	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00245	1	01/09/10 04:29	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00613	1	01/09/10 04:29	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00245	1	01/09/10 04:29	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00613	1	01/09/10 04:29	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	117 %					01/09/10 04:29	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	100 %					01/09/10 04:29	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	101 %					01/09/10 04:29	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromofluorobenzene (67-147%)</i>	116 %					01/09/10 04:29	SW846 8260B	SMS	10A0823

Client	EEG - Small Business Group, Inc. (2449)	Work Order:	NTA0402
	10179 Highway 78	Project Name:	Laurel Bay Housing Project
	Ladson, SC 29456	Project Number:	[none]
Attn	Tom McElwee	Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-07 (665 Camellia - Soil) - cont. Sampled: 01/06/10 15:45										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0232	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0232	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Anthracene	0.0415	J	mg/kg dry	0.0158	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	0.888		mg/kg dry	0.0137	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	0.265		mg/kg dry	0.0158	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	0.870		mg/kg dry	0.0179	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	0.163		mg/kg dry	0.0148	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	0.315		mg/kg dry	0.0200	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Chrysene	0.817		mg/kg dry	0.0158	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	0.0657	J	mg/kg dry	0.0148	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Fluoranthene	2.19		mg/kg dry	0.0148	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0137	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	0.174		mg/kg dry	0.0127	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0211	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Phenanthrene	0.320		mg/kg dry	0.0137	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Pyrene	2.03		mg/kg dry	0.0127	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0179	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0190	0.0707	1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	69 %					1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	60 %					1	01/16/10 16:54	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	53 %					1	01/16/10 16:54	SW846 8270D	JLS	10A0839

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-08 (663 Camellia - Soil) Sampled: 01/07/10 09:45									
General Chemistry Parameters									
% Dry Solids	91.9		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00221	1	01/09/10 04:59	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00221	1	01/09/10 04:59	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00552	1	01/09/10 04:59	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00221	1	01/09/10 04:59	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00552	1	01/09/10 04:59	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	112 %					01/09/10 04:59	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	97 %					01/09/10 04:59	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	100 %					01/09/10 04:59	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromofluorobenzene (67-147%)</i>	120 %					01/09/10 04:59	SW846 8260B	SMS	10A0823

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-08 (663 Camellia - Soil) - cont. Sampled: 01/07/10 09:45										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0238	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0238	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0162	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0140	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0162	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0184	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0151	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0205	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0162	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0151	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0151	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0140	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0130	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0216	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0140	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Pyrene	ND		mg/kg dry	0.0130	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0184	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0195	0.0724	1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	71 %					1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	53 %					1	01/16/10 17:17	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	50 %					1	01/16/10 17:17	SW846 8270D	JLS	10A0839

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-09 (696 Abelia - Soil) Sampled: 01/07/10 12:05									
General Chemistry Parameters									
% Dry Solids	92.3		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00235	1	01/09/10 05:30	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00235	1	01/09/10 05:30	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00586	1	01/09/10 05:30	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00235	1	01/09/10 05:30	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00586	1	01/09/10 05:30	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	112 %					01/09/10 05:30	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	100 %					01/09/10 05:30	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	104 %					01/09/10 05:30	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromoformbenzene (67-147%)</i>	123 %					01/09/10 05:30	SW846 8260B	SMS	10A0823

Client EEG - Small Business Group, Inc. (2449)
 10179 Highway 78
 Ladson, SC 29456
 Attn Tom McElwee

Work Order: NTA0402
 Project Name: Laurel Bay Housing Project
 Project Number: [none]
 Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-09 (696 Abelia - Soil) - cont. Sampled: 01/07/10 12:05										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0236	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0236	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0161	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0139	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0161	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0182	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0150	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0204	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0161	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0150	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0150	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0139	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0129	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0214	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0139	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Pyrene	ND		mg/kg dry	0.0129	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0182	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0193	0.0718	1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	63 %					1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	48 %					1	01/16/10 17:40	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	42 %					1	01/16/10 17:40	SW846 8270D	JLS	10A0839

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-10 (716 Bluebell - Soil) Sampled: 01/07/10 15:45									
General Chemistry Parameters									
% Dry Solids	94.1		%	0.500	1	01/20/10 08:35	SW-846	HLB	10A2093
Selected Volatile Organic Compounds by EPA Method 8260B									
Benzene	ND		mg/kg dry	0.00226	1	01/09/10 06:00	SW846 8260B	SMS	10A0823
Ethylbenzene	ND		mg/kg dry	0.00226	1	01/09/10 06:00	SW846 8260B	SMS	10A0823
Naphthalene	ND		mg/kg dry	0.00564	1	01/09/10 06:00	SW846 8260B	SMS	10A0823
Toluene	ND		mg/kg dry	0.00226	1	01/09/10 06:00	SW846 8260B	SMS	10A0823
Xylenes, total	ND		mg/kg dry	0.00564	1	01/09/10 06:00	SW846 8260B	SMS	10A0823
<i>Surr: 1,2-Dichloroethane-d4 (67-138%)</i>	106 %					01/09/10 06:00	SW846 8260B	SMS	10A0823
<i>Surr: Dibromoformmethane (75-125%)</i>	96 %					01/09/10 06:00	SW846 8260B	SMS	10A0823
<i>Surr: Toluene-d8 (76-129%)</i>	100 %					01/09/10 06:00	SW846 8260B	SMS	10A0823
<i>Surr: 4-Bromofluorobenzene (67-147%)</i>	111 %					01/09/10 06:00	SW846 8260B	SMS	10A0823

Client	EEG - Small Business Group, Inc. (2449)	Work Order:	NTA0402
	10179 Highway 78	Project Name:	Laurel Bay Housing Project
	Ladson, SC 29456	Project Number:	[none]
Attn	Tom McElwee	Received:	01/08/10 08:00

ANALYTICAL REPORT

Analyte	Result	Flag	Units	MDL	MRL	Dilution Factor	Analysis Date/Time	Method	Analyst	Batch
Sample ID: NTA0402-10 (716 Bluebell - Soil) - cont. Sampled: 01/07/10 15:45										
Polyaromatic Hydrocarbons by EPA 8270D										
Acenaphthene	ND		mg/kg dry	0.0232	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Acenaphthylene	ND		mg/kg dry	0.0232	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Anthracene	ND		mg/kg dry	0.0158	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Benzo (a) anthracene	ND		mg/kg dry	0.0137	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Benzo (a) pyrene	ND		mg/kg dry	0.0158	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Benzo (b) fluoranthene	ND		mg/kg dry	0.0179	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Benzo (g,h,i) perylene	ND		mg/kg dry	0.0148	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Benzo (k) fluoranthene	ND		mg/kg dry	0.0200	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Chrysene	ND		mg/kg dry	0.0158	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Dibenz (a,h) anthracene	ND		mg/kg dry	0.0148	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Fluoranthene	ND		mg/kg dry	0.0148	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Fluorene	ND		mg/kg dry	0.0137	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Indeno (1,2,3-cd) pyrene	ND		mg/kg dry	0.0127	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Naphthalene	ND		mg/kg dry	0.0211	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Phenanthrene	ND		mg/kg dry	0.0137	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Pyrene	ND		mg/kg dry	0.0127	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
1-Methylnaphthalene	ND		mg/kg dry	0.0179	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
2-Methylnaphthalene	ND		mg/kg dry	0.0190	0.0707	1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Surr: Terphenyl-d14 (18-120%)	74 %					1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Surr: 2-Fluorobiphenyl (14-120%)	58 %					1	01/16/10 18:03	SW846 8270D	JLS	10A0839
Surr: Nitrobenzene-d5 (17-120%)	58 %					1	01/16/10 18:03	SW846 8270D	JLS	10A0839

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

SAMPLE EXTRACTION DATA

Parameter	Batch	Lab Number	Wt/Vol Extracted	Extracted Vol	Date	Analyst	Extraction Method
Polyaromatic Hydrocarbons by EPA 8270D							
SW846 8270D	10A0839	NTA0402-01	30.21	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-02	30.32	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-03	30.64	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-04	30.08	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-05	30.09	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-06	30.35	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-07	30.62	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-08	30.21	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-09	30.31	1.00	01/13/10 08:15	SJM	EPA 3550C
SW846 8270D	10A0839	NTA0402-10	30.22	1.00	01/13/10 08:15	SJM	EPA 3550C
Selected Volatile Organic Compounds by EPA Method 8260B							
SW846 8260B	10A0823	NTA0402-01	4.36	5.00	01/05/10 09:30	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-02	4.46	5.00	01/05/10 11:15	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-03	4.38	5.00	01/05/10 14:30	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-04	4.89	5.00	01/05/10 16:00	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-05	4.48	5.00	01/06/10 10:30	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-06	4.64	5.00	01/06/10 12:00	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-07	4.39	5.00	01/06/10 15:45	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-08	4.93	5.00	01/07/10 09:45	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-09	4.62	5.00	01/07/10 12:05	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-10	4.71	5.00	01/07/10 15:45	JRL	EPA 5035
SW846 8260B	10A0823	NTA0402-10RE1	4.14	5.00	01/07/10 15:45	JRL	EPA 5035

Client	EEG - Small Business Group, Inc. (2449)	Work Order:	NTA0402
	10179 Highway 78	Project Name:	Laurel Bay Housing Project
	Ladson, SC 29456	Project Number:	[none]
Attn	Tom McElwee	Received:	01/08/10 08:00

PROJECT QUALITY CONTROL DATA Blank

Analyte	Blank Value	Q	Units	Q.C. Batch	Lab Number	Analyzed Date/Time
---------	-------------	---	-------	------------	------------	--------------------

Selected Volatile Organic Compounds by EPA Method 8260B

10A0823-BLK1

Benzene	<0.000670		mg/kg	10A0823	10A0823-BLK1	01/09/10 00:58
Ethylbenzene	<0.000670		mg/kg	10A0823	10A0823-BLK1	01/09/10 00:58
Naphthalene	<0.00170		mg/kg	10A0823	10A0823-BLK1	01/09/10 00:58
Toluene	<0.000400		mg/kg	10A0823	10A0823-BLK1	01/09/10 00:58
Xylenes, total	<0.00130		mg/kg	10A0823	10A0823-BLK1	01/09/10 00:58
<i>Surrogate: 1,2-Dichloroethane-d4</i>	103%			10A0823	10A0823-BLK1	01/09/10 00:58
<i>Surrogate: Dibromoformmethane</i>	94%			10A0823	10A0823-BLK1	01/09/10 00:58
<i>Surrogate: Toluene-d8</i>	99%			10A0823	10A0823-BLK1	01/09/10 00:58
<i>Surrogate: 4-Bromofluorobenzene</i>	108%			10A0823	10A0823-BLK1	01/09/10 00:58

Polyaromatic Hydrocarbons by EPA 8270D

10A0839-BLK1

Acenaphthene	<0.0220		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Acenaphthylene	<0.0220		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Anthracene	<0.0150		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Benzo (a) anthracene	<0.0130		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Benzo (a) pyrene	<0.0150		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Benzo (b) fluoranthene	<0.0170		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Benzo (g,h,i) perylene	<0.0140		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Benzo (k) fluoranthene	<0.0190		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Chrysene	<0.0150		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Dibenz (a,h) anthracene	<0.0140		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Fluoranthene	<0.0140		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Fluorene	<0.0130		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Indeno (1,2,3-cd) pyrene	<0.0120		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Naphthalene	<0.0200		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Phenanthrene	<0.0130		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
Pyrene	<0.0120		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
1-Methylnaphthalene	<0.0170		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
2-Methylnaphthalene	<0.0180		mg/kg	10A0839	10A0839-BLK1	01/16/10 12:43
<i>Surrogate: Terphenyl-d14</i>	79%			10A0839	10A0839-BLK1	01/16/10 12:43
<i>Surrogate: 2-Fluorobiphenyl</i>	57%			10A0839	10A0839-BLK1	01/16/10 12:43
<i>Surrogate: Nitrobenzene-d5</i>	49%			10A0839	10A0839-BLK1	01/16/10 12:43

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

PROJECT QUALITY CONTROL DATA
Duplicate

Analyte	Orig. Val.	Duplicate	Q	Units	RPD	Limit	Batch	Sample Duplicated	% Rec.	Analyzed Date/Time
General Chemistry Parameters										
10A2093-DUP1										
% Dry Solids	95.7	95.1		%	0.6	20	10A2093	NTA0402-01		01/20/10 08:35

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

PROJECT QUALITY CONTROL DATA
LCS

Analyte	Known Val.	Analyzed Val	Q	Units	% Rec.	Target Range	Batch	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B								
10A0823-BS1								
Benzene	50.0	51.9		ug/kg	104%	78 - 126	10A0823	01/08/10 22:58
Ethylbenzene	50.0	49.6		ug/kg	99%	79 - 130	10A0823	01/08/10 22:58
Naphthalene	50.0	51.8		ug/kg	104%	72 - 150	10A0823	01/08/10 22:58
Toluene	50.0	51.6		ug/kg	103%	76 - 126	10A0823	01/08/10 22:58
Xylenes, total	150	143		ug/kg	95%	80 - 130	10A0823	01/08/10 22:58
<i>Surrogate: 1,2-Dichloroethane-d4</i>	50.0	50.1			100%	67 - 138	10A0823	01/08/10 22:58
<i>Surrogate: Dibromofluoromethane</i>	50.0	47.5			95%	75 - 125	10A0823	01/08/10 22:58
<i>Surrogate: Toluene-d8</i>	50.0	51.2			102%	76 - 129	10A0823	01/08/10 22:58
<i>Surrogate: 4-Bromofluorobenzene</i>	50.0	52.5			105%	67 - 147	10A0823	01/08/10 22:58
Polyaromatic Hydrocarbons by EPA 8270D								
10A0839-BS1								
Acenaphthene	1.67	1.63		mg/kg	98%	49 - 120	10A0839	01/16/10 13:06
Acenaphthylene	1.67	1.65		mg/kg	99%	52 - 120	10A0839	01/16/10 13:06
Anthracene	1.67	1.92		mg/kg	115%	58 - 120	10A0839	01/16/10 13:06
Benzo (a) anthracene	1.67	1.74		mg/kg	104%	57 - 120	10A0839	01/16/10 13:06
Benzo (a) pyrene	1.67	1.82		mg/kg	109%	55 - 120	10A0839	01/16/10 13:06
Benzo (b) fluoranthene	1.67	1.85		mg/kg	111%	51 - 123	10A0839	01/16/10 13:06
Benzo (g,h,i) perylene	1.67	1.84		mg/kg	110%	49 - 121	10A0839	01/16/10 13:06
Benzo (k) fluoranthene	1.67	1.70		mg/kg	102%	42 - 129	10A0839	01/16/10 13:06
Chrysene	1.67	1.72		mg/kg	103%	55 - 120	10A0839	01/16/10 13:06
Dibenz (a,h) anthracene	1.67	1.83		mg/kg	110%	50 - 123	10A0839	01/16/10 13:06
Fluoranthene	1.67	1.75		mg/kg	105%	58 - 120	10A0839	01/16/10 13:06
Fluorene	1.67	1.65		mg/kg	99%	54 - 120	10A0839	01/16/10 13:06
Indeno (1,2,3-cd) pyrene	1.67	1.87		mg/kg	112%	50 - 122	10A0839	01/16/10 13:06
Naphthalene	1.67	1.30		mg/kg	78%	28 - 120	10A0839	01/16/10 13:06
Phenanthrene	1.67	1.70		mg/kg	102%	56 - 120	10A0839	01/16/10 13:06
Pyrene	1.67	1.79		mg/kg	108%	56 - 120	10A0839	01/16/10 13:06
1-Methylnaphthalene	1.67	1.33		mg/kg	80%	36 - 120	10A0839	01/16/10 13:06
2-Methylnaphthalene	1.67	1.42		mg/kg	85%	36 - 120	10A0839	01/16/10 13:06
<i>Surrogate: Terphenyl-d14</i>	1.67	1.62			97%	18 - 120	10A0839	01/16/10 13:06
<i>Surrogate: 2-Fluorobiphenyl</i>	1.67	1.38			83%	14 - 120	10A0839	01/16/10 13:06
<i>Surrogate: Nitrobenzene-d5</i>	1.67	1.19			72%	17 - 120	10A0839	01/16/10 13:06

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

PROJECT QUALITY CONTROL DATA
LCS Dup

Analyte	Orig. Val.	Duplicate	Q	Units	Spike Conc	% Rec.	Target Range	RPD	Limit	Batch	Sample Duplicated	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B												
10A0823-BSD1												
Benzene	52.4			ug/kg	50.0	105%	78 - 126	1	50	10A0823		01/08/10 23:28
Ethylbenzene	52.1			ug/kg	50.0	104%	79 - 130	5	50	10A0823		01/08/10 23:28
Naphthalene	52.9			ug/kg	50.0	106%	72 - 150	2	50	10A0823		01/08/10 23:28
Toluene	55.0			ug/kg	50.0	110%	76 - 126	6	50	10A0823		01/08/10 23:28
Xylenes, total	151			ug/kg	150	101%	80 - 130	6	50	10A0823		01/08/10 23:28
Surrogate: 1,2-Dichloroethane-d4	48.1			ug/kg	50.0	96%	67 - 138			10A0823		01/08/10 23:28
Surrogate: Dibromoformmethane	46.2			ug/kg	50.0	92%	75 - 125			10A0823		01/08/10 23:28
Surrogate: Toluene-d8	51.6			ug/kg	50.0	103%	76 - 129			10A0823		01/08/10 23:28
Surrogate: 4-Bromofluorobenzene	54.1			ug/kg	50.0	108%	67 - 147			10A0823		01/08/10 23:28

Client	EEG - Small Business Group, Inc. (2449) 10179 Highway 78 Ladson, SC 29456	Work Order:	NTA0402
		Project Name:	Laurel Bay Housing Project
Attn	Tom McElwee	Project Number:	[none]
		Received:	01/08/10 08:00

PROJECT QUALITY CONTROL DATA
Matrix Spike

Analyte	Orig. Val.	MS Val	Q	Units	Spike Conc	% Rec.	Target Range	Batch	Sample Spiked	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B										
10A0823-MS1										
Benzene										
Benzene	ND	3.17		mg/kg	3.02	105%	42 - 141	10A0823	NTA0402-10RE 1	01/09/10 07:00
Ethylbenzene	ND	3.01		mg/kg	3.02	100%	21 - 165	10A0823	NTA0402-10RE 1	01/09/10 07:00
Naphthalene	ND	3.36		mg/kg	3.02	111%	10 - 160	10A0823	NTA0402-10RE 1	01/09/10 07:00
Toluene	ND	3.05		mg/kg	3.02	101%	45 - 145	10A0823	NTA0402-10RE 1	01/09/10 07:00
Xylenes, total	ND	8.81		mg/kg	9.06	97%	31 - 159	10A0823	NTA0402-10RE 1	01/09/10 07:00
<i>Surrogate: 1,2-Dichloroethane-d4</i>		58.4		ug/kg	50.0	117%	67 - 138	10A0823	NTA0402-10RE 1	01/09/10 07:00
<i>Surrogate: Dibromoformmethane</i>		50.7		ug/kg	50.0	101%	75 - 125	10A0823	NTA0402-10RE 1	01/09/10 07:00
<i>Surrogate: Toluene-d8</i>		48.5		ug/kg	50.0	97%	76 - 129	10A0823	NTA0402-10RE 1	01/09/10 07:00
<i>Surrogate: 4-Bromofluorobenzene</i>		50.5		ug/kg	50.0	101%	67 - 147	10A0823	NTA0402-10RE 1	01/09/10 07:00
Polyaromatic Hydrocarbons by EPA 8270D										
10A0839-MS1										
Acenaphthene										
Acenaphthylene	ND	1.24		mg/kg	1.64	76%	42 - 120	10A0839	NTA0402-01	01/16/10 13:51
Anthracene	ND	1.23		mg/kg	1.64	75%	32 - 120	10A0839	NTA0402-01	01/16/10 13:51
Benzo (a) anthracene	ND	1.43		mg/kg	1.64	87%	10 - 200	10A0839	NTA0402-01	01/16/10 13:51
Benzo (a) pyrene	ND	1.30		mg/kg	1.64	79%	41 - 120	10A0839	NTA0402-01	01/16/10 13:51
Benzo (b) fluoranthene	ND	1.37		mg/kg	1.64	84%	33 - 121	10A0839	NTA0402-01	01/16/10 13:51
Benzo (g,h,i) perylene	ND	1.36		mg/kg	1.64	83%	26 - 137	10A0839	NTA0402-01	01/16/10 13:51
Benzo (k) fluoranthene	ND	1.34		mg/kg	1.64	82%	21 - 124	10A0839	NTA0402-01	01/16/10 13:51
Chrysene	ND	1.29		mg/kg	1.64	79%	14 - 140	10A0839	NTA0402-01	01/16/10 13:51
Dibenz (a,h) anthracene	ND	1.29		mg/kg	1.64	82%	28 - 123	10A0839	NTA0402-01	01/16/10 13:51
Fluoranthene	ND	1.29		mg/kg	1.64	82%	38 - 120	10A0839	NTA0402-01	01/16/10 13:51
Fluorene	ND	1.26		mg/kg	1.64	77%	41 - 120	10A0839	NTA0402-01	01/16/10 13:51
Indeno (1,2,3-cd) pyrene	ND	1.39		mg/kg	1.64	85%	25 - 123	10A0839	NTA0402-01	01/16/10 13:51
Naphthalene	ND	0.962		mg/kg	1.64	59%	25 - 120	10A0839	NTA0402-01	01/16/10 13:51
Phenanthrene	ND	1.28		mg/kg	1.64	78%	37 - 120	10A0839	NTA0402-01	01/16/10 13:51
Pyrene	0.0457	1.34		mg/kg	1.64	79%	29 - 125	10A0839	NTA0402-01	01/16/10 13:51
1-Methylnaphthalene	ND	1.01		mg/kg	1.64	61%	19 - 120	10A0839	NTA0402-01	01/16/10 13:51
2-Methylnaphthalene	ND	1.07		mg/kg	1.64	65%	11 - 120	10A0839	NTA0402-01	01/16/10 13:51
<i>Surrogate: Terphenyl-d14</i>		1.19		mg/kg	1.64	73%	18 - 120	10A0839	NTA0402-01	01/16/10 13:51
<i>Surrogate: 2-Fluorobiphenyl</i>		1.02		mg/kg	1.64	63%	14 - 120	10A0839	NTA0402-01	01/16/10 13:51
<i>Surrogate: Nitrobenzene-d5</i>		0.909		mg/kg	1.64	56%	17 - 120	10A0839	NTA0402-01	01/16/10 13:51

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

PROJECT QUALITY CONTROL DATA
Matrix Spike - Cont.

Analyte	Orig. Val.	MS Val	Q	Units	Spike Conc	% Rec.	Target Range	Batch	Sample Spiked	Analyzed Date/Time
---------	------------	--------	---	-------	------------	--------	--------------	-------	---------------	--------------------

Polyaromatic Hydrocarbons by EPA 8270D

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

PROJECT QUALITY CONTROL DATA

Matrix Spike Dup

Analyte	Orig. Val.	Duplicate	Q	Units	Spike Conc	% Rec.	Target Range	RPD	Limit	Batch	Sample Duplicated	Analyzed Date/Time
Selected Volatile Organic Compounds by EPA Method 8260B												
10A0823-MSD1												
Benzene	ND	2.89		mg/kg	3.02	96%	42 - 141	9	50	10A0823	NTA0402-10R E1	01/09/10 07:30
Ethylbenzene	ND	2.99		mg/kg	3.02	99%	21 - 165	0.7	50	10A0823	NTA0402-10R E1	01/09/10 07:30
Naphthalene	ND	3.28		mg/kg	3.02	109%	10 - 160	3	50	10A0823	NTA0402-10R E1	01/09/10 07:30
Toluene	ND	2.89		mg/kg	3.02	96%	45 - 145	5	50	10A0823	NTA0402-10R E1	01/09/10 07:30
Xylenes, total	ND	8.88		mg/kg	9.06	98%	31 - 159	0.7	50	10A0823	NTA0402-10R E1	01/09/10 07:30
Surrogate: 1,2-Dichloroethane-d4		55.4		ug/kg	50.0	111%	67 - 138			10A0823	NTA0402-10R E1	01/09/10 07:30
Surrogate: Dibromoformmethane		48.0		ug/kg	50.0	96%	75 - 125			10A0823	NTA0402-10R E1	01/09/10 07:30
Surrogate: Toluene-d8		48.4		ug/kg	50.0	97%	76 - 129			10A0823	NTA0402-10R E1	01/09/10 07:30
Surrogate: 4-Bromofluorobenzene		53.1		ug/kg	50.0	106%	67 - 147			10A0823	NTA0402-10R E1	01/09/10 07:30
Polyaromatic Hydrocarbons by EPA 8270D												
10A0839-MSD1												
Acenaphthene	ND	1.33		mg/kg	1.67	80%	42 - 120	7	40	10A0839	NTA0402-01	01/16/10 14:14
Acenaphthylene	ND	1.35		mg/kg	1.67	81%	32 - 120	9	30	10A0839	NTA0402-01	01/16/10 14:14
Anthracene	ND	1.48		mg/kg	1.67	89%	10 - 200	4	50	10A0839	NTA0402-01	01/16/10 14:14
Benzo (a) anthracene	ND	1.37		mg/kg	1.67	82%	41 - 120	5	30	10A0839	NTA0402-01	01/16/10 14:14
Benzo (a) pyrene	ND	1.41		mg/kg	1.67	85%	33 - 121	3	33	10A0839	NTA0402-01	01/16/10 14:14
Benzo (b) fluoranthene	ND	1.45		mg/kg	1.67	87%	26 - 137	6	42	10A0839	NTA0402-01	01/16/10 14:14
Benzo (g,h,i) perylene	ND	1.47		mg/kg	1.67	88%	21 - 124	9	32	10A0839	NTA0402-01	01/16/10 14:14
Benzo (k) fluoranthene	ND	1.35		mg/kg	1.67	81%	14 - 140	5	39	10A0839	NTA0402-01	01/16/10 14:14
Chrysene	ND	1.35		mg/kg	1.67	81%	28 - 123	5	34	10A0839	NTA0402-01	01/16/10 14:14
Dibenz (a,h) anthracene	ND	1.45		mg/kg	1.67	87%	25 - 127	8	31	10A0839	NTA0402-01	01/16/10 14:14
Fluoranthene	ND	1.39		mg/kg	1.67	83%	38 - 120	4	35	10A0839	NTA0402-01	01/16/10 14:14
Fluorene	ND	1.34		mg/kg	1.67	80%	41 - 120	6	37	10A0839	NTA0402-01	01/16/10 14:14
Indeno (1,2,3-cd) pyrene	ND	1.49		mg/kg	1.67	89%	25 - 123	7	32	10A0839	NTA0402-01	01/16/10 14:14
Naphthalene	ND	1.04		mg/kg	1.67	63%	25 - 120	8	42	10A0839	NTA0402-01	01/16/10 14:14
Phenanthrene	ND	1.34		mg/kg	1.67	81%	37 - 120	5	32	10A0839	NTA0402-01	01/16/10 14:14
Pyrene	0.0457	1.43		mg/kg	1.67	83%	29 - 125	6	40	10A0839	NTA0402-01	01/16/10 14:14
1-Methylnaphthalene	ND	1.08		mg/kg	1.67	65%	19 - 120	7	45	10A0839	NTA0402-01	01/16/10 14:14
2-Methylnaphthalene	ND	1.16		mg/kg	1.67	69%	11 - 120	8	50	10A0839	NTA0402-01	01/16/10 14:14
Surrogate: Terphenyl-d14		1.24		mg/kg	1.67	74%	18 - 120			10A0839	NTA0402-01	01/16/10 14:14
Surrogate: 2-Fluorobiphenyl		1.16		mg/kg	1.67	69%	14 - 120			10A0839	NTA0402-01	01/16/10 14:14
Surrogate: Nitrobenzene-d5		1.02		mg/kg	1.67	61%	17 - 120			10A0839	NTA0402-01	01/16/10 14:14

Client	EEG - Small Business Group, Inc. (2449) 10179 Highway 78 Ladson, SC 29456	Work Order:	NTA0402
Attn	Tom McElwee	Project Name:	Laurel Bay Housing Project
		Project Number:	[none]
		Received:	01/08/10 08:00

CERTIFICATION SUMMARY

TestAmerica Nashville

Method	Matrix	AIHA	Nelac	South Carolina
SW846 8260B	Soil	N/A	X	X
SW846 8270D	Soil		X	X
SW-846	Soil			

Client EEG - Small Business Group, Inc. (2449)
10179 Highway 78
Ladson, SC 29456
Attn Tom McElwee

Work Order: NTA0402
Project Name: Laurel Bay Housing Project
Project Number: [none]
Received: 01/08/10 08:00

DATA QUALIFIERS AND DEFINITIONS

- J** Analyte detected at a level less than the Reporting Limit (RL) and greater than or equal to the Method Detection Limit (MDL). Concentrations within this range are estimated.
- ND** Not detected at the reporting limit (or method detection limit if shown)

METHOD MODIFICATION NOTES



COOLER RECEIPT

NTA0402

Cooler Received/Opened On 1/8/2010 @ 0800

1. Tracking # 4270 (last 4 digits, FedEx)

Courier: FedEx IR Gun ID Raynger

2. Temperature of rep. sample or temp blank when opened: 1.6 Degrees Celsius

3. If Item #2 temperature is 0°C or less, was the representative sample or temp blank frozen? YES...NO...NA

4. Were custody seals on outside of cooler? 2 front YES...NO...NA

If yes, how many and where:

5. Were the seals intact, signed, and dated correctly? YES...NO...NA

6. Were custody papers inside cooler? YES...NO...NA

I certify that I opened the cooler and answered questions 1-6 (initial) 17. Were custody seals on containers: YES NO and Intact YES...NO...NA

Were these signed and dated correctly? YES...NO...NA

8. Packing mat'l used? Bubblewrap Plastic bag Peanuts Vermiculite Foam Insert Paper Other None

9. Cooling process: Ice Ice-pack Ice (direct contact) Dry ice Other None

10. Did all containers arrive in good condition (unbroken)? YES...NO...NA

11. Were all container labels complete (#, date, signed, pres., etc)? YES...NO...NA

12. Did all container labels and tags agree with custody papers? YES...NO...NA

13a. Were VOA vials received? YES...NO...NA

b. Was there any observable headspace present in any VOA vial? YES...NO...NA

14. Was there a Trip Blank in this cooler? YES...NO...NA If multiple coolers, sequence # 1I certify that I unloaded the cooler and answered questions 7-14 (initial) 1

15a. On pres'd bottles, did pH test strips suggest preservation reached the correct pH level? YES...NO...NA

b. Did the bottle labels indicate that the correct preservatives were used YES...NO...NA

16. Was residual chlorine present? YES...NO...NA

I certify that I checked for chlorine and pH as per SOP and answered questions 15-16 (initial) 1

17. Were custody papers properly filled out (ink, signed, etc)? YES...NO...NA

18. Did you sign the custody papers in the appropriate place? YES...NO...NA

19. Were correct containers used for the analysis requested? YES...NO...NA

20. Was sufficient amount of sample sent in each container? YES...NO...NA

I certify that I entered this project into LIMS and answered questions 17-20 (initial) 1I certify that I attached a label with the unique LIMS number to each container (initial) 1

21. Were there Non-Conformance issues at login? YES...NO...# Was a PIPE generated? YES...NO...#

TestAmerica

LEADERS IN ENVIRONMENTAL ANALYSIS

Nashville Division
2960 Foster Creighton
Nashville, TN 37204

Phone: 615-726-0177
Toll Free: 800-765-0980
Fax: 615-726-3404

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?

Client Name/Account #: EEG # 2449

Address: 10179 Highway 78


City/State/Zip: Ladson, SC 29458

Project Manager: Tom McElwee email: mcelwee@eeginc.net

Telephone Number: 843.412.2097

Fax No. (843) 879-0401

Sampler Name: (Print) Pratt Shaw

Sampler Signature: 

Compliance Monitoring? Yes No

Enforcement Action? Yes No

Site State: SC

PO# 082S

TA Quote #:

Project ID: Laurel Bay Housing Project

Project #:

Analyze For:

NTA0402

01/22/10 23:59

RUSH TAT (Pre-Schedule)

Sample ID / Description	Date Sampled	Time Sampled	No. of Containers Shipped	Grab	Composite	Field Filtered	Ice	HNO ₃ (Red Label)	NSF (Blue Label)	HCl (Orange Label)	H ₂ SO ₄ Plastic (Yellow Label)	H ₂ SO ₄ Glass (Yellow Label)	None (Black Label)	None (Specific) 	Preservative			Matrix	Analyze For:			
															Groundwater	Wastewater	Drinking Water	Sludge	Soil	Other (Specify):		
657 Camellia	1/5/10	0930	5	X											21			X	3	3	3	4
658 Camellia	1/5/10	1115	5	X											21			X	2	2	2	2
662 Camellia	1/5/10	1430	5	X											21			X	3	2	3	3
664 Camellia	1/5/10	1600	5	X											21			X	3	2	3	4
668 Camellia	1/5/10	1030	5	X											21			X	3	2	3	5
667 Camellia	1/6/10	1200	5	X											21			X	3	2	3	6
665 Camellia	1/6/10	1545	5	X											21			X	3	2	3	7
663 Camellia	1/7/10	0945	5	X											21			X	3	2	3	8
696 Abelia	1/7/10	1205	5	X											21			X	3	2	3	7
716 Blueball	1/7/10	1545	5	X											21			X	3	2	3	10

Special Instructions:

Laboratory Comments:

Temperature Upon Receipt:
VOCs Free of Headspace?

1-6

Y

Relinquished by: 	Date: 1/7/10	Time: 1900	Received by: K. Collier	Method of Shipment:		FEDEX Date: 1/7/10	Time: 2000
				Date	Time		
Relinquished by: 	Date: 1/8/10	Time: 0800	Received by TestAmerica: S. L. C.	Date: 1/8/10	Time: 0800		

ATTACHMENT A



NON-HAZARDOUS MANIFEST

CWM

Print or type. (Form designed for use on elite (12-pitch) typewriter.)

NON-HAZARDOUS MANIFEST		1. Generator's US EPA ID No.	Manifest Document No.	2. Page 1 of 1
3. Generator's Name and Mailing Address MCAS, Beaufort Laurel Bay Housing Beaufort SC 29904		A. Manifest Number WMNA 10885442		
4. Generator's Phone 843 228-6460		B. State Generator's ID		
5. Transporter 1 Company Name EEG, Inc.		6. US EPA ID Number	C. State Transporter's ID	
7. Transporter 2 Company Name		8. US EPA ID Number	D. Transporter's Phone 843 878-0411	
9. Designated Facility Name and Site Address HICKORY HILL LANDFILL ROUTE 1, BOX 121 RIDGELEAD SC 29936		10. US EPA ID Number	E. State Transporter's ID	
11. Description of Waste Materials a. Heating Oil Tank filled with Sand		12. Containers No.	13. Total Quantity	14. Unit Wt/Vol
GENERATOR	WM Profile # 1028558C	0 0 1	8.62	TN
	WM Profile #			
	WM Profile #			
	WM Profile #			
J. Additional Descriptions for Materials Listed Above Landfill _____ Solidification _____ Bio Remediation _____		K. Disposal Location Cell _____ Level _____ Grid _____		
15. Special Handling Instructions and Additional Information 5EA US9's from: D 1663 Canatlia Purchase Order #		2) 696 Abelia 4) 712 Bluebell 3) 716 Bluebell 5) 700 Bluebell EMERGENCY CONTACT:		
16. GENERATOR'S CERTIFICATION: I hereby certify that the above-described materials are not hazardous wastes as defined by 40 CFR Part 261 or any applicable state law, have been fully and accurately described, classified and packaged, and are in proper condition for transportation according to applicable regulations.				
Printed/Typed Name W.G. Dukes, Jr.		Signature "On behalf of" <i>[Signature]</i> Month Day Year 01/11/90		
17. Transporter 1 Acknowledgement of Receipt of Materials Printed/Typed Name James Baldwin Signature <i>[Signature]</i> Month Day Year 01/11/90				
18. Transporter 2 Acknowledgement of Receipt of Materials Printed/Typed Name _____ Signature _____ Month Day Year				
19. Certificate of Final Treatment/Disposal I certify, on behalf of the above listed treatment facility, that to the best of my knowledge, the above-described waste was managed in compliance with all applicable laws, regulations, permits and licenses on the dates listed above.				
20. Facility Owner or Operator: Certification of receipt of non-hazardous materials covered by this manifest. Printed/Typed Name Jan Collins Signature <i>[Signature]</i> Month Day Year 01/11/90				

Appendix C
Regulatory Correspondence

BOARD:
Paul C. Aughtry, III
Chairman

Edwin H. Cooper, III
Vice Chairman

Steven G. Kisner
Secretary



C. Earl Hunter, Commissioner
Promoting Bureau of Land and Waste Management Environment
Division of Waste Management

BOARD:
Henry C. Scott

M. David Mitchell, MD
Glenn A. McCall

Coleman F. Buckhouse, MD

November 23, 2010

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United States Marine Corp Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: No Further Action
Laurel Bay Underground Storage Tank Assessment Report for:

- 609 Dahlia
- 621 Dahlia
- 622 Dahlia
- 605 Dahlia
- 357 Aspen
- 412 Elderberry
- 658 Camellia
- 663 Camellia
- 696 Abelia
- 624 Dahlia
- 653 Camellia
- 654 Camellia
- 608 Dahlia
- 367 Aspen
- 416 Elderberry
- 657 Camellia
- 664 Camellia
- 716 Bluebell
- 597 Aster
- 598 Aster
- 596 Aster
- 613 Dahlia
- 618 Dahlia
- 418 Elderberry
- 426 Elderberry
- 667 Camellia
- 600 Dahlia
- 601 Dahlia
- 604 Dahlia
- 615 Dahlia
- 617 Dahlia
- 368 Aspen
- 422 Elderberry
- 668 Camellia

Dear Mr. Drawdy,

The South Carolina Department of Health and Environmental Control (the Department) received the above referenced Underground Storage Tanks (USTs) Assessment Report on February 17, 2010 and April 22, 2010 for the addresses listed above.

The Department has reviewed the referenced assessment report along with the additional information submitted and agrees there is no indication of soil or groundwater contamination on this property, and therefore no further investigation is required at this time.

Please note that the Department's decision is based on information provided by the Marine Corp Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary. If you have any questions, please contact me at picketcn@dhec.sc.gov or 803-896-4131.

Sincerely,

Christi Pickett
Corrective Action Engineering Section
Bureau of Land and Waste Management
South Carolina Department of Health and Environmental Control

cc: Laurel Rhoten (via email)
Craig Ehde (via email)