

SUMMARY REPORT
310 BLUEBELL LANE (FORMERLY 731 BLUEBELL LANE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid-Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

JUNE 2021

SUMMARY REPORT
310 BLUEBELL LANE (FORMERLY 731 BLUEBELL LANE)
LAUREL BAY MILITARY HOUSING AREA
MARINE CORPS AIR STATION BEAUFORT
BEAUFORT, SC

Revision: 0
Prepared for:

Department of the Navy
Naval Facilities Engineering Command, Mid- Atlantic
9324 Virginia Avenue
Norfolk, Virginia 23511-3095

and



Naval Facilities Engineering Command Atlantic

9324 Virginia Avenue
Norfolk, Virginia 23511-3095

Prepared by:



CDM - AECOM Multimedia Joint Venture
10560 Arrowhead Drive, Suite 500
Fairfax, Virginia 22030

Contract Number: N62470-14-D-9016
CTO WE52
JUNE 2021

Table of Contents

1.0	INTRODUCTION.....	1
1.1	BACKGROUND INFORMATION.....	1
1.2	UST REMOVAL AND ASSESSMENT PROCESS.....	2
2.0	SAMPLING ACTIVITIES AND RESULTS.....	3
2.1	UST REMOVAL AND SOIL SAMPLING	3
2.2	SOIL ANALYTICAL RESULTS.....	4
3.0	PROPERTY STATUS	4
4.0	REFERENCES.....	4

Table

Table 1	Laboratory Analytical Results - Soil
---------	--------------------------------------

Appendices

Appendix A	Multi-Media Selection Process for LBMH
Appendix B	UST Assessment Report
Appendix C	Regulatory Correspondence

List of Acronyms

bgs	below ground surface
BTEX	benzene, toluene, ethylbenzene, and xylenes
CTO	Contract Task Order
COPC	constituents of potential concern
IDIQ	Indefinite Delivery, Indefinite Quantity
IGWA	Initial Groundwater Assessment
JV	Joint Venture
LBMH	Laurel Bay Military Housing
MCAS	Marine Corps Air Station
NAVFAC Mid-Lant	Naval Facilities Engineering Command Mid-Atlantic
NFA	No Further Action
PAH	polynuclear aromatic hydrocarbon
QAPP	Quality Assurance Program Plan
RBSL	risk-based screening level
SCDHEC	South Carolina Department of Health and Environmental Control
Site	LBMH area at MCAS Beaufort, South Carolina
UST	underground storage tank
VISL	vapor intrusion screening level

1.0 INTRODUCTION

The CDM - AECOM Multimedia Joint Venture (JV) was contracted by the Naval Facilities Engineering Command, Mid-Atlantic (NAVFAC Mid-Lant) to provide reporting services for the heating oil underground storage tanks (USTs) located in Laurel Bay Military Housing (LBMH) area at the Marine Corps Air Station (MCAS) Beaufort, South Carolina (Site). This work has been awarded under Contract Task Order (CTO) WE52 of the Indefinite Delivery, Indefinite Quantity (IDIQ) Multimedia Environmental Compliance Contract (Contract No. N62470-14-D-9016).

As of January 2014, the LBMH addresses were re-numbered to comply with the E-911 emergency response addressing system; however, in order to remain consistent with historical sampling and reporting for LBMH area, the residences will continue to be referenced with their original address numbers in sample nomenclature and reporting documents.

This report summarizes the results the environmental investigation activities associated with the storage of home heating oil and the potential release of petroleum constituents at the referenced property. Based on the results of the investigation, a No Further Action (NFA) determination has been made by the South Carolina Department of Health and Environmental Control (SCDHEC) for 310 Bluebell Lane (Formerly 731 Bluebell Lane). This NFA determination indicates that there are no unacceptable risks to human health or the environment for the petroleum constituents associated with the home heating oil USTs. The following information is included in this report:

- Background information;
- Sampling activities and results; and
- A determination of the property status.

1.1 Background Information

The LBMH area is located approximately 3.5 miles west of MCAS Beaufort. The area is approximately 970 acres in size and serves as an enlisted and officer family housing area. The area is configured with single family and duplex residential structures, and includes recreation, open space, and community facilities. The community includes approximately 1,300 housing units, including legacy Capehart style homes and newer duplex style homes. The housing area

is bordered on the west by salt marshes and the Broad River, and to the north, east and south by uplands. Forested areas lie along the northern and northeastern borders.

Capehart style homes within the LBMH area were formerly heated using heating oil stored in USTs at each residence. There were 1,100 Capehart style housing units in the LBMH area. The newer duplex homes within the LBMH area never utilized heating oil tanks. Heating oil has not been used at Laurel Bay since the mid-1980s. As was the accepted practice at the time, USTs were drained, filled with dirt, capped, and left in place when they were removed from service. Residential USTs are not regulated in the State of South Carolina (i.e., there are no federal or state laws governing installation, management, or removal).

In 2007, MCAS Beaufort began a voluntary program to remove the unregulated, residential USTs and conduct sampling activities to determine if, and to what extent, petroleum constituents may have impacted the surrounding environment. MCAS Beaufort coordinated with SCDHEC to develop removal procedures that were consistent with procedural requirements for regulated USTs. All tank removal activities and follow-on actions are conducted in coordination with SCDHEC. To date, all known USTs have been removed from all residential properties within the LBMH area.

1.2 UST Removal and Assessment Process

During the UST removal process, a soil sample was collected from beneath the UST excavations (approximately 4 to 6 feet [ft] below ground surface [bgs]) and analyzed for a predetermined list of constituents of potential concern (COPCs) associated with the petroleum compounds found in home heating oil. These COPCs, derived from the *Quality Assurance Program Plan (QAPP) for the Underground Storage Tank Management Division, Revision 3.1* (SCDHEC, 2016) and the *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, (SCDHEC, 2018), are as follows:

- benzene, toluene, ethylbenzene, and xylenes (BTEX),
- naphthalene, and
- five select polynuclear aromatic hydrocarbon (PAHs): benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene and dibenz(a,h)anthracene.

Soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form. In accordance with SCDHEC's *QAPP for the UST Management*

Division (SCDHEC, 2016), the soil screening levels consists of SCDHEC risk-based screening levels (RBSLs). It should be noted that the RBSLs for select PAHs were revised in Revision 2.0 of the QAPP (SCDHEC, 2013) and were revised again in Revision 3.0 (SCDHEC, 2015). The screening levels used for evaluation at each site were those levels that were in effect at the time of reporting and review by SCDHEC.

The results of the soil sampling at each former UST location were used to determine if a potential for groundwater contamination exists (i.e., soil results greater than RBSLs) and subsequently to select properties for follow-up initial groundwater assessment (IGWA) sampling. The results of the IGWA sampling (if necessary) are used to determine the presence or absence of the aforementioned COPCs in groundwater and identify whether former UST locations will require additional delineation of COPCs in groundwater. In order to delineate the extent of impact to groundwater, permanent wells are installed and a sampling program is established for those former UST locations where IGWA sampling has indicated the presence of COPCs in excess of the SCDHEC RBSLs for groundwater. Groundwater analytical results are also compared to the site specific groundwater vapor intrusion screening levels (VISLs) to evaluate the potential for vapor intrusion and the necessity for an investigation associated with this media. A multi-media investigation selection process tree, applicable to the LBMH UST investigations, is presented as Appendix A.

2.0 SAMPLING ACTIVITIES AND RESULTS

The following section presents the sampling activities and associated results for 310 Bluebell Lane (Formerly 731 Bluebell Lane). Details regarding the soil investigation at this site are provided in the *SCDHEC UST Assessment Report – 731 Bluebell Lane* (MCAS Beaufort, 2013). The UST Assessment Report is provided in Appendix B.

2.1 UST Removal and Soil Sampling

On December 6, 2012, a single 280 gallon heating oil UST was removed from the concrete porch area at 310 Bluebell Lane (Formerly 731 Bluebell Lane). The former UST location is indicated on Figures 2 and 3 of the UST Assessment Report (Appendix B). The UST was removed and properly disposed of (i.e., shipped offsite for recycling or transported to a landfill). There was no visual evidence (i.e., staining or sheen) of petroleum impact at the time of the UST removal. According to the UST Assessment Report (Appendix B), the depth to the base of

the UST was 6'0" bgs and a single soil sample was collected from that depth. The sample was collected from the fill port side of the former UST to represent a worst case scenario.

Following UST removal, a soil sample was collected from the base of the excavation and shipped to an offsite laboratory for analysis of the petroleum COPCs. Sampling was performed in accordance with applicable South Carolina regulation R.61-92, Part 280 (SCDHEC, 2017) and assessment guidelines.

2.2 Soil Analytical Results

A summary of the laboratory analytical results and SCDHEC RBSLs is presented in Table 1. A copy of the laboratory analytical data report is included in the UST Assessment Report presented in Appendix B. The laboratory analytical data report includes the soil results for the additional PAHs that were analyzed, but do not have associated RBSLs.

The soil sample results were submitted by MCAS Beaufort to SCDHEC utilizing SCDHEC's UST Assessment Report form (Appendix B). The results of the soil sampling at the former UST location were used by MCAS Beaufort, in consultation with SCDHEC, to determine a path forward (i.e., additional sampling or NFA) for the property. The soil results collected from 310 Bluebell Lane (Formerly 731 Bluebell Lane) were less than the SCDHEC RBSLs, which indicated the subsurface was not impacted by COPCs associated with the former UST at concentrations that presented a potential risk to human health and the environment.

3.0 PROPERTY STATUS

Based on the analytical results for soil, SCDHEC made the determination that NFA was required for 310 Bluebell Lane (Formerly 731 Bluebell Lane). This NFA determination was obtained in a letter dated May 15, 2014. SCDHEC's NFA letter is provided in Appendix C.

4.0 REFERENCES

Marine Corps Air Station Beaufort, 2013. *South Carolina Department of Health and Environmental Control (SCDHEC) Underground Storage Tank Assessment Report – 731 Bluebell Lane, Laurel Bay Military Housing Area*, April 2013.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2013. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 2.0*, April 2013.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2015. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.0*, May 2015.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2016. *Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 3.1*, February 2016.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2017. *R.61-92, Part 280, Underground Storage Tank Control Regulations*, March 2017.

South Carolina Department of Health and Environmental Control Bureau of Land and Waste Management, 2018. *Underground Storage Tank Assessment Instructions for Permanent Closure and Change-In-Service*, March 2018.

Table

Table 1
Laboratory Analytical Results - Soil
310 Bluebell Lane (Formerly 731 Bluebell Lane)
Laurel Bay Military Housing Area
Marine Corps Air Station Beaufort
Beaufort, South Carolina

Constituent	SCDHEC RBSLs ⁽¹⁾	Results Sample Collected 12/06/12
Volatile Organic Compounds Analyzed by EPA Method 8260B (mg/kg)		
Benzene	0.003	ND
Ethylbenzene	1.15	ND
Naphthalene	0.036	ND
Toluene	0.627	ND
Xylenes, Total	13.01	ND
Semivolatile Organic Compounds Analyzed by EPA Method 8270D (mg/kg)		
Benzo(a)anthracene	0.66	ND
Benzo(b)fluoranthene	0.66	ND
Benzo(k)fluoranthene	0.66	ND
Chrysene	0.66	ND
Dibenz(a,h)anthracene	0.66	ND

Notes:

⁽¹⁾ South Carolina Risk-Based Screening Levels from the Quality Assurance Program Plan for the Underground Storage Tank Management Division, Revision 2.0 (SCDHEC, April 2013).

Bold font indicates the analyte was detected.

Bold font and shading indicates the concentration exceeds the SCDHEC RBSL.

EPA - United States Environmental Protection Agency


mg/kg - milligram per kilogram

ND - not detected at the reporting limit (or method detection limit if shown on the laboratory report). The laboratory report is provided in Appendix B.

RBSL - Risk-Based Screening Level

SCDHEC - South Carolina Department Of Health and Environmental Control

Appendix A
Multi-Media Selection Process for LBMH

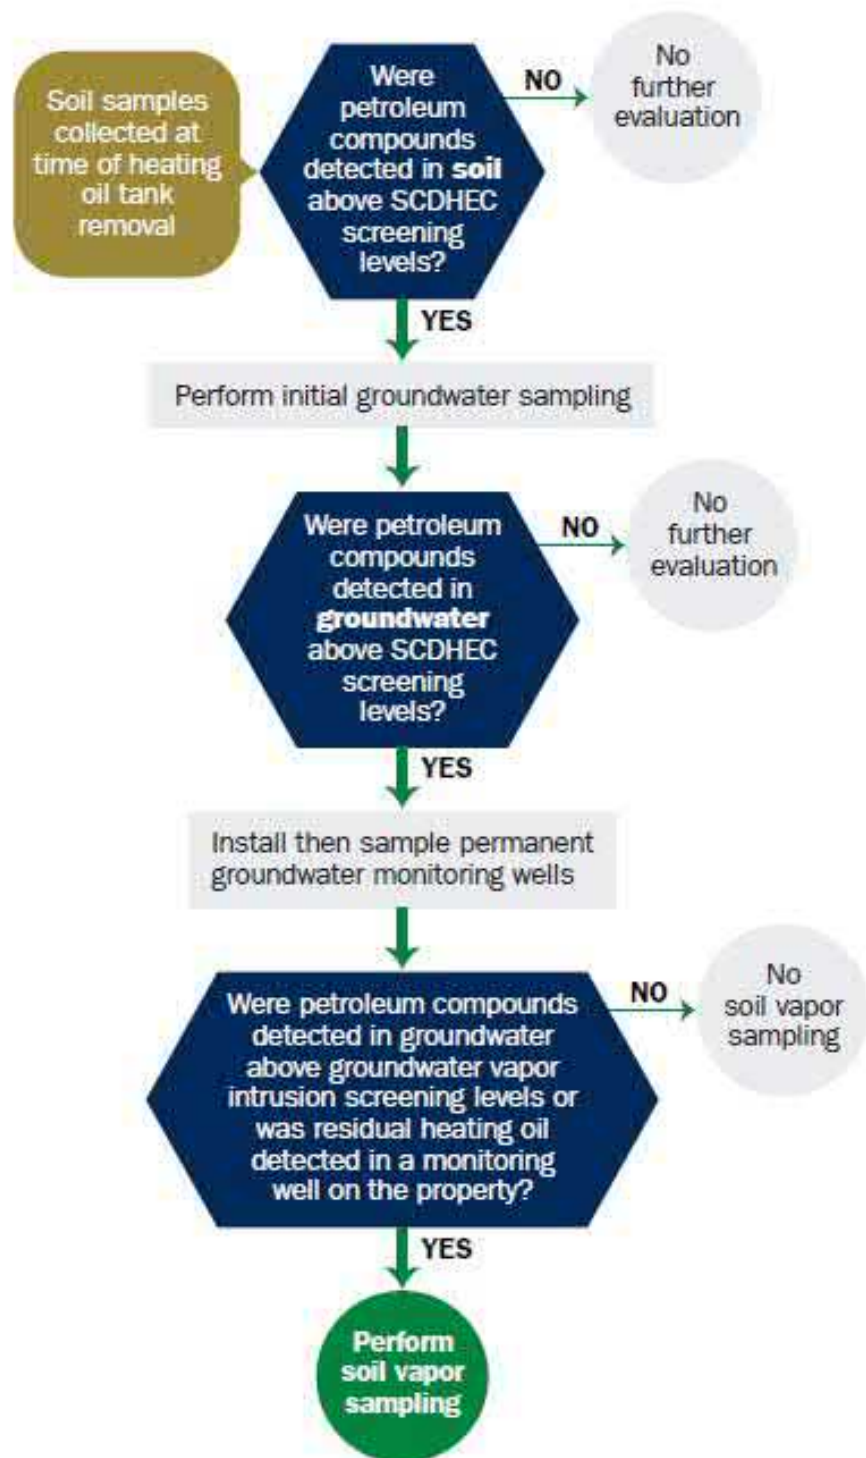

Appendix A - Multi-Media Selection Process for LBMH

Appendix B
UST Assessment Report

Attachment 1

South Carolina Department of Health and Environmental Control (SCDHEC)
Underground Storage Tank (UST) Assessment Report

Date Received

State Use Only

Submit Completed Form To:
 UST Program
 SCDHEC
 2600 Bull Street
 Columbia, South Carolina 29201
 Telephone (803) 896-7957

I. OWNERSHIP OF UST (S)

MCAS Beaufort, Commanding Officer Attn: NREAO (Craig Ehde)

Owner Name (Corporation, Individual, Public Agency, Other)

P.O. Box 55001

Mailing Address

Beaufort,
CitySouth Carolina
State29904-5001
Zip Code843
Area Code228-7317
Telephone NumberCraig Ehde
Contact Person**II. SITE IDENTIFICATION AND LOCATION**

Permit I.D. #

Laurel Bay Military Housing Area, Marine Corps Air Station, Beaufort, SC
Facility Name or Company Site Identifier731 Bluebell Lane, Laurel Bay Military Housing Area
Street Address or State Road (as applicable)Beaufort,
CityBeaufort
County

Attachment 2

III. INSURANCE INFORMATION

Insurance Statement

The petroleum release reported to DHEC on _____ at Permit ID Number _____ may qualify to receive state monies to pay for appropriate site rehabilitation activities. Before participation is allowed in the State Clean-up fund, written confirmation of the existence or non-existence of an environmental insurance policy is required. **This section must be completed.**

Is there now, or has there ever been an insurance policy or other financial mechanism that covers this UST release? **YES** ____ **NO** ____ (check one)

If you answered **YES** to the above question, please complete the following information:

My policy provider is: _____
The policy deductible is: _____
The policy limit is: _____

If you have this type of insurance, please include a copy of the policy with this report.

IV. REQUEST FOR SUPERB FUNDING

I **DO** / **DO NOT** wish to participate in the SUPERB Program. (Circle one.)

V. CERTIFICATION (To be signed by the UST owner)

I certify that I have personally examined and am familiar with the information submitted in this and all attached documents; and that based on my inquiry of those individuals responsible for obtaining this information, I believe that the submitted information is true, accurate, and complete.

Name (Type or print.)

Signature

To be completed by Notary Public:

Sworn before me this _____ day of _____, 20____

(Name)

Notary Public for the state of _____.
Please affix State seal if you are commissioned outside South Carolina

VI. UST INFORMATION

- A. Product...(ex. Gas, Kerosene).....
- B. Capacity..(ex. 1k, 2k).....
- C. Age.....
- D. Construction Material..(ex. Steel, FRP).....
- E. Month/Year of Last Use.....
- F. Depth (ft.) To Base of Tank.....
- G. Spill Prevention Equipment Y/N.....
- H. Overfill Prevention Equipment Y/N.....
- I. Method of Closure Removed/Filled.....
- J. Date Tanks Removed/Filled.....
- K. Visible Corrosion or Pitting Y/N.....
- L. Visible Holes Y/N.....

731Bluebell		
Heating oil		
280 gal		
Late 1950s		
Steel		
Mid 80s		
6'		
No		
No		
Removed		
12/6/2012		
Yes		
Yes		

- M. Method of disposal for any USTs removed from the ground (attach disposal manifests)
UST 731Bluebell was removed from the ground and disposed at a
Subtitle "D" landfill. See Attachment "A".
-
- N. Method of disposal for any liquid petroleum, sludges, or wastewaters removed from the USTs (attach disposal manifests)
UST 731Bluebell had been previously filled with sand by others.
-
- O. If any corrosion, pitting, or holes were observed, describe the location and extent for each UST
Corrosion, pitting and holes were present throughout the tank.

VII. PIPING INFORMATION

- A. Construction Material..(ex. Steel, FRP).....
- B. Distance from UST to Dispenser.....
- C. Number of Dispensers.....
- D. Type of System Pressure or Suction.....
- E. Was Piping Removed from the Ground? Y/N
- F. Visible Corrosion or Pitting Y/N.....
- G. Visible Holes Y/N.....
- H. Age.....

731Bluebell		
Steel & Copper		
N/A		
N/A		
Suction		
No		
Yes		
No		
Late 1950s		

- I. If any corrosion, pitting, or holes were observed, describe the location and extent for each piping run.

Corrosion and pitting were found on the surface of the steel vent pipe. Copper supply and return lines were sound.

VIII. BRIEF SITE DESCRIPTION AND HISTORY

The USTs at the residences are constructed of single wall steel and formerly contained fuel oil for heating. These USTs were installed in the late 1950s and last used in the mid 1980s.

IX. SITE CONDITIONS

	Yes	No	Unk
A. Were any petroleum-stained or contaminated soils found in the UST excavation, soil borings, trenches, or monitoring wells? If yes, indicate depth and location on the site map.		X	
B. Were any petroleum odors detected in the excavation, soil borings, trenches, or monitoring wells? If yes, indicate location on site map and describe the odor (strong, mild, etc.)		X	
C. Was water present in the UST excavation, soil borings, or trenches? If yes, how far below land surface (indicate location and depth)?		X	
D. Did contaminated soils remain stockpiled on site after closure? If yes, indicate the stockpile location on the site map. Name of DHEC representative authorizing soil removal:		X	
E. Was a petroleum sheen or free product detected on any excavation or boring waters? If yes, indicate location and thickness.		X	

X. SAMPLE INFORMATION

A. SCDHEC Lab Certification Number 84009

B.

Sample #	Location	Sample Type (Soil/Water)	Soil Type (Sand/Clay)	Depth*	Date/Time of Collection	Collected by	OVA #
731 Bluebell	Excav at fill end	Soil	Sandy	6'	12/6/12 1350 hrs	P. Shaw	
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

* = Depth Below the Surrounding Land Surface

XI. SAMPLING METHODOLOGY

Provide a detailed description of the methods used to collect and store the samples. Also include the preservative used for each sample. Please use the space provided below.

Sampling was performed in accordance with SC DHEC R.61-92 Part 280 and SC DHEC Assessment Guidelines. Sample containers were prepared by the testing laboratory. The grab method was utilized to fill the sample containers leaving as little head space as possible and immediately capped. Soil samples were extracted from area below tank. The samples were marked, logged, and immediately placed in a sample cooler packed with ice to maintain an approximate temperature of 4 degrees Centigrade. Tools were thoroughly cleaned and decontaminated with the seven step decon process after each use. The samples remained in custody of SBG-EEG, Inc. until they were transferred to Test America Incorporated for analysis as documented in the Chain of Custody Record.


XII. RECEPTORS

	Yes	No
A. Are there any lakes, ponds, streams, or wetlands located within 1000 feet of the UST system? If yes, indicate type of receptor, distance, and direction on site map.		X
B. Are there any public, private, or irrigation water supply wells within 1000 feet of the UST system? If yes, indicate type of well, distance, and direction on site map.		X
C. Are there any underground structures (e.g., basements) Located within 100 feet of the UST system? If yes, indicate type of structure, distance, and direction on site map.		X
D. Are there any underground utilities (e.g., telephone, electricity, gas, water, sewer, storm drain) located within 100 feet of the UST system that could potentially come in contact with the contamination? *Sewer, water, electricity, cable & fiber optic If yes, indicate the type of utility, distance, and direction on the site map.	*X	
E. Has contaminated soil been identified at a depth less than 3 feet below land surface in an area that is not capped by asphalt or concrete? If yes, indicate the area of contaminated soil on the site map.		X


XIII. SITE MAP

You must supply a scaled site map. It should include all buildings, road names, utilities, tank and dispenser island locations, labeled sample locations, extent of excavation, and any other pertinent information.

(Attach Site Map Here)

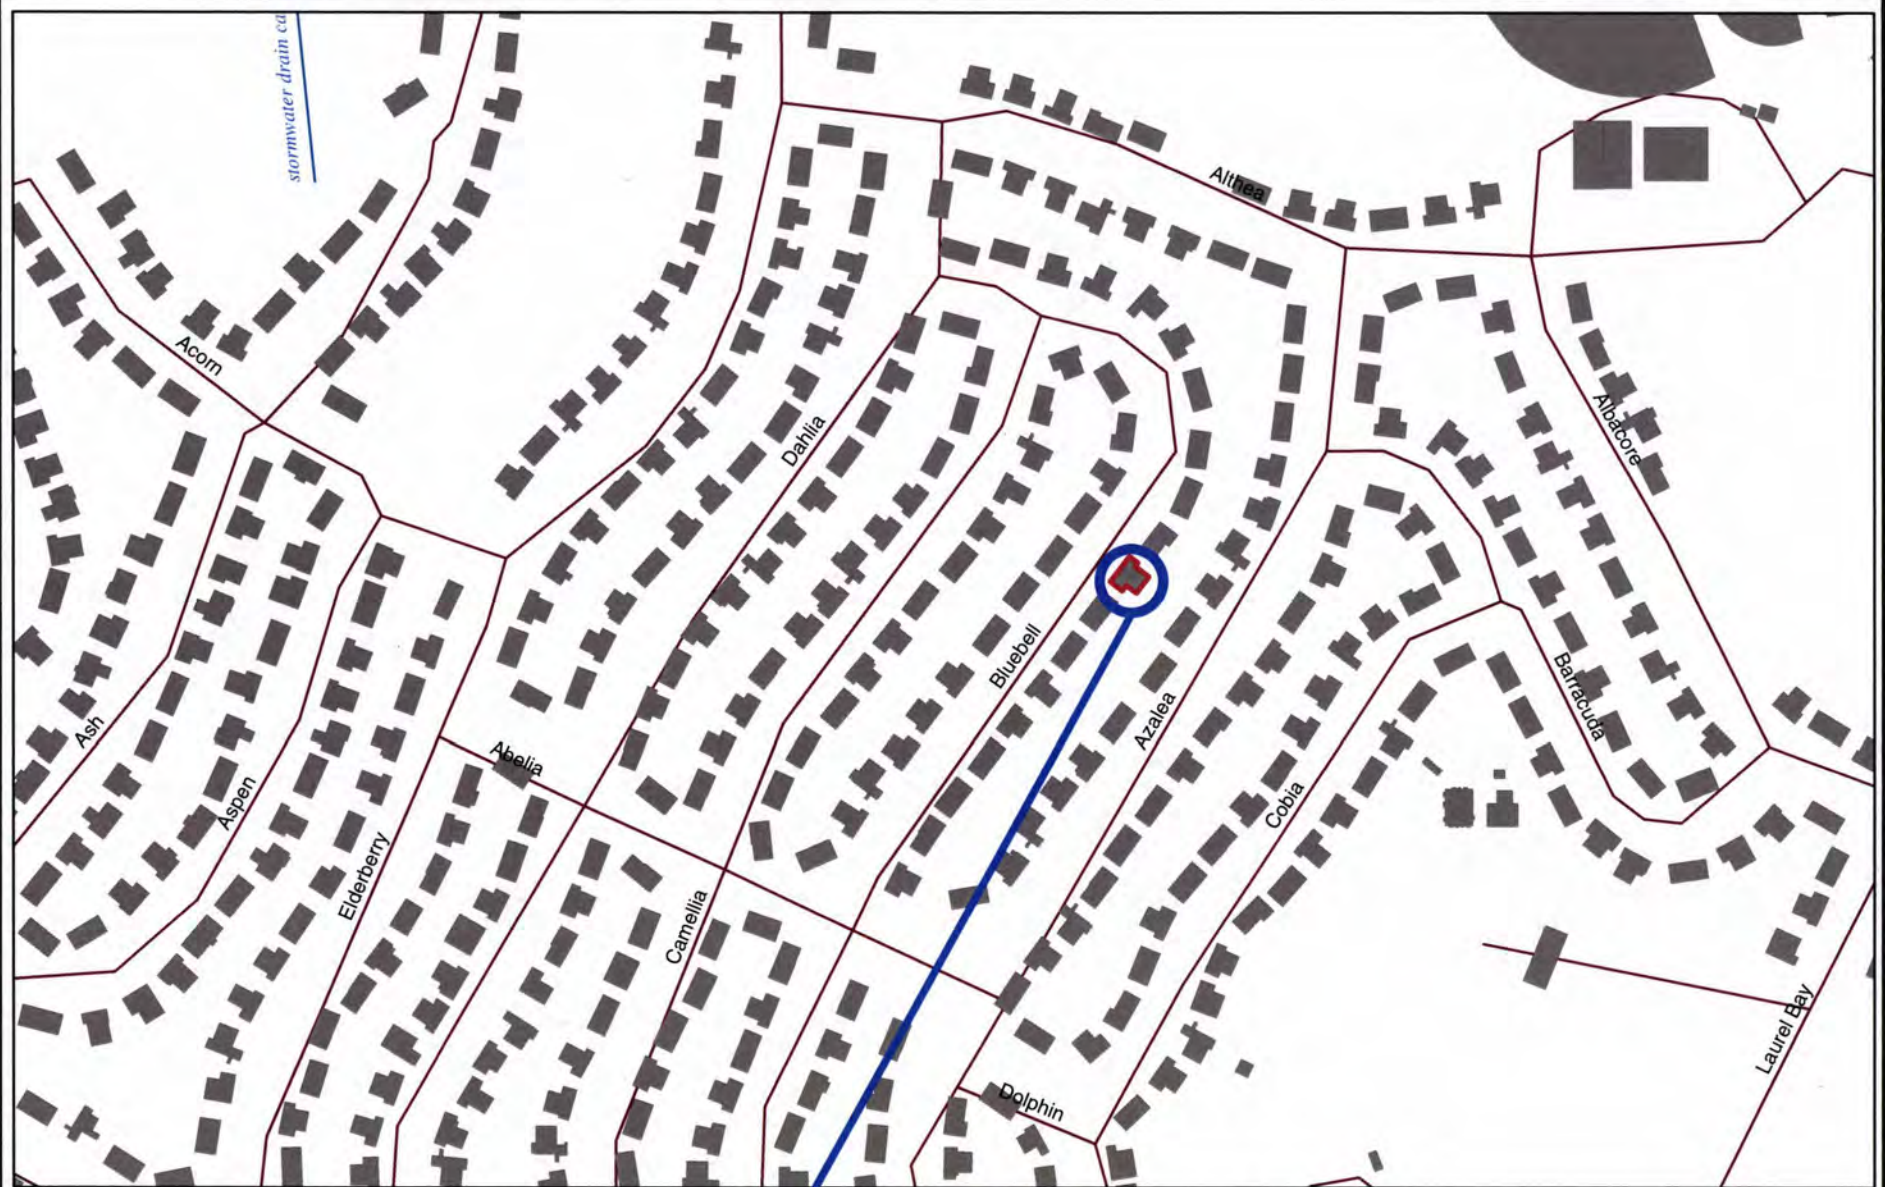

731 BLUEBELL



SBG-EEG, Inc.

7301 Rivers Ave., Suite 245
N. Charleston SC 29406-9643

Ph. (843) 573-7140


Drawn By: L. DiAsio

Dwg Date: Jan 2013

FIGURE 1: LOCATION MAP
731 BLUEBELL LANE
LAUREL BAY, BEAUFORT SC



731 BLUEBELL LN.
LAUREL BAY MILITARY HOUSING
MCAS BEAUFORT, SC



UST 731BLUEBELL

TANK DEPTH BELOW GRADE
731BLUEBELL = 36"



SBG-EEG

7301 RIVERS AVE., SUITE 245
N. CHARLESTON SC 29406-9643
(843) 573-7140

FIGURE 2 SITE MAP
731 BLUEBELL LN., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE JAN 2013

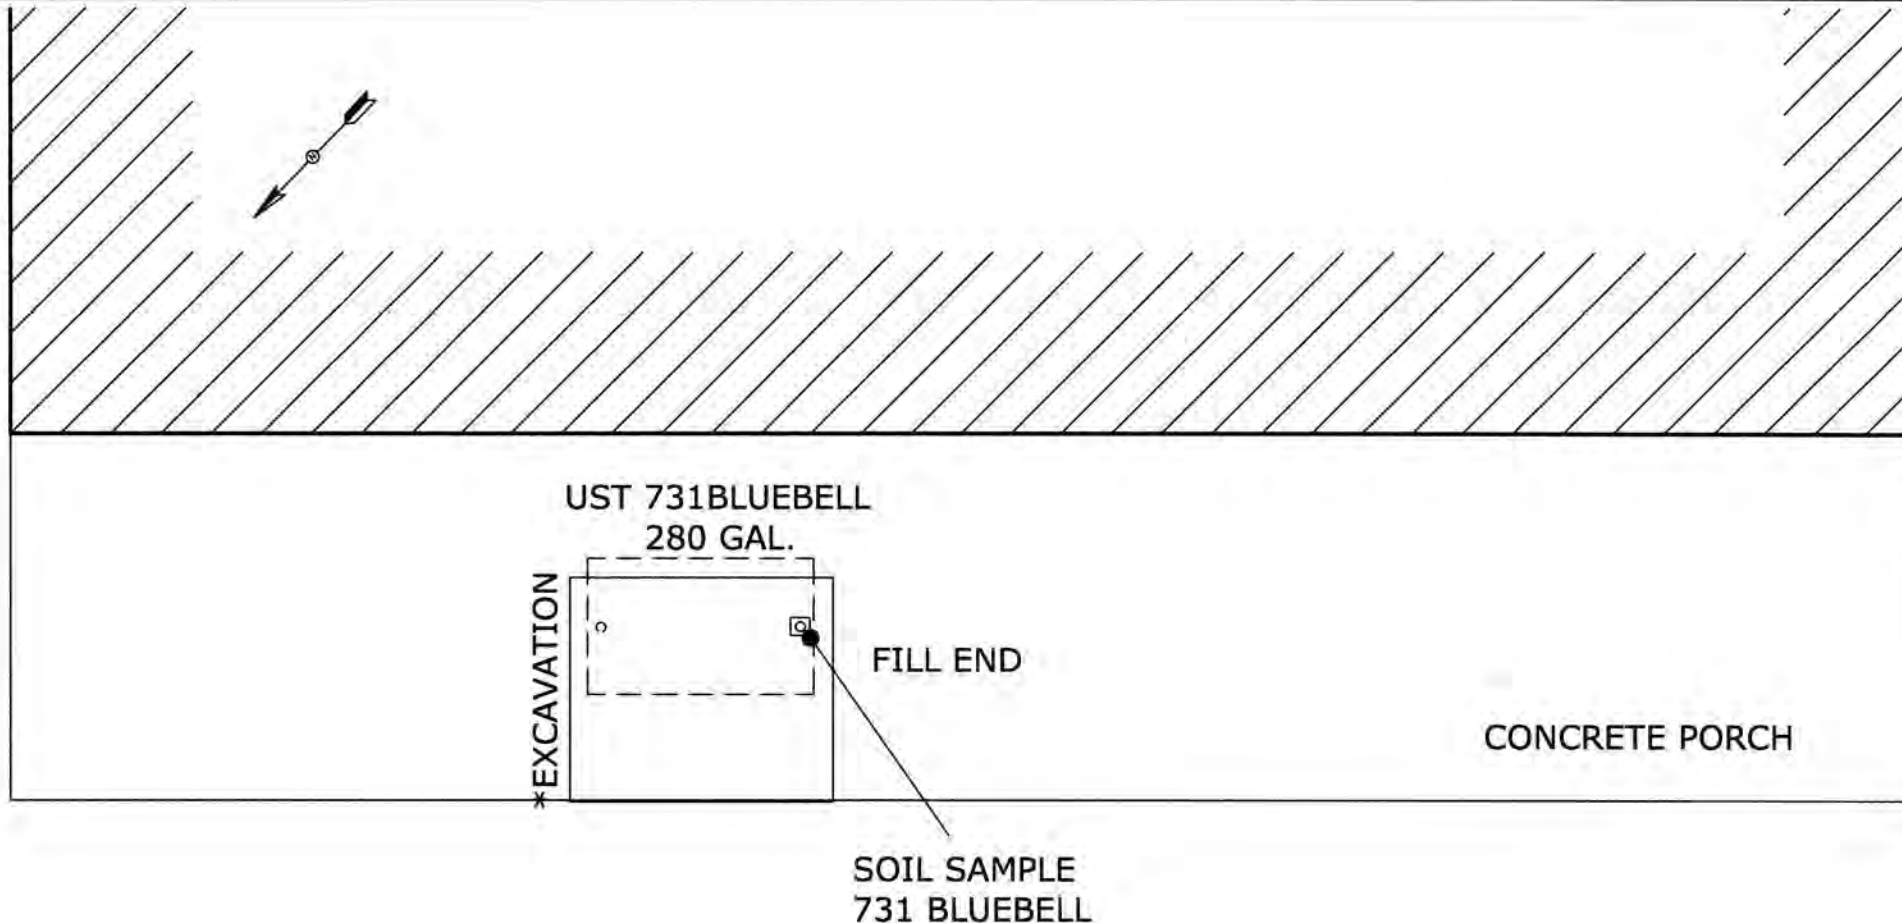

*A PORTION OF THE PORCH
WAS REMOVED TO FACILITATE
EXTRACTING THE TANK.

SBG-EEG

7301 RIVERS AVE., SUITE 245
N. CHARLESTON SC 29406-9643
(843) 573-7140

FIGURE 3 UST SAMPLE LOCATIONS
731 BLUEBELL LN., LAUREL BAY
MCAS BEAUFORT SC

SCALE: GRAPHIC

DWG DATE JAN 2013



Picture 1: Location of UST 731Bluebell.



Picture 2: UST 731Bluebell excavation.

XIV. SUMMARY OF ANALYSIS RESULTS

Enter the soil analytical data for each soil boring for all COC in the table below and on the following page.

CoC	UST	731Bluebell					
Benzene		ND					
Toluene		ND					
Ethylbenzene		ND					
Xylenes		ND					
Naphthalene		ND					
Benzo (a) anthracene		ND					
Benzo (b) fluoranthene		ND					
Benzo (k) fluoranthene		ND					
Chrysene		ND					
Dibenz (a, h) anthracene		ND					
TPH (EPA 3550)							

CoC							
Benzene							
Toluene							
Ethylbenzene							
Xylenes							
Naphthalene							
Benzo (a) anthracene							
Benzo (b) fluoranthene							
Benzo (k) fluoranthene							
Chrysene							
Dibenz (a, h) anthracene							
TPH (EPA 3550)							

SUMMARY OF ANALYSIS RESULTS (cont'd)

Enter the ground water analytical data for each sample for all CoC in the table below. If free product is present, indicate the measured thickness to the nearest 0.01 feet.

CoC	RBSL (µg/l)	W-1	W-2	W -3	W -4
Free Product Thickness	None				
Benzene	5				
Toluene	1,000				
Ethylbenzene	700				
Xylenes	10,000				
Total BTEX	N/A				
MTBE	40				
Naphthalene	25				
Benzo (a) anthracene	10				
Benzo (b) flouranthene	10				
Benzo (k) flouranthene	10				
Chrysene	10				
Dibenz (a, h) anthracene	10				
EDB	.05				
1,2-DCA	5				
Lead	Site specific				

XV. ANALYTICAL RESULTS

You must submit the laboratory report and chain-of-custody form for the samples. These samples must be analyzed by a South Carolina certified laboratory.

(Attach Certified Analytical Results and Chain-of-Custody Here)
(Please see Form #4)

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

ANALYTICAL REPORT

TestAmerica Laboratories, Inc.

TestAmerica Nashville
2960 Foster Creighton Drive
Nashville, TN 37204
Tel: (615)726-0177


TestAmerica Job ID: 490-14327-1

Client Project/Site: Laurel Bay Housing Project

For:

Environmental Enterprise Group
10179 Highway 78
Ladson, South Carolina 29456

Attn: Mr. Tom McElwee



Authorized for release by:
12/20/2012 10:53:39 AM

Ken Hayes
Project Manager I
ken.hayes@testamericainc.com

LINKS

Review your project
results through

TotalAccess

Have a Question?



Visit us at:

www.testamericainc.com

The test results in this report meet all 2003 NELAC and 2009 TNI requirements for accredited parameters, exceptions are noted in this report. This report may not be reproduced except in full, and with written approval from the laboratory. For questions please contact the Project Manager at the e-mail address or telephone number listed on this page.

This report has been electronically signed and authorized by the signatory. Electronic signature is intended to be the legally binding equivalent of a traditionally handwritten signature.

Results relate only to the items tested and the sample(s) as received by the laboratory.

Table of Contents

Cover Page	1
Table of Contents	2
Sample Summary	3
Case Narrative	4
Definitions	5
Client Sample Results	6
QC Sample Results	14
QC Association	20
Chronicle	22
Method Summary	24
Certification Summary	25
Chain of Custody	26
Receipt Checklists	29

Sample Summary

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Lab Sample ID	Client Sample ID	Matrix	Collected	Received
490-14327-1	1315 Albatross	Soil	12/03/12 15:15	12/12/12 08:00
490-14327-2	1338 Albatross	Soil	12/04/12 13:35	12/12/12 08:00
490-14327-3	705 Bluebell	Soil	12/05/12 13:45	12/12/12 08:00
490-14327-4	731 Bluebell	Soil	12/06/12 13:50	12/12/12 08:00
490-14327-5	693 Camellia	Soil	12/03/12 15:45	12/12/12 08:00
490-14327-6	1342 Albatross	Soil	12/04/12 14:30	12/12/12 08:00
490-14327-7	714 Bluebell	Soil	12/05/12 14:15	12/12/12 08:00
490-14327-8	726 Bluebell	Soil	12/06/12 14:00	12/12/12 08:00

Case Narrative

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Job ID: 490-14327-1

Laboratory: TestAmerica Nashville

Narrative

Job Narrative 490-14327-1

Comments

No additional comments.

Receipt

The samples were received on 12/12/2012 8:00 AM; the samples arrived in good condition, properly preserved and, where required, on ice. The temperature of the cooler at receipt was 5.8° C.

GC/MS VOA

Method(s) 8260B: The continuing calibration verification (CCV) for Toluene associated with batch 43876 recovered above the upper control limit. The samples associated with this CCV were non-detects for the affected analytes; therefore, the data have been reported.

Method(s) 8260B: Insufficient sample volume was available to perform a matrix spike/matrix spike duplicate (MS/MSD) associated with batch 43876.

Method(s) 8260B: Surrogate recovery for the following sample(s) was outside control limits: 693 Camellia (490-14327-5). Evidence of matrix interference is present; therefore, re-extraction and/or re-analysis was not performed.

Method(s) 8260B: Internal standard responses were outside of acceptance limits for the following sample(s): 693 Camellia (490-14327-5). The sample(s) shows evidence of matrix interference.

Method(s) 8260B: The matrix spike / matrix spike duplicate (MS/MSD) precision for batch 44506 was outside control limits. The associated laboratory control sample / laboratory control sample duplicate (LCS/LCSD) precision met acceptance criteria.

Method(s) 8260B: The following sample(s) was diluted due to the nature of the sample matrix: 693 Camellia (490-14327-5). Elevated reporting limits (RLs) are provided.

Method(s) 8260B: The following sample(s) required a dilution which was performed outside of the analytical holding time: 693 Camellia (490-14327-5).

No other analytical or quality issues were noted.

GC/MS Semi VOA

No analytical or quality issues were noted.

Organic Prep

No analytical or quality issues were noted.

VOA Prep

No analytical or quality issues were noted.

Definitions/Glossary

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Qualifiers

GC/MS VOA

Qualifier	Qualifier Description
X	Surrogate is outside control limits
H	Sample was prepped or analyzed beyond the specified holding time
J	Result is less than the RL but greater than or equal to the MDL and the concentration is an approximate value.
F	RPD of the MS and MSD exceeds the control limits

GC/MS Semi VOA

Qualifier	Qualifier Description
J	Result is less than the RL but greater than or equal to the MDL and the concentration is an approximate value.

Glossary

Abbreviation	These commonly used abbreviations may or may not be present in this report.
☼	Listed under the "D" column to designate that the result is reported on a dry weight basis
%R	Percent Recovery
CNF	Contains no Free Liquid
DER	Duplicate error ratio (normalized absolute difference)
DL, RA, RE, IN	Indicates a Dilution, Reanalysis, Re-extraction, or additional Initial metals/anion analysis of the sample
DLC	Decision level concentration
EDL	Estimated Detection Limit
EPA	United States Environmental Protection Agency
MDA	Minimum detectable activity
MDC	Minimum detectable concentration
MDL	Method Detection Limit
ML	Minimum Level (Dioxin)
ND	Not detected at the reporting limit (or MDL or EDL if shown)
PQL	Practical Quantitation Limit
QC	Quality Control
RER	Relative error ratio
RL	Reporting Limit or Requested Limit (Radiochemistry)
RPD	Relative Percent Difference, a measure of the relative difference between two points
TEF	Toxicity Equivalent Factor (Dioxin)
TEQ	Toxicity Equivalent Quotient (Dioxin)

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 1315 Albatross

Date Collected: 12/03/12 15:15

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-1

Matrix: Soil

Percent Solids: 94.7

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00233	0.000779	mg/Kg	☼	12/13/12 10:46	12/14/12 22:39	1
Ethylbenzene	ND		0.00233	0.000779	mg/Kg	☼	12/13/12 10:46	12/14/12 22:39	1
Naphthalene	ND		0.00582	0.00198	mg/Kg	☼	12/13/12 10:46	12/14/12 22:39	1
Toluene	ND		0.00233	0.000861	mg/Kg	☼	12/13/12 10:46	12/14/12 22:39	1
Xylenes, Total	ND		0.00582	0.000779	mg/Kg	☼	12/13/12 10:46	12/14/12 22:39	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	88		70 - 130	12/13/12 10:46	12/14/12 22:39	1
4-Bromofluorobenzene (Surr)	113		70 - 130	12/13/12 10:46	12/14/12 22:39	1
Dibromofluoromethane (Surr)	93		70 - 130	12/13/12 10:46	12/14/12 22:39	1
Toluene-d8 (Surr)	116		70 - 130	12/13/12 10:46	12/14/12 22:39	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0691	0.0103	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Acenaphthylene	ND		0.0691	0.00929	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Anthracene	0.0117	J	0.0691	0.00929	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Benzo[a]anthracene	0.172		0.0691	0.0155	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Benzo[a]pyrene	0.0480	J	0.0691	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Benzo[b]fluoranthene	0.128		0.0691	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Benzo[g,h,i]perylene	ND		0.0691	0.00929	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Benzo[k]fluoranthene	0.0770		0.0691	0.0144	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
1-Methylnaphthalene	ND		0.0691	0.0144	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Pyrene	0.557		0.0691	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Phenanthrene	0.0849		0.0691	0.00929	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Chrysene	0.145		0.0691	0.00929	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Dibenz(a,h)anthracene	ND		0.0691	0.00722	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Fluoranthene	0.620		0.0691	0.00929	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Fluorene	ND		0.0691	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Indeno[1,2,3-cd]pyrene	ND		0.0691	0.0103	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
Naphthalene	ND		0.0691	0.00929	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1
2-Methylnaphthalene	ND		0.0691	0.0165	mg/Kg	☼	12/13/12 11:42	12/14/12 16:34	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	75		29 - 120	12/13/12 11:42	12/14/12 16:34	1
Terphenyl-d14 (Surr)	93		13 - 120	12/13/12 11:42	12/14/12 16:34	1
Nitrobenzene-d5 (Surr)	62		27 - 120	12/13/12 11:42	12/14/12 16:34	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	95		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 1338 Albatross

Date Collected: 12/04/12 13:35

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-2

Matrix: Soil

Percent Solids: 89.6

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00256	0.000859	mg/Kg	☼	12/13/12 10:46	12/14/12 23:09	1
Ethylbenzene	ND		0.00256	0.000859	mg/Kg	☼	12/13/12 10:46	12/14/12 23:09	1
Naphthalene	ND		0.00641	0.00218	mg/Kg	☼	12/13/12 10:46	12/14/12 23:09	1
Toluene	ND		0.00256	0.000948	mg/Kg	☼	12/13/12 10:46	12/14/12 23:09	1
Xylenes, Total	ND		0.00641	0.000859	mg/Kg	☼	12/13/12 10:46	12/14/12 23:09	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	96		70 - 130	12/13/12 10:46	12/14/12 23:09	1
4-Bromofluorobenzene (Surr)	112		70 - 130	12/13/12 10:46	12/14/12 23:09	1
Dibromofluoromethane (Surr)	103		70 - 130	12/13/12 10:46	12/14/12 23:09	1
Toluene-d8 (Surr)	123		70 - 130	12/13/12 10:46	12/14/12 23:09	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0737	0.0110	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Acenaphthylene	ND		0.0737	0.00990	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Anthracene	ND		0.0737	0.00990	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Benzo[a]anthracene	0.0761		0.0737	0.0165	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Benzo[a]pyrene	ND		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Benzo[b]fluoranthene	0.132		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Benzo[g,h,i]perylene	ND		0.0737	0.00990	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Benzo[k]fluoranthene	0.0504	J	0.0737	0.0154	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
1-Methylnaphthalene	ND		0.0737	0.0154	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Pyrene	0.203		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Phenanthrene	ND		0.0737	0.00990	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Chrysene	0.120		0.0737	0.00990	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Dibenz(a,h)anthracene	ND		0.0737	0.00770	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Fluoranthene	0.215		0.0737	0.00990	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Fluorene	ND		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Indeno[1,2,3-cd]pyrene	ND		0.0737	0.0110	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
Naphthalene	ND		0.0737	0.00990	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1
2-Methylnaphthalene	ND		0.0737	0.0176	mg/Kg	☼	12/13/12 11:42	12/14/12 17:37	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	68		29 - 120	12/13/12 11:42	12/14/12 17:37	1
Terphenyl-d14 (Surr)	82		13 - 120	12/13/12 11:42	12/14/12 17:37	1
Nitrobenzene-d5 (Surr)	63		27 - 120	12/13/12 11:42	12/14/12 17:37	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	90		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 705 Bluebell

Lab Sample ID: 490-14327-3

Date Collected: 12/05/12 13:45

Matrix: Soil

Date Received: 12/12/12 08:00

Percent Solids: 88.6

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00260	0.000871	mg/Kg	☼	12/13/12 10:46	12/14/12 23:39	1
Ethylbenzene	ND		0.00260	0.000871	mg/Kg	☼	12/13/12 10:46	12/14/12 23:39	1
Naphthalene	ND		0.00650	0.00221	mg/Kg	☼	12/13/12 10:46	12/14/12 23:39	1
Toluene	ND		0.00260	0.000961	mg/Kg	☼	12/13/12 10:46	12/14/12 23:39	1
Xylenes, Total	ND		0.00650	0.000871	mg/Kg	☼	12/13/12 10:46	12/14/12 23:39	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	98		70 - 130	12/13/12 10:46	12/14/12 23:39	1
4-Bromofluorobenzene (Surr)	110		70 - 130	12/13/12 10:46	12/14/12 23:39	1
Dibromofluoromethane (Surr)	104		70 - 130	12/13/12 10:46	12/14/12 23:39	1
Toluene-d8 (Surr)	115		70 - 130	12/13/12 10:46	12/14/12 23:39	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0744	0.0111	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Acenaphthylene	ND		0.0744	0.00999	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Anthracene	ND		0.0744	0.00999	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Benzo[a]anthracene	ND		0.0744	0.0166	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Benzo[a]pyrene	ND		0.0744	0.0133	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Benzo[b]fluoranthene	ND		0.0744	0.0133	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Benzo[g,h,i]perylene	ND		0.0744	0.00999	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Benzo[k]fluoranthene	ND		0.0744	0.0155	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
1-Methylnaphthalene	ND		0.0744	0.0155	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Pyrene	ND		0.0744	0.0133	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Phenanthrene	ND		0.0744	0.00999	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Chrysene	ND		0.0744	0.00999	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Dibenz(a,h)anthracene	ND		0.0744	0.00777	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Fluoranthene	ND		0.0744	0.00999	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Fluorene	ND		0.0744	0.0133	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Indeno[1,2,3-cd]pyrene	ND		0.0744	0.0111	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
Naphthalene	ND		0.0744	0.00999	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1
2-Methylnaphthalene	ND		0.0744	0.0178	mg/Kg	☼	12/13/12 11:42	12/14/12 17:58	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	67		29 - 120	12/13/12 11:42	12/14/12 17:58	1
Terphenyl-d14 (Surr)	87		13 - 120	12/13/12 11:42	12/14/12 17:58	1
Nitrobenzene-d5 (Surr)	62		27 - 120	12/13/12 11:42	12/14/12 17:58	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	89		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 731 Bluebell

Date Collected: 12/06/12 13:50

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-4

Matrix: Soil

Percent Solids: 96.0

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00232	0.000779	mg/Kg	☼	12/13/12 10:46	12/15/12 00:09	1
Ethylbenzene	ND		0.00232	0.000779	mg/Kg	☼	12/13/12 10:46	12/15/12 00:09	1
Naphthalene	ND		0.00581	0.00198	mg/Kg	☼	12/13/12 10:46	12/15/12 00:09	1
Toluene	ND		0.00232	0.000860	mg/Kg	☼	12/13/12 10:46	12/15/12 00:09	1
Xylenes, Total	ND		0.00581	0.000779	mg/Kg	☼	12/13/12 10:46	12/15/12 00:09	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	99		70 - 130	12/13/12 10:46	12/15/12 00:09	1
4-Bromofluorobenzene (Surr)	114		70 - 130	12/13/12 10:46	12/15/12 00:09	1
Dibromofluoromethane (Surr)	103		70 - 130	12/13/12 10:46	12/15/12 00:09	1
Toluene-d8 (Surr)	117		70 - 130	12/13/12 10:46	12/15/12 00:09	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0693	0.0103	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Acenaphthylene	ND		0.0693	0.00931	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Anthracene	ND		0.0693	0.00931	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Benzo[a]anthracene	ND		0.0693	0.0155	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Benzo[a]pyrene	ND		0.0693	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Benzo[b]fluoranthene	ND		0.0693	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Benzo[g,h,i]perylene	ND		0.0693	0.00931	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Benzo[k]fluoranthene	ND		0.0693	0.0145	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
1-Methylnaphthalene	ND		0.0693	0.0145	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Pyrene	ND		0.0693	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Phenanthrene	ND		0.0693	0.00931	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Chrysene	ND		0.0693	0.00931	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Dibenz(a,h)anthracene	ND		0.0693	0.00724	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Fluoranthene	ND		0.0693	0.00931	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Fluorene	ND		0.0693	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Indeno[1,2,3-cd]pyrene	ND		0.0693	0.0103	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
Naphthalene	ND		0.0693	0.00931	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1
2-Methylnaphthalene	ND		0.0693	0.0165	mg/Kg	☼	12/13/12 11:42	12/14/12 18:19	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	66		29 - 120	12/13/12 11:42	12/14/12 18:19	1
Terphenyl-d14 (Surr)	83		13 - 120	12/13/12 11:42	12/14/12 18:19	1
Nitrobenzene-d5 (Surr)	55		27 - 120	12/13/12 11:42	12/14/12 18:19	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	96		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 693 Camellia

Date Collected: 12/03/12 15:45

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-5

Matrix: Soil

Percent Solids: 90.4

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00250	0.000838	mg/Kg	☼	12/13/12 10:46	12/15/12 00:39	1
Ethylbenzene	ND		0.00250	0.000838	mg/Kg	☼	12/13/12 10:46	12/15/12 00:39	1
Naphthalene	ND	H	0.340	0.115	mg/Kg	☼	12/13/12 10:44	12/18/12 13:12	1
Toluene	ND		0.00250	0.000925	mg/Kg	☼	12/13/12 10:46	12/15/12 00:39	1
Xylenes, Total	ND		0.00625	0.000838	mg/Kg	☼	12/13/12 10:46	12/15/12 00:39	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	95		70 - 130	12/13/12 10:46	12/15/12 00:39	1
1,2-Dichloroethane-d4 (Surr)	80		70 - 130	12/13/12 10:44	12/18/12 13:12	1
4-Bromofluorobenzene (Surr)	151	X	70 - 130	12/13/12 10:46	12/15/12 00:39	1
4-Bromofluorobenzene (Surr)	109		70 - 130	12/13/12 10:44	12/18/12 13:12	1
Dibromofluoromethane (Surr)	103		70 - 130	12/13/12 10:46	12/15/12 00:39	1
Dibromofluoromethane (Surr)	94		70 - 130	12/13/12 10:44	12/18/12 13:12	1
Toluene-d8 (Surr)	132	X	70 - 130	12/13/12 10:46	12/15/12 00:39	1
Toluene-d8 (Surr)	118		70 - 130	12/13/12 10:44	12/18/12 13:12	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0724	0.0108	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Acenaphthylene	ND		0.0724	0.00973	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Anthracene	ND		0.0724	0.00973	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Benzo[a]anthracene	0.0686	J	0.0724	0.0162	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Benzo[a]pyrene	0.164		0.0724	0.0130	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Benzo[b]fluoranthene	0.123		0.0724	0.0130	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Benzo[g,h,i]perylene	0.0592	J	0.0724	0.00973	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Benzo[k]fluoranthene	0.0309	J	0.0724	0.0151	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
1-Methylnaphthalene	ND		0.0724	0.0151	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Pyrene	ND		0.0724	0.0130	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Phenanthrene	ND		0.0724	0.00973	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Chrysene	ND		0.0724	0.00973	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Dibenz(a,h)anthracene	ND		0.0724	0.00757	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Fluoranthene	ND		0.0724	0.00973	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Fluorene	ND		0.0724	0.0130	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Indeno[1,2,3-cd]pyrene	0.0599	J	0.0724	0.0108	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
Naphthalene	ND		0.0724	0.00973	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1
2-Methylnaphthalene	ND		0.0724	0.0173	mg/Kg	☼	12/13/12 11:42	12/14/12 18:40	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	72		29 - 120	12/13/12 11:42	12/14/12 18:40	1
Terphenyl-d14 (Surr)	71		13 - 120	12/13/12 11:42	12/14/12 18:40	1
Nitrobenzene-d5 (Surr)	63		27 - 120	12/13/12 11:42	12/14/12 18:40	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	90		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 1342 Albatross

Lab Sample ID: 490-14327-6

Date Collected: 12/04/12 14:30

Matrix: Soil

Date Received: 12/12/12 08:00

Percent Solids: 89.1

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00245	0.000820	mg/Kg	☼	12/13/12 10:46	12/15/12 01:09	1
Ethylbenzene	ND		0.00245	0.000820	mg/Kg	☼	12/13/12 10:46	12/15/12 01:09	1
Naphthalene	ND		0.00612	0.00208	mg/Kg	☼	12/13/12 10:46	12/15/12 01:09	1
Toluene	ND		0.00245	0.000906	mg/Kg	☼	12/13/12 10:46	12/15/12 01:09	1
Xylenes, Total	ND		0.00612	0.000820	mg/Kg	☼	12/13/12 10:46	12/15/12 01:09	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	92		70 - 130	12/13/12 10:46	12/15/12 01:09	1
4-Bromofluorobenzene (Surr)	108		70 - 130	12/13/12 10:46	12/15/12 01:09	1
Dibromofluoromethane (Surr)	101		70 - 130	12/13/12 10:46	12/15/12 01:09	1
Toluene-d8 (Surr)	122		70 - 130	12/13/12 10:46	12/15/12 01:09	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0737	0.0110	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Acenaphthylene	ND		0.0737	0.00991	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Anthracene	ND		0.0737	0.00991	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Benzo[a]anthracene	ND		0.0737	0.0165	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Benzo[a]pyrene	ND		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Benzo[b]fluoranthene	ND		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Benzo[g,h,i]perylene	ND		0.0737	0.00991	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Benzo[k]fluoranthene	ND		0.0737	0.0154	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
1-Methylnaphthalene	ND		0.0737	0.0154	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Pyrene	ND		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Phenanthrene	ND		0.0737	0.00991	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Chrysene	ND		0.0737	0.00991	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Dibenz(a,h)anthracene	ND		0.0737	0.00770	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Fluoranthene	ND		0.0737	0.00991	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Fluorene	ND		0.0737	0.0132	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Indeno[1,2,3-cd]pyrene	ND		0.0737	0.0110	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
Naphthalene	ND		0.0737	0.00991	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1
2-Methylnaphthalene	ND		0.0737	0.0176	mg/Kg	☼	12/13/12 11:42	12/14/12 19:01	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	63		29 - 120	12/13/12 11:42	12/14/12 19:01	1
Terphenyl-d14 (Surr)	80		13 - 120	12/13/12 11:42	12/14/12 19:01	1
Nitrobenzene-d5 (Surr)	56		27 - 120	12/13/12 11:42	12/14/12 19:01	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	89		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 714 Bluebell

Lab Sample ID: 490-14327-7

Date Collected: 12/05/12 14:15

Matrix: Soil

Date Received: 12/12/12 08:00

Percent Solids: 96.1

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00210	0.000704	mg/Kg	☼	12/13/12 10:46	12/15/12 01:40	1
Ethylbenzene	ND		0.00210	0.000704	mg/Kg	☼	12/13/12 10:46	12/15/12 01:40	1
Naphthalene	ND		0.00525	0.00179	mg/Kg	☼	12/13/12 10:46	12/15/12 01:40	1
Toluene	ND		0.00210	0.000778	mg/Kg	☼	12/13/12 10:46	12/15/12 01:40	1
Xylenes, Total	ND		0.00525	0.000704	mg/Kg	☼	12/13/12 10:46	12/15/12 01:40	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	97		70 - 130	12/13/12 10:46	12/15/12 01:40	1
4-Bromofluorobenzene (Surr)	109		70 - 130	12/13/12 10:46	12/15/12 01:40	1
Dibromofluoromethane (Surr)	103		70 - 130	12/13/12 10:46	12/15/12 01:40	1
Toluene-d8 (Surr)	113		70 - 130	12/13/12 10:46	12/15/12 01:40	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0694	0.0104	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Acenaphthylene	ND		0.0694	0.00932	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Anthracene	ND		0.0694	0.00932	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Benzo[a]anthracene	0.474		0.0694	0.0155	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Benzo[a]pyrene	0.100		0.0694	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Benzo[b]fluoranthene	0.323		0.0694	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Benzo[g,h,i]perylene	0.0408	J	0.0694	0.00932	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Benzo[k]fluoranthene	0.128		0.0694	0.0145	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
1-Methylnaphthalene	ND		0.0694	0.0145	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Pyrene	1.40		0.0694	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Phenanthrene	0.160		0.0694	0.00932	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Chrysene	0.383		0.0694	0.00932	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Dibenz(a,h)anthracene	ND		0.0694	0.00725	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Fluoranthene	1.83		0.0694	0.00932	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Fluorene	ND		0.0694	0.0124	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Indeno[1,2,3-cd]pyrene	0.0448	J	0.0694	0.0104	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
Naphthalene	ND		0.0694	0.00932	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1
2-Methylnaphthalene	ND		0.0694	0.0166	mg/Kg	☼	12/13/12 11:42	12/14/12 19:22	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	75		29 - 120	12/13/12 11:42	12/14/12 19:22	1
Terphenyl-d14 (Surr)	88		13 - 120	12/13/12 11:42	12/14/12 19:22	1
Nitrobenzene-d5 (Surr)	60		27 - 120	12/13/12 11:42	12/14/12 19:22	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	96		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

Client Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 726 Bluebell

Date Collected: 12/06/12 14:00

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-8

Matrix: Soil

Percent Solids: 90.9

Method: 8260B - Volatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00232	0.000777	mg/Kg	☼	12/13/12 10:46	12/15/12 02:10	1
Ethylbenzene	ND		0.00232	0.000777	mg/Kg	☼	12/13/12 10:46	12/15/12 02:10	1
Naphthalene	ND		0.00580	0.00197	mg/Kg	☼	12/13/12 10:46	12/15/12 02:10	1
Toluene	ND		0.00232	0.000858	mg/Kg	☼	12/13/12 10:46	12/15/12 02:10	1
Xylenes, Total	ND		0.00580	0.000777	mg/Kg	☼	12/13/12 10:46	12/15/12 02:10	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	96		70 - 130	12/13/12 10:46	12/15/12 02:10	1
4-Bromofluorobenzene (Surr)	111		70 - 130	12/13/12 10:46	12/15/12 02:10	1
Dibromofluoromethane (Surr)	102		70 - 130	12/13/12 10:46	12/15/12 02:10	1
Toluene-d8 (Surr)	120		70 - 130	12/13/12 10:46	12/15/12 02:10	1

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Analyte	Result	Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0723	0.0108	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Acenaphthylene	ND		0.0723	0.00971	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Anthracene	ND		0.0723	0.00971	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Benzo[a]anthracene	ND		0.0723	0.0162	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Benzo[a]pyrene	ND		0.0723	0.0129	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Benzo[b]fluoranthene	ND		0.0723	0.0129	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Benzo[g,h,i]perylene	ND		0.0723	0.00971	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Benzo[k]fluoranthene	ND		0.0723	0.0151	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
1-Methylnaphthalene	ND		0.0723	0.0151	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Pyrene	ND		0.0723	0.0129	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Phenanthrene	ND		0.0723	0.00971	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Chrysene	ND		0.0723	0.00971	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Dibenz(a,h)anthracene	ND		0.0723	0.00755	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Fluoranthene	ND		0.0723	0.00971	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Fluorene	ND		0.0723	0.0129	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Indeno[1,2,3-cd]pyrene	ND		0.0723	0.0108	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
Naphthalene	ND		0.0723	0.00971	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1
2-Methylnaphthalene	ND		0.0723	0.0173	mg/Kg	☼	12/13/12 11:42	12/14/12 19:43	1

Surrogate	%Recovery	Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	68		29 - 120	12/13/12 11:42	12/14/12 19:43	1
Terphenyl-d14 (Surr)	84		13 - 120	12/13/12 11:42	12/14/12 19:43	1
Nitrobenzene-d5 (Surr)	60		27 - 120	12/13/12 11:42	12/14/12 19:43	1

General Chemistry

Analyte	Result	Qualifier	RL	RL	Unit	D	Prepared	Analyzed	Dil Fac
Percent Solids	91		0.10	0.10	%			12/13/12 10:21	1

TestAmerica Nashville

QC Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Method: 8260B - Volatile Organic Compounds (GC/MS)

Lab Sample ID: 490-14487-B-4-B MS

Matrix: Solid

Analysis Batch: 44506

Client Sample ID: Matrix Spike

Prep Type: Total/NA

Prep Batch: 43805

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec. Limits
Benzene	0.00313		0.0435	0.03655		mg/Kg		77	31 - 143
Ethylbenzene	0.00139	J	0.0435	0.03038		mg/Kg		67	23 - 161
Naphthalene	ND		0.0435	0.02210		mg/Kg		51	10 - 176
Toluene	0.00820		0.0435	0.04025		mg/Kg		74	30 - 155
Xylenes, Total	0.00353	J	0.130	0.09091		mg/Kg		68	25 - 162

Surrogate	MS %Recovery	MS Qualifier	Limits
1,2-Dichloroethane-d4 (Surr)	95		70 - 130
4-Bromofluorobenzene (Surr)	103		70 - 130
Dibromofluoromethane (Surr)	109		70 - 130
Toluene-d8 (Surr)	107		70 - 130

Lab Sample ID: 490-14487-C-4-C MSD

Matrix: Solid

Analysis Batch: 44506

Client Sample ID: Matrix Spike Duplicate

Prep Type: Total/NA

Prep Batch: 43805

Analyte	Sample Result	Sample Qualifier	Spike Added	MSD Result	MSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	RPD Limit
Benzene	0.00313		0.0414	0.04653		mg/Kg		105	31 - 143	24	50
Ethylbenzene	0.00139	J	0.0414	0.04591		mg/Kg		108	23 - 161	41	50
Naphthalene	ND		0.0414	0.03795	F	mg/Kg		92	10 - 176	53	50
Toluene	0.00820		0.0414	0.05951		mg/Kg		124	30 - 155	39	50
Xylenes, Total	0.00353	J	0.124	0.1380		mg/Kg		109	25 - 162	41	50

Surrogate	MSD %Recovery	MSD Qualifier	Limits
1,2-Dichloroethane-d4 (Surr)	96		70 - 130
4-Bromofluorobenzene (Surr)	102		70 - 130
Dibromofluoromethane (Surr)	107		70 - 130
Toluene-d8 (Surr)	115		70 - 130

Lab Sample ID: MB 490-43876/6

Matrix: Solid

Analysis Batch: 43876

Client Sample ID: Method Blank

Prep Type: Total/NA

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.00200	0.000670	mg/Kg			12/14/12 21:08	1
Ethylbenzene	ND		0.00200	0.000670	mg/Kg			12/14/12 21:08	1
Naphthalene	ND		0.00500	0.00170	mg/Kg			12/14/12 21:08	1
Toluene	ND		0.00200	0.000740	mg/Kg			12/14/12 21:08	1
Xylenes, Total	ND		0.00500	0.000670	mg/Kg			12/14/12 21:08	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	82		70 - 130		12/14/12 21:08	1
4-Bromofluorobenzene (Surr)	109		70 - 130		12/14/12 21:08	1
Dibromofluoromethane (Surr)	101		70 - 130		12/14/12 21:08	1
Toluene-d8 (Surr)	116		70 - 130		12/14/12 21:08	1

TestAmerica Nashville

QC Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Method: 8260B - Volatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: LCS 490-43876/3

Matrix: Solid

Analysis Batch: 43876

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec. Limits
Benzene	0.0500	0.05592		mg/Kg		112	75 - 127
Ethylbenzene	0.0500	0.05321		mg/Kg		106	80 - 134
Naphthalene	0.0500	0.04878		mg/Kg		98	69 - 150
Toluene	0.0500	0.06526		mg/Kg		131	80 - 132
Xylenes, Total	0.150	0.1610		mg/Kg		107	80 - 137

Surrogate	%Recovery	LCS Qualifier	Limits
1,2-Dichloroethane-d4 (Surr)	95		70 - 130
4-Bromofluorobenzene (Surr)	98		70 - 130
Dibromofluoromethane (Surr)	107		70 - 130
Toluene-d8 (Surr)	116		70 - 130

Lab Sample ID: LCSD 490-43876/4

Matrix: Solid

Analysis Batch: 43876

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	Limit
Benzene	0.0500	0.05434		mg/Kg		109	75 - 127	3	50
Ethylbenzene	0.0500	0.05277		mg/Kg		106	80 - 134	1	50
Naphthalene	0.0500	0.04783		mg/Kg		96	69 - 150	2	50
Toluene	0.0500	0.06302		mg/Kg		126	80 - 132	4	50
Xylenes, Total	0.150	0.1592		mg/Kg		106	80 - 137	1	50

Surrogate	%Recovery	LCSD Qualifier	Limits
1,2-Dichloroethane-d4 (Surr)	92		70 - 130
4-Bromofluorobenzene (Surr)	98		70 - 130
Dibromofluoromethane (Surr)	107		70 - 130
Toluene-d8 (Surr)	117		70 - 130

Lab Sample ID: MB 490-44506/7

Matrix: Solid

Analysis Batch: 44506

Client Sample ID: Method Blank

Prep Type: Total/NA

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Benzene	ND		0.100	0.0340	mg/Kg			12/18/12 09:11	1
Ethylbenzene	ND		0.100	0.0340	mg/Kg			12/18/12 09:11	1
Naphthalene	ND		0.250	0.0850	mg/Kg			12/18/12 09:11	1
Toluene	ND		0.100	0.0370	mg/Kg			12/18/12 09:11	1
Xylenes, Total	ND		0.250	0.0340	mg/Kg			12/18/12 09:11	1

Surrogate	%Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	78		70 - 130		12/18/12 09:11	1
4-Bromofluorobenzene (Surr)	108		70 - 130		12/18/12 09:11	1
Dibromofluoromethane (Surr)	96		70 - 130		12/18/12 09:11	1
Toluene-d8 (Surr)	125		70 - 130		12/18/12 09:11	1

TestAmerica Nashville

QC Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Method: 8260B - Volatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: LCS 490-44506/3

Matrix: Solid

Analysis Batch: 44506

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec. Limits
Benzene	0.0500	0.04848		mg/Kg		97	75 - 127
Ethylbenzene	0.0500	0.04587		mg/Kg		92	80 - 134
Naphthalene	0.0500	0.04605		mg/Kg		92	69 - 150
Toluene	0.0500	0.05808		mg/Kg		116	80 - 132
Xylenes, Total	0.150	0.1372		mg/Kg		91	80 - 137

Surrogate	LCS %Recovery	LCS Qualifier	Limits
1,2-Dichloroethane-d4 (Surr)	90		70 - 130
4-Bromofluorobenzene (Surr)	95		70 - 130
Dibromofluoromethane (Surr)	108		70 - 130
Toluene-d8 (Surr)	117		70 - 130

Lab Sample ID: LCSD 490-44506/4

Matrix: Solid

Analysis Batch: 44506

Client Sample ID: Lab Control Sample Dup

Prep Type: Total/NA

Analyte	Spike Added	LCSD Result	LCSD Qualifier	Unit	D	%Rec	%Rec. Limits	RPD	RPD Limit
Benzene	0.0500	0.05073		mg/Kg		101	75 - 127	5	50
Ethylbenzene	0.0500	0.05046		mg/Kg		101	80 - 134	10	50
Naphthalene	0.0500	0.04755		mg/Kg		95	69 - 150	3	50
Toluene	0.0500	0.06231		mg/Kg		125	80 - 132	7	50
Xylenes, Total	0.150	0.1555		mg/Kg		104	80 - 137	12	50

Surrogate	LCSD %Recovery	LCSD Qualifier	Limits
1,2-Dichloroethane-d4 (Surr)	93		70 - 130
4-Bromofluorobenzene (Surr)	95		70 - 130
Dibromofluoromethane (Surr)	106		70 - 130
Toluene-d8 (Surr)	116		70 - 130

Method: 8270D - Semivolatile Organic Compounds (GC/MS)

Lab Sample ID: MB 490-43519/1-A

Matrix: Solid

Analysis Batch: 43942

Client Sample ID: Method Blank

Prep Type: Total/NA

Prep Batch: 43519

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Acenaphthene	ND		0.0670	0.0100	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Acenaphthylene	ND		0.0670	0.00900	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Anthracene	ND		0.0670	0.00900	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Benzo[a]anthracene	ND		0.0670	0.0150	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Benzo[a]pyrene	ND		0.0670	0.0120	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Benzo[b]fluoranthene	ND		0.0670	0.0120	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Benzo[g,h,i]perylene	ND		0.0670	0.00900	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Benzo[k]fluoranthene	ND		0.0670	0.0140	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
1-Methylnaphthalene	ND		0.0670	0.0140	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Pyrene	ND		0.0670	0.0120	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Phenanthrene	ND		0.0670	0.00900	mg/Kg		12/13/12 11:42	12/14/12 15:51	1

TestAmerica Nashville

QC Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Method: 8270D - Semivolatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: MB 490-43519/1-A

Matrix: Solid

Analysis Batch: 43942

Client Sample ID: Method Blank

Prep Type: Total/NA

Prep Batch: 43519

Analyte	MB Result	MB Qualifier	RL	MDL	Unit	D	Prepared	Analyzed	Dil Fac
Chrysene	ND		0.0670	0.00900	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Dibenz(a,h)anthracene	ND		0.0670	0.00700	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Fluoranthene	ND		0.0670	0.00900	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Fluorene	ND		0.0670	0.0120	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Indeno[1,2,3-cd]pyrene	ND		0.0670	0.0100	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
Naphthalene	ND		0.0670	0.00900	mg/Kg		12/13/12 11:42	12/14/12 15:51	1
2-Methylnaphthalene	ND		0.0670	0.0160	mg/Kg		12/13/12 11:42	12/14/12 15:51	1

Surrogate	MB %Recovery	MB Qualifier	Limits	Prepared	Analyzed	Dil Fac
2-Fluorobiphenyl (Surr)	65		29 - 120	12/13/12 11:42	12/14/12 15:51	1
Terphenyl-d14 (Surr)	84		13 - 120	12/13/12 11:42	12/14/12 15:51	1
Nitrobenzene-d5 (Surr)	58		27 - 120	12/13/12 11:42	12/14/12 15:51	1

Lab Sample ID: LCS 490-43519/2-A

Matrix: Solid

Analysis Batch: 43942

Client Sample ID: Lab Control Sample

Prep Type: Total/NA

Prep Batch: 43519

Analyte	Spike Added	LCS Result	LCS Qualifier	Unit	D	%Rec	%Rec. Limits
Acenaphthylene	1.67	1.413		mg/Kg		85	38 - 120
Anthracene	1.67	1.373		mg/Kg		82	46 - 124
Benzo[a]anthracene	1.67	1.400		mg/Kg		84	45 - 120
Benzo[a]pyrene	1.67	1.448		mg/Kg		87	45 - 120
Benzo[b]fluoranthene	1.67	1.370		mg/Kg		82	42 - 120
Benzo[g,h,i]perylene	1.67	1.462		mg/Kg		88	38 - 120
Benzo[k]fluoranthene	1.67	1.537		mg/Kg		92	42 - 120
1-Methylnaphthalene	1.67	1.316		mg/Kg		79	32 - 120
Pyrene	1.67	1.434		mg/Kg		86	43 - 120
Phenanthrene	1.67	1.456		mg/Kg		87	45 - 120
Chrysene	1.67	1.383		mg/Kg		83	43 - 120
Dibenz(a,h)anthracene	1.67	1.449		mg/Kg		87	32 - 128
Fluoranthene	1.67	1.413		mg/Kg		85	46 - 120
Fluorene	1.67	1.398		mg/Kg		84	42 - 120
Indeno[1,2,3-cd]pyrene	1.67	1.448		mg/Kg		87	41 - 121
Naphthalene	1.67	1.333		mg/Kg		80	32 - 120
2-Methylnaphthalene	1.67	1.344		mg/Kg		81	28 - 120

Surrogate	LCS %Recovery	LCS Qualifier	Limits
2-Fluorobiphenyl (Surr)	73		29 - 120
Terphenyl-d14 (Surr)	97		13 - 120
Nitrobenzene-d5 (Surr)	63		27 - 120

Lab Sample ID: 490-14327-1 MS

Matrix: Soil

Analysis Batch: 43942

Client Sample ID: 1315 Albatross

Prep Type: Total/NA

Prep Batch: 43519

Analyte	Sample Result	Sample Qualifier	Spike Added	MS Result	MS Qualifier	Unit	D	%Rec	%Rec. Limits
Acenaphthylene	ND		1.71	1.552		mg/Kg	⚙	91	25 - 120
Anthracene	0.0117	J	1.71	1.550		mg/Kg	⚙	90	28 - 125

TestAmerica Nashville

QC Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Method: 8270D - Semivolatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: 490-14327-1 MS

Matrix: Soil

Analysis Batch: 43942

Client Sample ID: 1315 Albatross

Prep Type: Total/NA

Prep Batch: 43519

Analyte	Sample	Sample	Spike	MS	MS	Unit	D	%Rec	%Rec.
	Result	Qualifier	Added	Result	Qualifier				Limits
Benzo[a]anthracene	0.172		1.71	1.898		mg/Kg	☼	101	23 - 120
Benzo[a]pyrene	0.0480	J	1.71	1.647		mg/Kg	☼	94	15 - 128
Benzo[b]fluoranthene	0.128		1.71	1.903		mg/Kg	☼	104	12 - 133
Benzo[g,h,i]perylene	ND		1.71	1.613		mg/Kg	☼	95	22 - 120
Benzo[k]fluoranthene	0.0770		1.71	1.596		mg/Kg	☼	89	28 - 120
1-Methylnaphthalene	ND		1.71	1.400		mg/Kg	☼	82	10 - 120
Pyrene	0.557		1.71	2.265		mg/Kg	☼	100	20 - 123
Phenanthrene	0.0849		1.71	1.732		mg/Kg	☼	97	21 - 122
Chrysene	0.145		1.71	1.859		mg/Kg	☼	100	20 - 120
Dibenz(a,h)anthracene	ND		1.71	1.618		mg/Kg	☼	95	12 - 128
Fluoranthene	0.620		1.71	2.394		mg/Kg	☼	104	10 - 143
Fluorene	ND		1.71	1.524		mg/Kg	☼	89	20 - 120
Indeno[1,2,3-cd]pyrene	ND		1.71	1.633		mg/Kg	☼	96	22 - 121
Naphthalene	ND		1.71	1.432		mg/Kg	☼	84	10 - 120
2-Methylnaphthalene	ND		1.71	1.446		mg/Kg	☼	85	13 - 120

Surrogate	MS	MS	Limits
	%Recovery	Qualifier	
2-Fluorobiphenyl (Surr)	73		29 - 120
Terphenyl-d14 (Surr)	88		13 - 120
Nitrobenzene-d5 (Surr)	59		27 - 120

Lab Sample ID: 490-14327-1 MSD

Matrix: Soil

Analysis Batch: 43942

Client Sample ID: 1315 Albatross

Prep Type: Total/NA

Prep Batch: 43519

Analyte	Sample	Sample	Spike	MSD	MSD	Unit	D	%Rec	%Rec.	RPD	
	Result	Qualifier	Added	Result	Qualifier				Limits	RPD	Limit
Acenaphthylene	ND		1.73	1.511		mg/Kg	☼	87	25 - 120	3	50
Anthracene	0.0117	J	1.73	1.546		mg/Kg	☼	89	28 - 125	0	49
Benzo[a]anthracene	0.172		1.73	1.658		mg/Kg	☼	86	23 - 120	14	50
Benzo[a]pyrene	0.0480	J	1.73	1.598		mg/Kg	☼	90	15 - 128	3	50
Benzo[b]fluoranthene	0.128		1.73	1.744		mg/Kg	☼	93	12 - 133	9	50
Benzo[g,h,i]perylene	ND		1.73	1.584		mg/Kg	☼	92	22 - 120	2	50
Benzo[k]fluoranthene	0.0770		1.73	1.473		mg/Kg	☼	81	28 - 120	8	45
1-Methylnaphthalene	ND		1.73	1.469		mg/Kg	☼	85	10 - 120	5	50
Pyrene	0.557		1.73	1.820		mg/Kg	☼	73	20 - 123	22	50
Phenanthrene	0.0849		1.73	1.658		mg/Kg	☼	91	21 - 122	4	50
Chrysene	0.145		1.73	1.616		mg/Kg	☼	85	20 - 120	14	49
Dibenz(a,h)anthracene	ND		1.73	1.587		mg/Kg	☼	92	12 - 128	2	50
Fluoranthene	0.620		1.73	1.908		mg/Kg	☼	74	10 - 143	23	50
Fluorene	ND		1.73	1.517		mg/Kg	☼	88	20 - 120	0	50
Indeno[1,2,3-cd]pyrene	ND		1.73	1.598		mg/Kg	☼	92	22 - 121	2	50
Naphthalene	ND		1.73	1.492		mg/Kg	☼	86	10 - 120	4	50
2-Methylnaphthalene	ND		1.73	1.492		mg/Kg	☼	86	13 - 120	3	50

Surrogate	MSD	MSD	Limits
	%Recovery	Qualifier	
2-Fluorobiphenyl (Surr)	71		29 - 120
Terphenyl-d14 (Surr)	89		13 - 120

TestAmerica Nashville

QC Sample Results

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Method: 8270D - Semivolatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: 490-14327-1 MSD

Matrix: Soil

Analysis Batch: 43942

Client Sample ID: 1315 Albatross

Prep Type: Total/NA

Prep Batch: 43519

Surrogate	MSD	MSD	Limits
	%Recovery	Qualifier	
Nitrobenzene-d5 (Surr)	62		27 - 120

Method: Moisture - Percent Moisture

Lab Sample ID: 490-14327-1 DU

Matrix: Soil

Analysis Batch: 43438

Client Sample ID: 1315 Albatross

Prep Type: Total/NA

Analyte	Sample	Sample	DU	DU	Unit	D	RPD	RPD	Limit
	Result	Qualifier	Result	Qualifier				Limit	
Percent Solids	95		95		%		0.3	20	

TestAmerica Nashville

QC Association Summary

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

GC/MS VOA

Prep Batch: 43459

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-5	693 Camellia	Total/NA	Soil	5035	

Prep Batch: 43461

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-1	1315 Albatross	Total/NA	Soil	5035	
490-14327-2	1338 Albatross	Total/NA	Soil	5035	
490-14327-3	705 Bluebell	Total/NA	Soil	5035	
490-14327-4	731 Bluebell	Total/NA	Soil	5035	
490-14327-5	693 Camellia	Total/NA	Soil	5035	
490-14327-6	1342 Albatross	Total/NA	Soil	5035	
490-14327-7	714 Bluebell	Total/NA	Soil	5035	
490-14327-8	726 Bluebell	Total/NA	Soil	5035	

Prep Batch: 43805

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14487-B-4-B MS	Matrix Spike	Total/NA	Solid	5035	
490-14487-C-4-C MSD	Matrix Spike Duplicate	Total/NA	Solid	5035	

Analysis Batch: 43876

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-1	1315 Albatross	Total/NA	Soil	8260B	43461
490-14327-2	1338 Albatross	Total/NA	Soil	8260B	43461
490-14327-3	705 Bluebell	Total/NA	Soil	8260B	43461
490-14327-4	731 Bluebell	Total/NA	Soil	8260B	43461
490-14327-5	693 Camellia	Total/NA	Soil	8260B	43461
490-14327-6	1342 Albatross	Total/NA	Soil	8260B	43461
490-14327-7	714 Bluebell	Total/NA	Soil	8260B	43461
490-14327-8	726 Bluebell	Total/NA	Soil	8260B	43461
LCS 490-43876/3	Lab Control Sample	Total/NA	Solid	8260B	
LCSD 490-43876/4	Lab Control Sample Dup	Total/NA	Solid	8260B	
MB 490-43876/6	Method Blank	Total/NA	Solid	8260B	

Analysis Batch: 44506

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-5	693 Camellia	Total/NA	Soil	8260B	43459
490-14487-B-4-B MS	Matrix Spike	Total/NA	Solid	8260B	43805
490-14487-C-4-C MSD	Matrix Spike Duplicate	Total/NA	Solid	8260B	43805
LCS 490-44506/3	Lab Control Sample	Total/NA	Solid	8260B	
LCSD 490-44506/4	Lab Control Sample Dup	Total/NA	Solid	8260B	
MB 490-44506/7	Method Blank	Total/NA	Solid	8260B	

GC/MS Semi VOA

Prep Batch: 43519

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-1	1315 Albatross	Total/NA	Soil	3550C	
490-14327-1 MS	1315 Albatross	Total/NA	Soil	3550C	
490-14327-1 MSD	1315 Albatross	Total/NA	Soil	3550C	
490-14327-2	1338 Albatross	Total/NA	Soil	3550C	
490-14327-3	705 Bluebell	Total/NA	Soil	3550C	

TestAmerica Nashville

QC Association Summary

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

GC/MS Semi VOA (Continued)

Prep Batch: 43519 (Continued)

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-4	731 Bluebell	Total/NA	Soil	3550C	
490-14327-5	693 Camellia	Total/NA	Soil	3550C	
490-14327-6	1342 Albatross	Total/NA	Soil	3550C	
490-14327-7	714 Bluebell	Total/NA	Soil	3550C	
490-14327-8	726 Bluebell	Total/NA	Soil	3550C	
LCS 490-43519/2-A	Lab Control Sample	Total/NA	Solid	3550C	
MB 490-43519/1-A	Method Blank	Total/NA	Solid	3550C	

Analysis Batch: 43942

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-1	1315 Albatross	Total/NA	Soil	8270D	43519
490-14327-1 MS	1315 Albatross	Total/NA	Soil	8270D	43519
490-14327-1 MSD	1315 Albatross	Total/NA	Soil	8270D	43519
490-14327-2	1338 Albatross	Total/NA	Soil	8270D	43519
490-14327-3	705 Bluebell	Total/NA	Soil	8270D	43519
490-14327-4	731 Bluebell	Total/NA	Soil	8270D	43519
490-14327-5	693 Camellia	Total/NA	Soil	8270D	43519
490-14327-6	1342 Albatross	Total/NA	Soil	8270D	43519
490-14327-7	714 Bluebell	Total/NA	Soil	8270D	43519
490-14327-8	726 Bluebell	Total/NA	Soil	8270D	43519
LCS 490-43519/2-A	Lab Control Sample	Total/NA	Solid	8270D	43519
MB 490-43519/1-A	Method Blank	Total/NA	Solid	8270D	43519

General Chemistry

Analysis Batch: 43438

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
490-14327-1	1315 Albatross	Total/NA	Soil	Moisture	
490-14327-1 DU	1315 Albatross	Total/NA	Soil	Moisture	
490-14327-2	1338 Albatross	Total/NA	Soil	Moisture	
490-14327-3	705 Bluebell	Total/NA	Soil	Moisture	
490-14327-4	731 Bluebell	Total/NA	Soil	Moisture	
490-14327-5	693 Camellia	Total/NA	Soil	Moisture	
490-14327-6	1342 Albatross	Total/NA	Soil	Moisture	
490-14327-7	714 Bluebell	Total/NA	Soil	Moisture	
490-14327-8	726 Bluebell	Total/NA	Soil	Moisture	

Lab Chronicle

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 1315 Albatross

Date Collected: 12/03/12 15:15

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-1

Matrix: Soil

Percent Solids: 94.7

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/14/12 22:39	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 16:34	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

Client Sample ID: 1338 Albatross

Date Collected: 12/04/12 13:35

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-2

Matrix: Soil

Percent Solids: 89.6

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/14/12 23:09	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 17:37	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

Client Sample ID: 705 Bluebell

Date Collected: 12/05/12 13:45

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-3

Matrix: Soil

Percent Solids: 88.6

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/14/12 23:39	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 17:58	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

Client Sample ID: 731 Bluebell

Date Collected: 12/06/12 13:50

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-4

Matrix: Soil

Percent Solids: 96.0

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/15/12 00:09	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 18:19	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

TestAmerica Nashville

Lab Chronicle

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Client Sample ID: 693 Camellia

Date Collected: 12/03/12 15:45

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-5

Matrix: Soil
Percent Solids: 90.4

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/15/12 00:39	AF	TAL NSH
Total/NA	Prep	5035			43459	12/13/12 10:44	ML	TAL NSH
Total/NA	Analysis	8260B		1	44506	12/18/12 13:12	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 18:40	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

Client Sample ID: 1342 Albatross

Date Collected: 12/04/12 14:30

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-6

Matrix: Soil
Percent Solids: 89.1

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/15/12 01:09	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 19:01	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

Client Sample ID: 714 Bluebell

Date Collected: 12/05/12 14:15

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-7

Matrix: Soil
Percent Solids: 96.1

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/15/12 01:40	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 19:22	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

Client Sample ID: 726 Bluebell

Date Collected: 12/06/12 14:00

Date Received: 12/12/12 08:00

Lab Sample ID: 490-14327-8

Matrix: Soil
Percent Solids: 90.9

Prep Type	Batch Type	Batch Method	Run	Dilution Factor	Batch Number	Prepared or Analyzed	Analyst	Lab
Total/NA	Prep	5035			43461	12/13/12 10:46	ML	TAL NSH
Total/NA	Analysis	8260B		1	43876	12/15/12 02:10	AF	TAL NSH
Total/NA	Prep	3550C			43519	12/13/12 11:42	AK	TAL NSH
Total/NA	Analysis	8270D		1	43942	12/14/12 19:43	WS	TAL NSH
Total/NA	Analysis	Moisture		1	43438	12/13/12 10:21	RS	TAL NSH

Laboratory References:

TAL NSH = TestAmerica Nashville, 2960 Foster Creighton Drive, Nashville, TN 37204, TEL (615)726-0177

TestAmerica Nashville

Method Summary

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Method	Method Description	Protocol	Laboratory
8260B	Volatile Organic Compounds (GC/MS)	SW846	TAL NSH
8270D	Semivolatile Organic Compounds (GC/MS)	SW846	TAL NSH
Moisture	Percent Moisture	EPA	TAL NSH

Protocol References:

EPA = US Environmental Protection Agency

SW846 = "Test Methods For Evaluating Solid Waste, Physical/Chemical Methods", Third Edition, November 1986 And Its Updates.

Laboratory References:

TAL NSH = TestAmerica Nashville, 2960 Foster Creighton Drive, Nashville, TN 37204, TEL (615)726-0177

Certification Summary

Client: Environmental Enterprise Group
Project/Site: Laurel Bay Housing Project

TestAmerica Job ID: 490-14327-1

Laboratory: TestAmerica Nashville

All certifications held by this laboratory are listed. Not all certifications are applicable to this report.

Authority	Program	EPA Region	Certification ID	Expiration Date
	ACIL		393	10-30-13
A2LA	ISO/IEC 17025		0453.07	12-31-13
Alabama	State Program	4	41150	05-31-13
Alaska (UST)	State Program	10	UST-087	07-24-13
Arizona	State Program	9	AZ0473	05-05-13
Arkansas DEQ	State Program	6	88-0737	04-25-13
California	NELAC	9	1168CA	10-31-13
Canadian Assoc Lab Accred (CALA)	Canada		3744	03-08-14
Colorado	State Program	8	N/A	02-28-13
Connecticut	State Program	1	PH-0220	12-31-13
Florida	NELAC	4	E87358	06-30-13
Illinois	NELAC	5	200010	12-09-13
Iowa	State Program	7	131	05-01-14
Kansas	NELAC	7	E-10229	10-31-13
Kentucky	State Program	4	90038	12-31-12
Kentucky (UST)	State Program	4	19	09-15-13
Louisiana	NELAC	6	LA120025	12-31-12
Louisiana	NELAC	6	30613	06-30-13
Maryland	State Program	3	316	03-31-13
Massachusetts	State Program	1	M-TN032	06-30-13
Minnesota	NELAC	5	047-999-345	12-31-12
Mississippi	State Program	4	N/A	06-30-13
Montana (UST)	State Program	8	NA	01-01-15
Nevada	State Program	9	TN00032	07-31-13
New Hampshire	NELAC	1	2963	10-09-13
New Jersey	NELAC	2	TN965	06-30-13
New York	NELAC	2	11342	04-01-13
North Carolina DENR	State Program	4	387	12-31-12
North Dakota	State Program	8	R-146	06-30-13
Ohio VAP	State Program	5	CL0033	01-19-14
Oklahoma	State Program	6	9412	08-31-13
Oregon	NELAC	10	TN200001	04-30-13
Pennsylvania	NELAC	3	68-00585	06-30-13
Rhode Island	State Program	1	LAO00268	12-30-12
South Carolina	State Program	4	84009 (001)	02-28-13
South Carolina	State Program	4	84009 (002)	02-23-14
Tennessee	State Program	4	2008	02-23-14
Texas	NELAC	6	T104704077-09-TX	08-31-13
USDA	Federal		S-48469	11-02-13
Utah	NELAC	8	TAN	06-30-13
Virginia	NELAC	3	460152	06-14-13
Washington	State Program	10	C789	07-19-13
West Virginia DEP	State Program	3	219	02-28-13
Wisconsin	State Program	5	998020430	08-31-13
Wyoming (UST)	A2LA	8	453.07	12-31-13

COOLER RECEIPT FORM

Charleston



490-14327 Chain of Custody

Cooler Received/Opened On 12/12/2012 @ 0800

1. Tracking # 6106 (last 4 digits, FedEx)

Courier: Fedex IR Gun ID 14740456

2. Temperature of rep. sample or temp blank when opened: 5.8 Degrees Celsius

3. If Item #2 temperature is 0°C or less, was the representative sample or temp blank frozen? YES NO...NA

4. Were custody seals on outside of cooler? YES...NO...NA

If yes, how many and where: 2 Front/Back

5. Were the seals intact, signed, and dated correctly? YES...NO...NA

6. Were custody papers inside cooler? YES...NO...NA

I certify that I opened the cooler and answered questions 1-6 (Initial) EF

7. Were custody seals on containers: YES NO and Intact YES...NO...NA

Were these signed and dated correctly? YES...NO...NA

8. Packing mat'l used? Bubblewrap Plastic bag Peanuts Vermiculite Foam Insert Paper Other None

9. Cooling process: Ice Ice-pack Ice (direct contact) Dry ice Other None

10. Did all containers arrive in good condition (unbroken)? YES...NO...NA

11. Were all container labels complete (#, date, signed, pres., etc)? YES...NO...NA

12. Did all container labels and tags agree with custody papers? YES...NO...NA

13a. Were VOA vials received? YES...NO...NA

b. Was there any observable headspace present in any VOA vial? YES...NO...NA

14. Was there a Trip Blank in this cooler? YES...NO...NA If multiple coolers, sequence # 1

I certify that I unloaded the cooler and answered questions 7-14 (Initial) EW

15a. On pres'd bottles, did pH test strips suggest preservation reached the correct pH level? YES...NO...NA

b. Did the bottle labels indicate that the correct preservatives were used YES...NO...NA

16. Was residual chlorine present? YES...NO...NA

I certify that I checked for chlorine and pH as per SOP and answered questions 15-16 (Initial) EW

17. Were custody papers properly filled out (ink, signed, etc)? YES...NO...NA

18. Did you sign the custody papers in the appropriate place? YES...NO...NA

19. Were correct containers used for the analysis requested? YES...NO...NA

20. Was sufficient amount of sample sent in each container? YES...NO...NA

I certify that I entered this project into LIMS and answered questions 17-20 (Initial) EW

I certify that I attached a label with the unique LIMS number to each container (Initial) EW

21. Were there Non-Conformance issues at login? YES...NO Was a NCM generated? YES...NO..#

TestAmerica

Nashville Division
2980 Foster Creighton
Nashville, TN 37204

Phone: 615-728-0177
Toll Free: 800-785-0860
Fax: 615-728-2446

Client Name/Account #: EEG - SBG # 2449

Address: 10179 Highway 78

City/State/Zip: Ladson, SC 29456

Project Manager: Tom McElwee email: mcelwee@eeginc.net

Telephone Number: 843.412.2087

Sampler Name: (Print)

Sampler Signature:

Fax No.: 843-879-0401

Site State: SC

PO#: 1063

TA Quote #:

Project ID: Laurel Bay Housing Project

Project #:

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?

Compliance Monitoring?
Enforcement Action?

Yes ☐ No ☐
Yes ☐ No ☐

Loc: 490
14327

Sample ID / Description	Date Sampled	Time Sampled	No. of Containers Shipped	Grab	Composite	Field Filtered	Ice	HNO ₃ (Red Label)	HCL (Blue Label)	MeOH (Orange Label)	H ₂ SO ₄ Plastic (Yellow Label)	H ₂ SO ₄ Glass (Yellow Label)	None (Black Label)	Other (Specify)	Groundwater	Wastewater	Drinking Water	Sludge	Soil	Other (specify):	BTEX + Napth - 8280	PAH - 8270D	Analyze For:	RUSH TAT (Pre-Schedule)	
1315 H/D4/10055	12/3/12	1515	5	X																				-1	
1338 Albath055	12/4/12	1335	5	X																					2
705 Blueh21	12/5/12	1345	5	X																					3
731 Blueh21	12/6/12	1350	5	X																					4

Special Instructions:

Method of Shipment:

FEDEX

Laboratory Comments:

Temperature Upon Receipt: 58C
VOCs Free of Headspace?

Relinquished by:

Date:

Relinquished by:

Date:

Time:

Received by:

Time:

Date:

Time:

Date:

Time:

TestAmerica

THE LEADER IN ENVIRONMENTAL TESTING

Nashville Division
2960 Foster Creighton
Nashville, TN 37204

Phone: 615-726-0177
Toll Free: 800-765-0980
Fax: 615-726-3404

Client Name/Account #: EEG - SBG # 2449

Address: 10179 Highway 78

City/State/Zip: Ladson, SC 29456

Project Manager: Tom McElwee email: mcelwee@seajinc.net

Telephone Number: 843.412.2093

Fax No.: 843-879-0401

Sampler Name: (Print)

Sampler Signature:

Site State: SC

PO#: 1063

TA Quote #:

Project ID: Laurel Bay Housing Project

Project #:

To assist us in using the proper analytical methods, is this work being conducted for regulatory purposes?

Compliance Monitoring? Yes ☐ No ☐
Enforcement Action? Yes ☐ No ☐

Sample ID / Description	Date Sampled	Time Sampled	No. of Containers Shipped	Grab	Composite	Field Filtered	Ice	HNO ₃ (Red Label)	H ₂ SO ₄ Plastic (Yellow Label)	H ₂ SO ₄ Glass (Yellow Label)	None (Black Label)	Other (Specify)	Groundwater	Wastewater	Drinking Water	Sludge	Soil	Other (specify):	BTEX + Napth - 8260B	PAH - 8270D	Analyze For:	RUSH TAT (Pre-Schedule)	
693 Camellia	12/3/12	1545	5	X																X	X		5
1342 Albarkoss	12/4/12	1430	5	X																X	X		4
714 Bluebell	12/5/12	1415	5	X																X	X		7
726 Bluebell	12/6/12	1400	5	X																X	X		8
Special Instructions:																							
Laboratory Comments:																							

Special Instructions:

Method of Shipment:

FEDEX

Laboratory Comments:

Temperature Upon Receipt: 58c
VOCs Free of Headspace?

Relinquished by:	Date	Time	Received by:	Date	Time
<i>[Signature]</i>	12/11/10	0900	<i>[Signature]</i>	12-11-12	0830
Relinquished by:	Date	Time	Received by:	Date	Time

13-20-12

Loc: 490
14327
#1
A

Login Sample Receipt Checklist

Client: Environmental Enterprise Group

Job Number: 490-14327-1

Login Number: 14327

List Source: TestAmerica Nashville

List Number: 1

Creator: McBride, Mike

Question	Answer	Comment
Radioactivity wasn't checked or is $\leq$ background as measured by a survey meter.	True	
The cooler's custody seal, if present, is intact.	N/A	
Sample custody seals, if present, are intact.	N/A	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	True	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time.	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	N/A	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is $<6\text{mm}$ (1/4").	True	
Multiphasic samples are not present.	True	
Samples do not require splitting or compositing.	True	
Residual Chlorine Checked.	N/A	

ATTACHMENT A



NON-HAZARDOUS MANIFEST

NON-HAZARDOUS MANIFEST		1. Generator's US EPA ID No.		Manifest Doc No.		2. Page 1 of 1					
3. Generator's Mailing Address: MCAS BEAUFORT LAUREL BAY HOUSING BEAUFORT, SC 29904				Generator's Site Address (if different than mailing):		A. Manifest Number WMNA 01519108					
4. Generator's Phone 843-879-0411						B. State Generator's ID					
5. Transporter 1 Company Name				6. US EPA ID Number		C. State Transporter's ID					
						D. Transporter's Phone					
7. Transporter 2 Company Name				8. US EPA ID Number		E. State Transporter's ID					
						F. Transporter's Phone					
9. Designated Facility Name and Site Address HICKORY HILL LANDFILL 2621 LOW COUNTRY DRIVE RIDGELAND, SC 29936				10. US EPA ID Number		G. State Facility ID					
						H. State Facility Phone 843-987-4643					
GENERATOR	11. Description of Waste Materials				12. Containers		13. Total Quantity	14. Unit Wt./Vol.	I. Misc. Comments		
	a. HEATING OIL TANK FILLED WITH SAND				No.	Type					
	WM Profile # 102655SC										
	b.										
	WM Profile #										
TRANSPORTER	c.										
	WM Profile #										
	d.										
	WM Profile #										
FACILITY	J. Additional Descriptions for Materials Listed Above				K. Disposal Location						
					Cell		Level				
					Grid						
15. Special Handling Instructions and Additional Information											
UST's from: 1) 6777 CAMERON HILL 4) 1200 CARDINAL 6) 686 CAMEL HILL D 731 BLUEBELL 3) 815 AZALEA 5) 1304 EAGLE											
Purchase Order #				EMERGENCY CONTACT / PHONE NO.:							
16. GENERATOR'S CERTIFICATE: I hereby certify that the above-described materials are not hazardous wastes as defined by 40 CFR Part 261 or any applicable state law, have been fully and accurately described, classified and packaged and are in proper condition for transportation according to applicable regulations.											
Printed Name				Signature "On behalf of"				Month	Day	Year	
								2	4	13	
TRANSPORTER	17. Transporter 1 Acknowledgement of Receipt of Materials										
	Printed Name				Signature				Month	Day	Year
	PRAH SHAW				[Signature]				2	4	13
FACILITY	18. Transporter 2 Acknowledgement of Receipt of Materials										
	Printed Name				Signature				Month	Day	Year
	JAMES BALDWIN				James Baldwin				2	5	13
19. Certificate of Final Treatment/Disposal I certify, on behalf of the above listed treatment facility, that to the best of my knowledge, the above-described waste was managed in compliance with all applicable laws, regulations, permits and licenses on the dates listed above.											
20. Facility Owner or Operator: Certification of receipt of non-hazardous materials covered by this manifest.											
Printed Name				Signature				Month	Day	Year	
TONI COFIELD				Toni Cofield				2	5	13	

White- TREATMENT, STORAGE, DISPOSAL FACILITY COPY

Blue- GENERATOR #2 COPY


Yellow- GENERATOR #1 COPY

Pink- FACILITY USE ONLY

Gold- TRANSPORTER #1 COPY

Appendix C

Regulatory Correspondence



Catherine B. Templeton, Director

Promoting and protecting the health of the public and the environment

May 15, 2014

Commanding Officer
Attention: NREAO Mr. William A. Drawdy
United State Marine Corps Air Station
Post Office Box 55001
Beaufort, SC 29904-5001

RE: No Further Action
Laurel Bay Underground Storage Tank Assessment Reports for:
See attached sheet

Dear Mr. Drawdy,

The South Carolina Department of Health and Environmental Control (the Department) received the above referenced Underground Storage Tanks (USTs) Assessment Reports for the addresses listed above. The regulatory authority for the investigation and cleanup of releases from these tank systems is the South Carolina Pollution Control Act (S.C. Code Ann. §48-1-10 et seq., as amended).

The Department has reviewed the referenced assessment reports and agrees there is no indication of soil or groundwater contamination on these properties, and therefore no further investigation is required at this time.

Please note that the Department's decision is based on information provided by the Marine Corps Air Station (MCAS) to date. Any information found to be contradictory to this decision may require additional action. Furthermore, the Department retains the right to request further investigation if deemed necessary.

If you have any questions, please contact me at kriegkm@dhec.sc.gov or 803-898-0255.

Sincerely,

Kent Krieg
Department of Defense Corrective Action Section
Bureau of Land and Waste Management
South Carolina Department of Health and Environmental Control

Cc: Russell Berry (via email)
Craig Ehde (via email)



Catherine B. Templeton, Director

Promoting and protecting the health of the public and the environment

Attachment to: Krieg to Drawdy
Subject: NFA
Dated 5/15/2014

Laurel Bay Underground Storage Tank Assessment Reports for: (143 addresses/146 tanks)

212 Balsam	503 Laurel Bay
219 Balsam	508 Laurel Bay
260 Beech Tank 1	510 Laurel Bay
260 Beech Tank 2	523 Laurel Bay
267 Birch	525 Laurel Bay
287 Birch	529 Laurel Bay
302 Ash	533 Laurel Bay
305 Ash	537 Laurel Bay
334 Ash	556 Dahlia
338 Ash Tank 1	557 Dahlia
338 Ash Tank 2	559 Dahlia
361 Aspen	562 Dahlia
371 Aspen	568 Dahlia
372 Aspen Tank 1	581 Aster
372 Aspen Tank 2	582 Aster
375 Aspen	584 Aster
385 Aspen	602 Dahlia
403 Elderberry	607 Dahlia
407 Elderberry	614 Dahlia
411 Elderberry	616 Dahlia
414 Elderberry	619 Dahlia
415 Elderberry	625 Dahlia
421 Elderberry	629 Dahlia
427 Elderberry	631 Dahlia
428 Elderberry	634 Dahlia
431 Elderberry	660 Camellia
455 Elderberry	661 Camellia
484 Laurel Bay	666 Camellia
490 Laurel Bay	669 Camellia
502 Laurel Bay	672 Camellia

Laurel Bay Underground Storage Tank Assessment Reports for: (143 addresses/146 tanks) cont.

674 Camellia	880 Cobia
677 Camellia	890 Cobia
679 Camellia	892 Cobia
686 Camellia	900 Barracuda
690 Camellia	906 Barracuda
698 Abelia	911 Barracuda
700 Bluebell	912 Barracuda
704 Bluebell	917 Barracuda
705 Bluebell	919 Barracuda
708 Bluebell	928 Albacore
710 Bluebell	1024 Foxglove
711 Bluebell	1028 Foxglove
714 Bluebell	1029 Foxglove
715 Bluebell	1038 Iris
726 Bluebell	1049 Gardenia
728 Bluebell	1079 Heather
731 Bluebell	1103 Iris
734 Bluebell	1122 Iris
759 Althea	1136 Iris
761 Althea	1173 Bobwhite
773 Althea	1200 Cardinal
778 Laurel Bay	1221 Cardinal
807 Azalea	1238 Dove
814 Azalea	1241 Dove
815 Azalea	1242 Dove
818 Azalea	1248 Dove
820 Azalea	1262 Dove
821 Azalea	1265 Dove
831 Azalea	1267 Dove
832 Azalea	1289 Eagle
834 Azalea	1298 Eagle
835 Azalea	1300 Eagle
841 Azalea	1303 Eagle
853 Dolphin	1304 Eagle
858 Dolphin	1315 Albatross
869 Cobia	1316 Albatross
874 Cobia	1320 Albatross
875 Cobia	1338 Albatross

Laurel Bay Underground Storage Tank Assessment Reports for: (143 addresses/146 tanks) cont.

1340 Albatross	
1342 Albatross	
1344 Cardinal	
1345 Cardinal	
1349 Cardinal	
1355 Cardinal	
1366 Cardinal	
1374 Dove	
1375 Dove	
1415 Albatross	